


1 Place the Mount

Open the C-clamp on the bottom of the mount by turning the clamp knob counter clockwise. Tighten the clamp knob to secure on mounting area. Slide optional rubber clamp boot onto the top of the mount's clamp to prevent scratching clamp surface if desired.

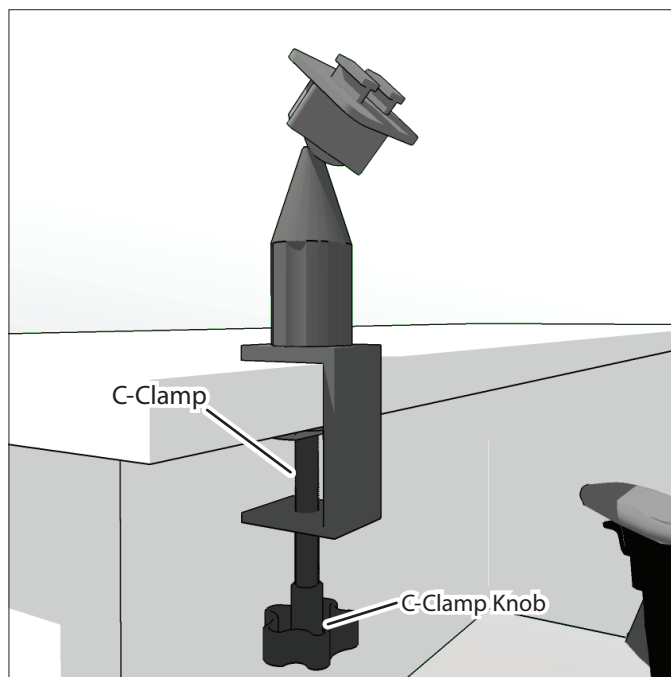

Package Contents:

GN085-SBH - 4" Heavy Duty C-Clamp Mount

TAB001 - Slim-Grip® Universal Tablet Holder

OPTIONAL - (1) Rubber Clamp Boot




C-Clamp opens as wide as 1.5" and closes as tight as .25"

The Slim-Grip Universal Tablet Holder fits all tablets with 8.9" - 18.4" screen size. It includes 4 short, 2 medium, and 4 long support legs. Select a combination of 4 support legs in conjunction for use with the spring-loaded holder to achieve the perfect fit for your tablet.


2 Attach the Holder

Attach holder to the C-clamp mount by inserting the Dual-T Tabs into the holder and sliding the holder down to lock.

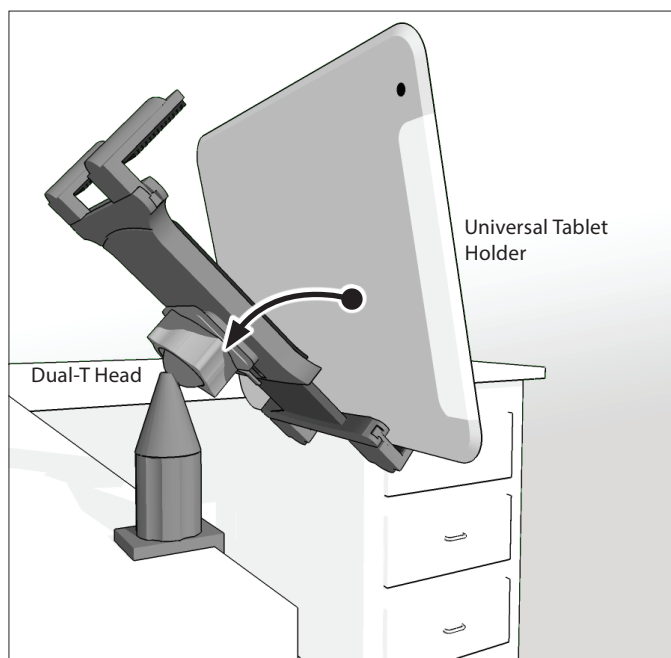

3 Mount a Tablet

Insert tablet into holder by pushing down on the bottom spring-loaded support legs with the tablet. Slide the top of the tablet under the top support legs until it fits snugly in the holder.

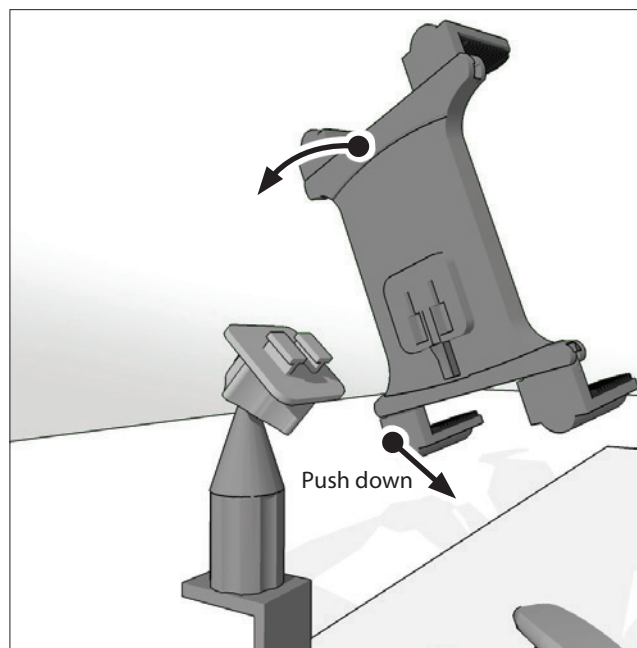

Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and/or air bag deployment.

Arkon is not responsible for any damages caused to your car, your device, or yourself due to the installation or use of this pedestal mount.

ARKON
RESOURCES INC.

The Mobile Mounting Specialists™