

# NIGHTSTICK®

Tough, Durable, Affordable™

## Professional Lighting Products

*Military*

*Law Enforcement*

*Fire/EMS*

*Automotive*

*Aviation*

*Industrial*

*Marine*



**BAYCO**  
PRODUCTS INC.  
**30+**  
**YEARS**  
SINCE 1984

# 2016

## Mini-TAC Pgs 8-9



## Mini-TAC Pro Pgs 10-11



## Mini-TAC UV Pgs 12-13





# Tactical Pgs 14-43

**TAC 300 Series** Waterproof

**TAC 400 Series** Rechargeable / Waterproof

**TAC 500 Series** Rechargeable / Waterproof / Multi-Function



Also available in:



Also available in:



Also available in:



## Tactical Dual-Light™ Flashlights Pgs 44-47

Metal / Waterproof / Multi-Function



## Area Lights Pgs 48-51

Rechargeable / Metal / Waterproof



## Long Gun Light Kits

Pgs 52-57



## Helmet Light Kits and Mounts

Pgs 58-65



## Duty/Personal-Size

Pgs 66-79

NSR 9000 Series Rechargeable / Waterproof / Multi-Function



## Full-Size

Pgs 80-83





# Multi-Purpose Pgs 84-103

Multi-Function Polymer / Flashlight / Floodlight / Dual-Light

<p><b>130 L</b></p>  <p>NSP-2422B</p>	<p><b>230 L</b></p>  <p>SLR-2166</p>	<p><b>230 L</b></p>  <p>NSR-2166B</p>	<p><b>230 L</b></p>  <p>NSR-2166R</p>	<p><b>600 L</b></p>  <p>NSR-2168B</p>	<p><b>600 L</b></p>  <p>NSR-2168R</p>
<p><b>130 L</b></p>  <p>NSP-2422R</p>					
<p><b>250 L</b></p>  <p>NSR-2522RM</p>					
<p><b>200 L</b></p>  <p>NSR-2492</p>					
<p>NSP-1206B</p>					
<p><b>9 L</b></p>  <p>NSP-1206R</p>					
<p>NSP-1206R</p>					
<p><b>65 L</b></p>  <p>NSP-1224R</p>					
<p><b>65 L</b></p>					
 <p>NSP-1224B</p>					
<p><b>150 L</b></p>					
 <p>NSP-1260</p>	<p><b>60 L</b></p>  <p>NSP-1400B</p>	 <p>NSP-1400R</p>	 <p>NSP-1400T</p>	 <p>NSP-1402B</p>	 <p>NSP-1404B</p>
<p><b>1200 L</b></p>					
 <p>SLR-2120</p>					
<p><b>650 L</b></p>					
 <p>NSR-2124</p>					


## Headlamps Pgs 104-117



## Safety Lights Pgs 148-151

Safety Lights Flashlight / Safety Light

Rechargeable Safety Lights

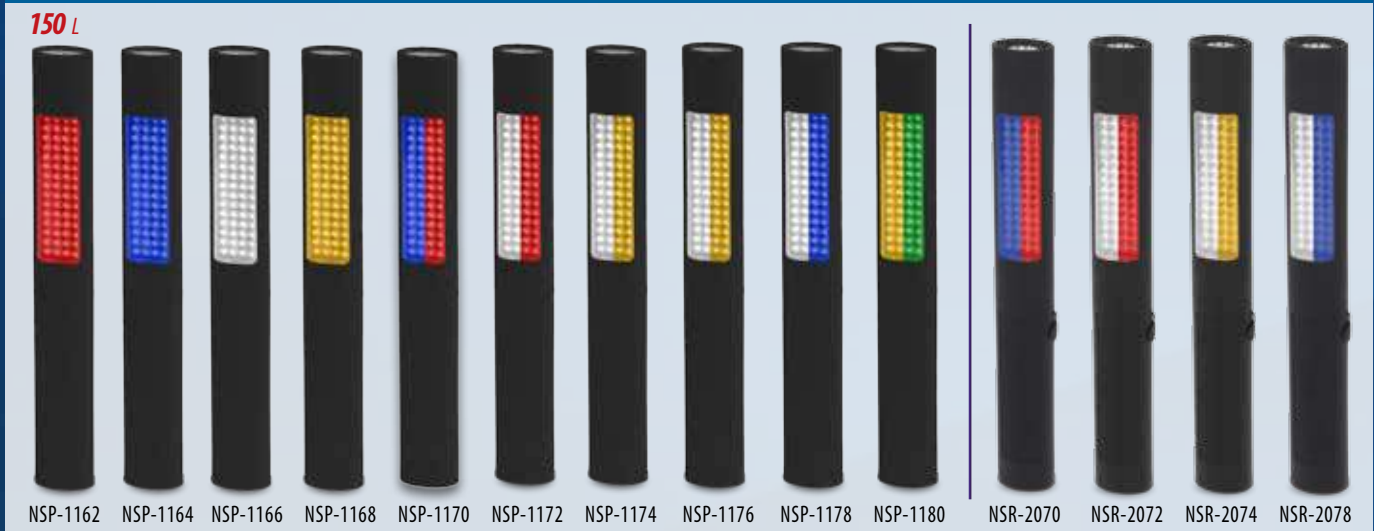

## Traffic Wands Pgs 152-153

Traffic Wands Constant-on / Strobe






# Intrinsically Safe Pgs 118-147

**Penlights / Flashlights / Headlamps / Angle Lights** Non-Rechargeable / Polymer

Nightstick Intrinsically Safe flashlights and headlamps are cETLus, ATEX and IECEx listed Intrinsically Safe

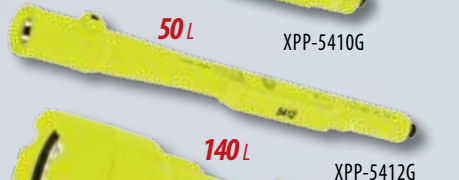

Nightstick Intrinsically Safe Dual-Light Angle Lights are cULus and MSHA listed Intrinsically Safe



# Mini-TAC - Metal

## Mini-TAC



These Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MT-100, 100BL, 100R, 110 and 120 each come with a removable pocket clip, while the MT-130 and MT-140's gooseneck design, comes with a removable clip-on magnet for hands-free use. The MT-110, 120, 130 and 140 also include a removable wrist lanyard. The MT-100s are powered by two AAA batteries. The MT-110 uses a single AA. And both the MT-120, 130 and 140 use two AA batteries. In all cases, the batteries are included.

MT-120



Flashlight



**140 Lumens**

- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



MT-100



MT-100BL



MT-100R



MT-110



MT-130



MT-140B




# Mini-TAC - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MT-100s), 1 AA (MT-110), 2 AA (MT-120/130/140)
- Limited Lifetime Warranty



Magnetic base (MT-130 & MT-140B)



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## INCLUDED


- Flashlight
- Removable pocket clip (MT-100, 100BL, 100R, 110 & 120)
- Removable wrist lanyard (MT-110, 120, 130, & 140)
- Hands-free magnet (MT-130 & MT-140B)
- Battery(ies)



Model	Description	UPC 0 17398
MT-100	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80369 4
MT-100BL	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80425 7
MT-100R	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80426 4
MT-110	Non-rechargeable mini tactical flashlight with 1 AA battery, removable pocket clip and removable wrist lanyard	80370 0
MT-120	Non-rechargeable mini tactical flashlight with 2 AA batteries, removable pocket clip and removable wrist lanyard	80371 7
MT-130	Non-rechargeable mini tactical gooseneck flashlight with 2 AA batteries, removable magnetic base and wrist lanyard	80372 4
MT-140B	Non-rechargeable mini tactical extended gooseneck flashlight with 2 AA batteries, removable magnetic base and wrist lanyard	80509 4


## MT-100 SPECIFICATIONS

- Lumens: 100
- Run-time: 1.5 hours
- Beam distance: 44 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, dia: 0.6in, weight: .8oz




## MT-110 SPECIFICATIONS

- Lumens: 90
- Run-time: 1 hours
- Beam distance: 48 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 3.9in, dia: 0.9in, weight: 1.5oz




## MT-120 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.6in, dia: 0.9in, weight: 2.3oz




## MT-130 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)



## MT-140B SPECIFICATIONS

- Lumens: 180
- Run-time: 2.5 hours
- Beam distance: 99 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 22.5in, diameter: 0.9in, weight: 7.7oz (without magnetic base)



# Mini-TAC Pro - Metal

## Mini-TAC Pro



These Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a waterproof design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type III hard anodized finish. The tail switch on the MT-200, 210 and 220 provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The MT-230, specifically design for EMS, has momentary or constant-on functionality and 3 user-selectable brightness modes as well, but starts off in low and cycles up through the medium and high settings. All 4 lights come with a removable pocket clip. The MT-200 is powered by a two AAA batteries. The MT-210 and 230 each use a single AA. And the MT-220 uses two AA batteries. In all cases, the batteries are included.



MT-220

**200 Lumens**

- Momentary or constant-on, plus 3 user-selectable brightness settings plus strobe (no strobe on MT-230)
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



MT-200



MT-210




MT-230

# Mini-TAC Pro - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight plus 3 brightness levels & strobe (no strobe on MT-230)
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type III hard anodized finish
- Non-slip grip
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by: 2 AAA (MT-200), 1 AA (MT-210/230), 2 AA (MT-220)
- Limited Lifetime Warranty\*



Handheld




High-efficiency deep parabolic reflector







Large textured tail-switch

## INCLUDED

- Flashlight
- Removable pocket clip 
- Battery(ies)

Model	Description	UPC 0 17398
MT-200	Non-rechargeable Mini-TAC Pro flashlight with 2 AAA batteries and pocket clip	80405 9
MT-210	Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip	80373 1
MT-220	Non-rechargeable Mini-TAC Pro flashlight with 2 AA battery, and removable pocket clip	80374 8
MT-230	Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip	80375 5





## MT-200 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>100</b> LUMENS	<b>60</b> LUMENS	<b>30</b> LUMENS
	<b>1h 30min</b>	<b>3h</b>	<b>4h 30min</b>
	<b>51m</b>	<b>36m</b>	<b>29m</b>
	<b>667cd</b>	<b>334cd</b>	<b>204cd</b>



- Length: 5.5in, head diameter: 0.7in, handle diameter: 0.6in, weight: 1.9oz





## MT-210 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>120</b> LUMENS	<b>55</b> LUMENS	<b>30</b> LUMENS
	<b>1h 30min</b>	<b>4h</b>	<b>6h</b>
	<b>70m</b>	<b>51m</b>	<b>40m</b>
	<b>1227cd</b>	<b>656cd</b>	<b>398cd</b>



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz





## MT-220 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>90</b> LUMENS	<b>45</b> LUMENS
	<b>1h 30min</b>	<b>4h</b>	<b>6h</b>
	<b>100m</b>	<b>73m</b>	<b>56m</b>
	<b>2486cd</b>	<b>1335cd</b>	<b>797cd</b>



- Length: 6in, head diameter: 0.9in, handle diameter: 0.6in, weight: 3.2oz

## MT-230 SPECIFICATIONS

FL1 STANDARD	LOW	MEDIUM	HIGH
	<b>3.6</b> LUMENS	<b>10</b> LUMENS	<b>60</b> LUMENS
	<b>36h</b>	<b>14h</b>	<b>2h</b>
	<b>4m</b>	<b>46m</b>	<b>65m</b>
	<b>1076cd</b>	<b>538cd</b>	<b>4cd</b>



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz

# Mini-TAC UV - Metal

## Mini-TAC UV



These Mini-TAC UV lights each use an Ultraviolet LED rated at 365 Nanometers for the purpose of detecting hidden security markings in documents, spotting leak detection fluids and as an aid in visually locating proteins in forensics work. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MTU-106 comes with a removable pocket clip, while the MTU-136, with its gooseneck design, comes with a removable wrist lanyard and a removable clip-on magnet for hands-free use. The MTU-106 is powered by two AAA batteries. And the MTU-136 use two AA batteries. In both cases, the batteries are included.



**365** Nanometers

- 1.25 Hours run-time
- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- MT-136 Includes a magnetic base for hands-free use



**MTU-106**



**MTU-136**

# Mini-TAC UV - Metal

## FEATURES: BOTH MODELS


- Ultraviolet LED technology – 50,000+ hours LED
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MTU-106), 2 AA (MTU-136)
- Limited Lifetime Warranty\*

## MTU-106 SPECIFICATIONS

- Nanometers: 365
- Run-time: 0.75 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, diameter: 0.6in, weight: .8oz

## MTU-136 SPECIFICATIONS

- Nanometers: 365
- Run-time: 1.25 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)

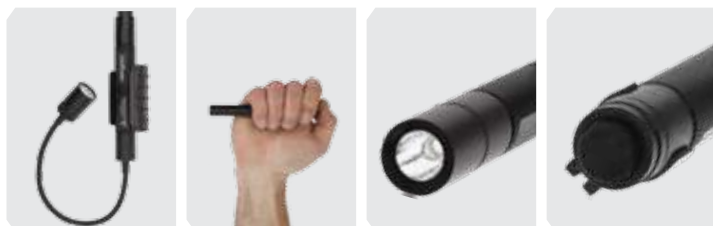

Magnetic base (MTU-136)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

Model	Description	UPC 0 17398
MTU-106	Non-rechargeable mini tactical UV flashlight with 2 AAA batteries and removable pocket clip	80436 3
MTU-136	Non-rechargeable mini tactical gooseneck UV flashlight with 2 AA batteries, clip-on magnet and removable wrist lanyard	80437 0

## INCLUDED

- Flashlight
- Removable pocket clip (MTU-106)
- Removable wrist lanyard (MTU-136)
- Hands-free magnet (MTU-136)
- Batteries



# Tactical Fire Light - Polymer

## Tactical Fire Light



*This compact polymer tactical fire light uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. The 1" handle diameter allows it to be paired with most 3rd party helmet mounts for use by Fire and Emergency personnel. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 180 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 190 meters**
- **Fits most 3rd party 1" helmet mounts**
- **Powered by 2 – CR-123 Lithium batteries (included)**

**FDL-300R**


# Tactical Fire Light - Polymer

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Resistant to high temperatures
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most 3rd party helmet mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
FDL-300R	Red Tactical Fire Light	80361 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure switch



Side-switch



CR-123 batteries



Holster

# Tactical - Polymer

## Tactical Flashlights



These compact polymer tactical flashlights use a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.



Flashlight



**180 Lumens**

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 190 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)

**TAC-300B**



**TAC-300T**

**TAC-300Y**




# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Available in black, tan & yellow
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip

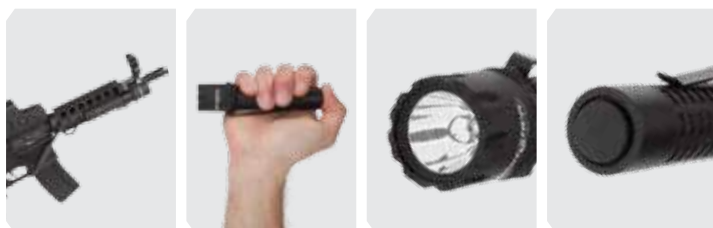

Weapon mountable  
(400B-RPS required)

Handheld

High-efficiency deep  
parabolic reflector

Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-300B	Polymer Tactical Flashlight - Black	80219 2
TAC-300T	Polymer Tactical Flashlight - Tan	80220 8
TAC-300Y	Polymer Tactical Flashlight - Yellow	80221 5
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster

Helmet Mount

Flashlight Strap

Filter Set

Holster

Safety cones

Remote pressure  
switch

Side-switch

CR-123 batteries

Holster

## Tactical - Polymer

# Tactical Flashlight – Green LED



*This compact polymer tactical flashlight uses a Green CREE® LED rated at 150 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 180 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 150 Lumens

- 3.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 180 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)

**TAC-302B**


# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip

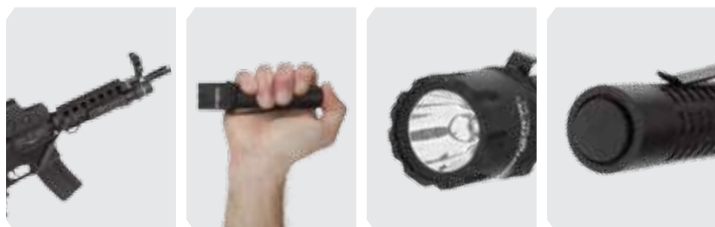

Weapon mountable  
(400B-RPS required)

Handheld

High-efficiency deep  
parabolic reflector

Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0
TAC-302B	Polymer Tactical Flashlight - Green LED	80428 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster

Helmet Mount

Flashlight Strap

Filter Set

Holster

Safety cones

Remote pressure  
switch

Side-switch

CR-123 batteries

Holster

TAC 300 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Polymer**

## Xtreme Lumens™ Tactical Flashlight



*This compact polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



**500** Lumens

- 1.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Glass-filled nylon polymer housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-310XL**



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 1.5 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-310XL	Xtreme Lumens™ Polymer Tactical Flashlight	80417 2
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure  
switch



Side-switch



CR-123 batteries



Holster

**Tactical - Metal****Tactical Flashlight**

*This compact metal tactical flashlight uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight

**180** Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 190 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by 2 – CR-123 Lithium batteries (included)**

**TAC-350B**


# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 5.7oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-350B	Metal Tactical Flashlight	80242 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure  
switch



Side-switch



CR-123 batteries



Holster

TAC 300 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Metal**

## Xtreme Lumens™ Tactical Flashlight

**METAL  
HOUSING**

*This compact metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a pair of included CR-123 Lithium batteries.*

**XTREME  
LUMENS™**

Flashlight



**500 Lumens**

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-360XL**





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 1.5 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle diameter: 1.035in,  
weight: 5.7oz




## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-360XL	Xtreme Lumens™ Metal Tactical Flashlight	80364 9
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6
200-HOLSTER	Holster - Cordura - TAC Series Lights	80233 8
300-HOLSTER	Holster - Cordura - TAC Series Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Dual Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set - Red Green Blue	80498 1
9810-LH	Holster - Basket Weave Leather	98101 9



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Safety cones



Remote pressure  
switch



Side-switch



CR-123 batteries



Holster

## Tactical - Polymer

### Tactical Flashlights Rechargeable



These compact rechargeable polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).



Flashlight



# 200 Lumens

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery


**TAC-400B**

**TAC-400T**
**TAC-400Y**

# Tactical - Polymer

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-400B	Polymer Tactical Flashlight	80126 3
TAC-400T	Polymer Tactical Flashlight	80127 0
TAC-400Y	Polymer Tactical Flashlight	80128 7
TAC-400BDC	No AC power supply	80250 5
TAC-400BLB	Light & battery only	80183 6
TAC-400TDC	No AC power supply	80251 2
TAC-400TLB	Light & battery only	80184 3
TAC-400YDC	No AC power supply	80252 9
TAC-400YLB	Light & battery only	80185 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure  
switch



Side-switch



Spare Lithium-ion  
rechargeable battery



Direct wire kit



Holster

TAC 400 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS**™

**Tactical - Xtreme Lumens™ - Polymer**

## Xtreme Lumens™ Tactical Flashlight Rechargeable

**POLYMER  
HOUSING**

*This compact rechargeable polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



**XTREME  
LUMENS**™

Flashlight



**800** Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-410XL**



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000+ hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Weapon mountable (400B-RPS required)



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-410XL	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80418 9
TAC-410XLDC	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80430 1
TAC-410XLLB	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80431 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
560-BATT	Rechargeable Li-ion battery	80518 6
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure switch



Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

**Tactical - Metal****Tactical Flashlight  
Rechargeable**

*This compact rechargeable metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*

Flashlight

**200** Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-450B**

# Tactical - Metal

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-450B	Metal Tactical Flashlight	80243 7
TAC-450BDC	No AC power supply	80254 3
TAC-450BLB	Light & battery only	80253 6
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Flashlight Strap



Filter Set



Holster



Pocket Clip



Safety cones



Remote pressure  
switch



Side-switch



Spare Lithium-ion  
rechargeable battery



Direct wire kit



Holster

TAC 400 Series

**NIGHTSTICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Metal**

## Xtreme Lumens™ Tactical Flashlight Rechargeable

**METAL  
HOUSING**

*This compact rechargeable metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 230 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



**XTREME  
LUMENS™**

Flashlight



**800** Lumens

- **2 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 230 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-460XL**





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier

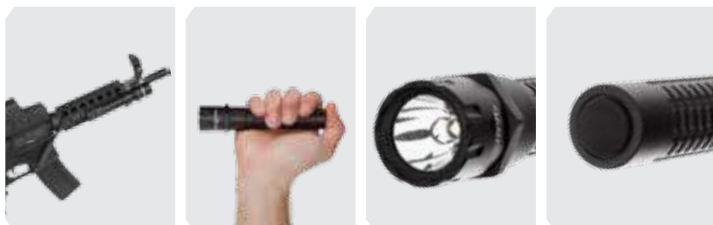

Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-460XL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80418 9
TAC-460XLDL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80430 1
TAC-460XLLB	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80431 8
200-RONE	Red safety cone	80131 7
200-YONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
560-BATT	Rechargeable Li-ion battery	80518 6
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Safety cones Remote pressure switch Side-switch Spare Lithium-ion rechargeable battery Direct wire kit Holster

## Tactical - Polymer

# Tactical Flashlights

## Rechargeable - Multi-Function



These compact rechargeable multi-function polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).


**TAC-500B**

# 200 Lumens

- 3 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery


**TAC-500T**
**TAC-500Y**

# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>125</b> LUMENS	<b>65</b> LUMENS
	<b>3h</b>	<b>6h</b>	<b>12h</b>
	<b>210m</b>	<b>150m</b>	<b>95m</b>
	<b>12000cd</b>	<b>4951cd</b>	<b>2250cd</b>



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-500B	Polymer Tactical Flashlight	80244 4
TAC-500T	Polymer Tactical Flashlight	80245 1
TAC-500Y	Polymer Tactical Flashlight	80246 8
TAC-500BDC	No AC power supply	80256 7
TAC-500BLB	Light & battery only	80255 0
TAC-500TDC	No AC power supply	80258 1
TAC-500TLB	Light & battery only	80257 4
TAC-500YDC	No AC power supply	80260 4
TAC-500YLB	Light & battery only	80259 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

TAC 500 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Polymer**

## Xtreme Lumens™ Tactical Flashlight Rechargeable - Multi-Function



High



Medium



Low



Strobe



**800 Lumens**

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

*This compact rechargeable multi-function polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



**TAC-510XL**



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>800</b> LUMENS	<b>350</b> LUMENS	<b>140</b> LUMENS
	<b>2h</b>	<b>3h 45min</b>	<b>8hr 45min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-510XL	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80419 6
TAC-510XLCD	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80432 5
TAC-510XLLB	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80433 2
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
560-BATT	Rechargeable Li-ion battery	80518 6
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

TAC 500 Series

**NIGHTSTICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Metal**

## Xtreme Lumens™ Tactical Flashlight Multi-Function



*This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a pair of CR-123 batteries (included) installed into the CR-123 Battery Carrier (included). The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. This light can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords.*



**800 Lumens**

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to be a rechargeable light

**TAC-540XL**



# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*

## SPECIFICATIONS



- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-1.5 hrs, medium-2 hrs, low-4.5 hrs, strobe-2.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>800</b> LUMENS	<b>350</b> LUMENS	<b>140</b> LUMENS
	<b>1h 30min</b>	<b>2h</b>	<b>4h 30min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>



## INCLUDED

- Flashlight
- CR-123 back-up battery carrier
- 2 - CR-123 Lithium batteries

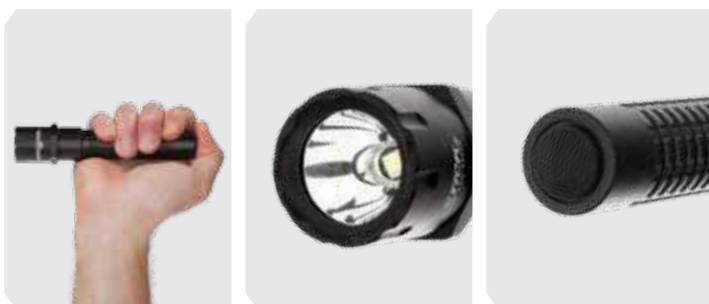

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-540XL	Non-rechargeable battery included metal Xtreme Lumens tactical flashlight with CR-123 Battery Carrier and two CR-123 Lithium batteries - Black	80366 3
560-BATT	Rechargeable Li-ion battery	805186
400-CHGR1	Charger for TAC-400 & TAC-500 series flashlights	80142 3
9914-ACCORD	AC power supply cord	81046 3
9914-DCCORD	DC power supply cord - temporary charging from a vehicle cigarette lighter/DC outlet	81047 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
9914-DW	Vehicle direct wire kit - for use with optional 400-CHGR1	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



DC power supply cord



AC power supply cord



Charger



Safety cones



Lithium-ion rechargeable battery



Direct wire kit

## Tactical - Metal

# Tactical Flashlight

## Rechargeable - Multi-Function



*This compact rechargeable multi-function metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



# 200 Lumens

- **3 Hours run-time**
- **Momentary or constant-on with 3 brightness levels & strobe**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-550B**




# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>125</b> LUMENS	<b>65</b> LUMENS
	<b>3h</b>	<b>6h</b>	<b>12h</b>
	<b>210m</b>	<b>150m</b>	<b>95m</b>
	<b>12000cd</b>	<b>4951cd</b>	<b>2250cd</b>



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-550B	Metal Tactical Flashlight	80247 5
TAC-550BDC	No AC power supply	80262 8
TAC-550BLB	Light & battery only	80261 1
200-RCONC	Red safety cone	80131 7
200-YCONC	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster

TAC 500 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Tactical - Xtreme Lumens™ - Metal**

## Xtreme Lumens™ Tactical Flashlight Rechargeable - Multi-Function

**METAL  
HOUSING**



*This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



**XTREME  
LUMENS™**

**800 Lumens**

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**TAC-560XL**



# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>800</b> LUMENS	<b>350</b> LUMENS	<b>140</b> LUMENS
	<b>2h</b>	<b>3h 45min</b>	<b>8h 45min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>




## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-560XL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80367 0
TAC-560XLDC	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80400 4
TAC-560XLLB	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80401 1
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
560-BATT	Rechargeable Li-ion battery	80518 6
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6
200-HOLSTER	Holster-Cordura-TAC Lights	80233 8
300-HOLSTER	Holster-Cordura-TAC Lights	80454 7
NS-HMC1	Multi-Angle Helmet Mount	80451 6
NS-HSR1	Heavy-Duty Flashlight Strap	80441 7
200-FILTER	TAC Light Filter Set	80498 1
9810-LH	Holster-Basket Weave Leather	98101 9
NS-PC1	Snap-on Pocket Clip	80461 5



Holster



Helmet Mount



Filter Kit



Holster



Pocket Clip



Safety cones



Flashlight Strap



Spare Lithium-ion rechargeable battery



Direct wire kit



Holster



## Tactical Dual-Light Flashlight

### Tactical Dual-Light™ Flashlight Multi-Function



The NSP-9842XL Xtreme Lumens™ Multi-Function Tactical Dual-Light Flashlight uses a CREE® LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 280 meters. A 200 lumen unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The NSP-9842XL has a unique tail-switch that operates both the flashlight and floodlight in one configuration. The upper portion of the switch operates the flashlight that provides both momentary or constant-on functionality with high, medium or low-brightness settings as well as a disorienting strobe and the lower portion of the switch operates a downward facing floodlight. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum with a Type III hard-anodized finish. Power comes from 2 CR-123 batteries.



**650** Flashlight Lumens  
**200** Floodlight Lumens  
**400** Dual-Light Lumens

- Xtreme Lumens™ design
- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on, 3 brightness levels & strobe
- Beam distance rated at 280 meters
- Powered by 2 CR-123 batteries

NSP-9842XL



# Tactical Dual-Light Flashlight



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Dual-function tail-switch
- 1" Handle diameter
- IP-X7 rated waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 CR-123 Lithium batteries
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*

## INCLUDED

- Flashlight
- CR-123 battery carrier
- 2 CR-123 batteries



## SPECIFICATIONS

- Flashlight lumens: high-650, medium-250, low-150
- Flashlight run-time: high-1.5hrs, medium-4hrs, low-6.5hrs
- Floodlight lumens: 200
- Floodlight run-time: 3hrs
- Dual-Light lumens: 400
- Dual-Light run-time: 2.5 hrs
- Candela: 19,112
- Recharge time: 4 hours (typical)
- Beam distance: 280 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in, head diameter: 1.5in, handle diameter: 1.1in, weight: 7.5oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	250 LUMENS	150 LUMENS
	1h 30min	4h	6h 30min
	280m	217m	79m
	19112cd	11733cd	1571cd
	2m		
	1m		

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSP-9842XL	Tactical Dual-Light Flashlight with battery carrier and 2 CR-123 batteries	80488 2
9844-BATT	Replacement Lithium-ion battery	80
9600-USB	USB cord - 27in	80227 7
9800-RCONE	Red cone	80527 8
9800-YCONE	Yellow cone	80528 5
9800-BCONE	Blue cone	80526 1
9844-CHGR1	Charger	80
9842-CARRIER	Back-up CR-123 battery carrier	80





## Tactical Dual-Light Flashlight

### Tactical Dual-Light<sup>™</sup> Flashlight Rechargeable - Multi-Function



The NSR-9844XL Rechargeable Xtreme Lumens<sup>™</sup> Multi-Function Tactical Dual-Light Flashlight uses a CREE<sup>®</sup> LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 280 meters. A 200 lumen unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The NSR-9844XL has a unique tail-switch that operates both the flashlight and floodlight in one configuration. The upper portion of the switch operates the flashlight that provides both momentary or constant-on functionality with high, medium or low-brightness settings as well as a disorienting strobe and the lower portion of the switch operates a downward facing floodlight. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum with a Type III hard-anodized finish. Power comes from a rechargeable Lithium-ion battery.



**650** Flashlight Lumens  
**200** Floodlight Lumens  
**400** Dual-Light Lumens

- Xtreme Lumens<sup>™</sup> design
- Flashlight/Floodlight/Dual-Light<sup>™</sup>
- Momentary or constant-on, 3 brightness levels & strobe
- Beam distance rated at 280 meters
- Powered by rechargeable Lithium-ion battery

**NSR-9844XL**



# Tactical Dual-Light Flashlight



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Dual-function tail-switch
- 1" Handle diameter
- IP-X7 rated waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*






## INCLUDED

- Flashlight
- Rechargeable Lithium-ion Battery
- Back-up CR-123 battery carrier
- Wall/vehicle mountable charger
- AC Power Supply
- 12 V DC Power Supply



## SPECIFICATIONS

- Flashlight lumens: high-650, medium-250, low-150
- Flashlight run-time: high-1.5hrs, medium-4hrs, low-6.5hrs
- Floodlight lumens: 200
- Floodlight run-time: 3hrs
- Dual-Light lumens: 400
- Dual-Light run-time: 2.5 hrs
- Candela: 19,112
- Recharge time: 4 hours (typical)
- Beam distance: 280 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in, head diameter: 1.5in, handle diameter: 1.1in, weight: 8oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650</b> LUMENS	<b>250</b> LUMENS	<b>150</b> LUMENS
	<b>1h 30min</b>	<b>4h</b>	<b>6h 30min</b>
	<b>280m</b>	<b>217m</b>	<b>79m</b>
	<b>19112cd</b>	<b>11733cd</b>	<b>1571cd</b>
	<b>2m</b> <b>1m</b>		

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9844XL	Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords	80489 9
NSR-9844XLDC	Rechargeable Tactical Dual-Light Flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord	80529 2
NSR-9844XLLB	Rechargeable Tactical Dual-Light Flashlight with battery	80530 8
9844-BATT	Replacement Lithium-ion battery	80
9600-USB	USB cord - 27in	80227 7
9800-RCONE	Red cone	80527 8
9800-YCONE	Yellow cone	80528 5
9800-BCONE	Blue cone	80526 1
9844-CHGR1	Charger	80



## Area Lights - Rechargeable

# LED Area Light with Magnetic Base Rechargeable

Flood High



Flood Low



The NSR-1514 Rechargeable LED Area Light with Magnetic Base is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light includes an adjustable handle, and AC and DC power supplies.

# 1000 Floodlight Lumens


**NSR-1514**


- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel design with magnetic base
- Rechargeable Li-ion
- Includes AC and DC power supplies



# Area Lights - Rechargeable

## FEATURES: ALL MODELS

- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel fixture design
- Powerful magnetic base for hands-free operation
- Multi-fin heat sink keeps light cool to the touch
- LED is rated at 50,000 hours of life
- Adjustable comfort-grip handle
- Single sealed push button switch
- Tempered glass lens
- Powder coated for long wear
- IP-X7 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC and DC power supplies
- 1 Year Limited warranty\*

## SPECIFICATIONS

- High Floodlight Lumens – 1000
- Low Floodlight Lumens – 500
- High Floodlight Run-time – 4hrs
- Low Floodlight Run-time – 8hrs
- Water Rating – IP-X7 waterproof
- Drop Rating – 2m
- Length: 6.1in (155mm), width: 3.5in (89mm), height: 12in (305mm) weight: 52.8oz (1496g)

## INCLUDED

- Area Light
- Adjustable handle
- AC/DC power supplies



Magnetic Base



Hanging Handle



Charging Port



Area Light, AC/DC Power Supplies

Model	UPC 0 17398
NSR-1514	80544 5

## Area Lights - Rechargeable

### LED Area Light Kit Rechargeable

Flood High



Flood Low



# 1000 Floodlight Lumens



- High/Low brightness modes
- Constructed from 6061-T6 aluminum
- Multi-angle tilt and swivel design w/ magnetic base
- Rechargeable Li-ion
- Includes 6' tripod, AC and DC power supplies and carrying case

The NSR-1514C Rechargeable LED Area Light Kit is perfect when portability is important. This area light cranks out an impressive 1,000 lumens of light on high and 500 lumens on low using a single sealed push button switch. The housing is constructed from lightweight 6061-T6 aluminum and the multi-fin heat sink design keeps the fixture cool to the touch. The light can be swiveled independently allowing the user to position the fixture exactly wherever light is needed and the heavy-duty magnetic base allows the light to be attached to most metal surfaces for hands-free operation. The area light kit includes an adjustable handle, a 6' tripod with camlock adjusters, and AC and DC power supplies all placed inside a durable carrying case.


**NSR-1514C**

# Area Lights - Rechargeable

## FEATURES: ALL MODELS

- High/Low brightness modes
- Constructed from lightweight 6061-T6 aluminum
- Multi-angle tilt and swivel fixture design
- Powerful magnetic base for hands-free operation
- 6' tripod with camlock adjusters
- Placed inside a durable carrying case
- Multi-fin heat sink keeps light cool to the touch
- LED is rated at 50,000 hours of life
- Adjustable comfort-grip handle
- Single sealed push button switch
- Tempered glass lens
- Powder coated for long wear
- IP-X7 rated waterproof
- Impact and chemical resistant design
- Meets requirements of NFPA-1971-8.6 (2013)
- Rechargeable Li-ion
- Includes AC and DC power supplies
- 1 Year Limited warranty\*

## SPECIFICATIONS

- High Floodlight Lumens – 1000
- Low Floodlight Lumens – 500
- High Floodlight Run-time – 4hrs
- Low Floodlight Run-time – 8hrs
- Water Rating – IP-X7 waterproof
- Drop Rating – 2m
- Length: 32in (813mm), width: 5in (127mm), height: 16in (406mm) weight: 288oz (3629g)

## INCLUDED

- Area Light
- Adjustable handle
- 6' tripod
- AC/DC power supplies
- Carrying case



Area Light with Magnetic Base



Tripod Base



Camlock Adjusters



AC/DC Power Supplies



Area Light and Tripod in Carrying Case

<b>Model</b>	<b>UPC 0 17398</b>
NSR-1514C	80560 5

## Long Gun Light Kits

### Tactical Long Gun Light Kit



The Nightstick Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-300B polymer tactical light rated at 180 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-300B is distance rated at 190 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-300B is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-300B becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



# 180 Lumens

- 190 Meter beam distance
- 3 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-300B-K01**

# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-300B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries



Model	UPC 0 17398
TAC-300B-K01	80368 7

## Long Gun Light Kits

# Varmint Hunter Green LED Light Kit



The Nightstick Varmint Hunter Green LED Light Kit provides everything necessary to add a high-power Green LED light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-302B polymer Green LED light rated at 150 lumens. Combined with a high-efficiency deep parabolic reflector, the beam is distance rated at 180 meters...perfect for long-distance target acquisitions. When paired with the included Remote Pressure Switch, the TAC-302B becomes the perfect addition to any varmint hunter's weapon. With its momentary on/off design, the Remote Pressure Switch assures the hunter of complete control over the full power of the light.

Flashlight



# 150 Lumens

- 180 Meter beam distance
- 3.5 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail

**TAC-302B-K01**

# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-302B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries



Model	UPC 0 17398
TAC-302B-K01	80429 5



TAC 400 Series

**NIGHTSTICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS**™

## Long Gun Light Kits

# Tactical Long Gun Light Kit

## Upgradable to Rechargeable

**METAL  
HOUSING**

The Nightstick Xtreme Lumens™ Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-460XL tactical light rated at 800 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-460XL is distance rated at 205 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-460XL is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-460XL becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



**800 Lumens**

- 2 Hours run-time
- Remote pressure switch with momentary on/off control
- Beam distance rated at 205 meters
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail

**XTREME  
LUMENS**™



TAC-460XL-K01





# Long Gun Light Kits




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Serialized for personal identification
- Includes momentary or constant-on tail switch so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included) using the included CR-123 Battery Carrier
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 7.6oz (with RPS)



## INCLUDED

- TAC-460XL flashlight
- Standard tail-switch
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- CR-123 back-up battery carrier
- Two CR-123 Lithium batteries



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch



<b>Model</b>	<b>UPC 0 17398</b>
TAC-460XL-K01	80420 2

## Helmet Light Kits and Mounts

### Heavy-Duty Dual Flashlight Strap

- **Universal design fits virtually any helmet or hardhat**
- **High temperature rated at over 500°F**
- **Constructed from thick-walled black silicone rubber**

*The Heavy-Duty Dual Flashlight Strap is a universal design that will fit virtually any Fire Helmet or Hard Hat. The dual holes located on each side of the strap allow the user to position any flashlight or object up to 1.25" in diameter in either hole or even both holes at the same time. Constructed from thick-walled black silicone rubber, the chemical resistant and waterproof NS-HSR1 is designed to stay in place even in wet conditions. The NS-HSR1 meets requirements of NFPA-1971-8.6 (2013).*



**NS-HSR1**



(Helmet and light not included)

# Helmet Light Kits and Mounts

## FEATURES


- Universal design fits virtually any helmet or hardhat
- High temperature rated at over 500°F
- Constructed from thick-walled black silicone rubber
- Dual holes on each side allow for right, left or both side placement of light
- Will hold any flashlight or object up to 1.25" in diameter
- Stays in place even in wet conditions
- Chemical resistant
- Waterproof
- Meets the requirements of NFPA-1971-8.6 (2013)
- Fits helmets with circumference: 24in - 34in
- Material temperature rating: -67°F – 572°F
- Length: 12in, Width: 1.875in
- Wall thickness: .125in, Hole diameter: 1.1875in, Hole spacing: 2.5in, Weight: 3.4oz
- Limited 1 Year Warranty \*\*



Heavy-Duty Silicone Rubber



Dual hole design

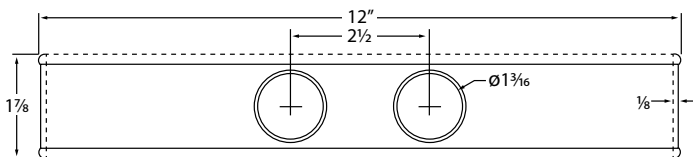

Model	UPC 0 17398
NS-HSR1	80441 7



Fits any light up to 1.25" in diameter

## Helmet Light Kits and Mounts

### Multi-Angle Helmet Mount



The Multi-Angle Helmet Mount is a mounting bracket for attaching a flashlight that has a 1" handle diameter to the brim of virtually any Fire Helmet or Hard Hat. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The NS-HMC1 meets the requirements of NFPA-1971-8.6 (2013).



**NS-HMC1**

- **Works with virtually all fire helmets and hard hats**
- **Fits any flashlight with a 1" handle diameter**
- **140 Degrees of adjustability**
- **Meets the requirements of NFPA-1971-8.6 (2013)**



# Helmet Light Kits and Mounts

## FEATURES

- Works with virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Fits any Nightstick TAC light or any flashlight with a 1" handle diameter
- Cast from ADC12 aluminum alloy
- Meets the requirements of NFPA-1971-8.6 (2013)
- Includes mount, light mounting allen set screw, 2 different length brim mounting allen set screws, and allen wrench
- Length: 3.1in, Width: 1.3in, Height: 0.9in, Weight: 1.7oz
- Limited Lifetime Warranty\*

## INCLUDED

- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench



Multi-angle helmet mount



Cast from ADC12 aluminum alloy



Fits virtually all hard hats




Model	UPC 0 17398
NS-HMC1	80451 6

# Helmet Light Kits and Mounts

## Tactical Fire Light With Multi-Angle Helmet Mount



Flashlight


 140°  
Rotation

The Tactical Fire Light w/ Multi-Angle Helmet Mount is a complete system for attaching the Tactical Fire Light to any Fire Helmet or Hard Hat. The Tactical Fire Light is rated at 180 Lumens and has a tight long-throw beam that is distance rated at 190 meters. The entire system is IP-X7 waterproof and is drop rated at 2 meters. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The FDL-300R-K01 meets the requirements of NFPA-1971-8.6 (2013).



# 180 Lumens


- 180 Lumens
- 3 Hours run-time
- Momentary or constant-on
- Can be mounted to virtually all fire helmets and hard hats
- 140 Degrees of adjustability
- Meets the requirements of NFPA-1971-8.6 (2013)

**FDL-300R-K01**


# Helmet Light Kits and Mounts

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Large textured tail-switch
- Will fit on virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Glass-filled nylon polymer flashlight housing
- Mount is cast from ADC12 aluminum alloy
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch




Multi-angle helmet mount



## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 6.1oz



## INCLUDED


- FDL-300R flashlight
- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench
- Two CR-123 Lithium batteries



Model	UPC 0 17398
FDL-300R-K01	80368 7

## Helmet Light Kits and Mounts

# Helmet-Mounted Multi-Function Dual-Light™ Flashlight

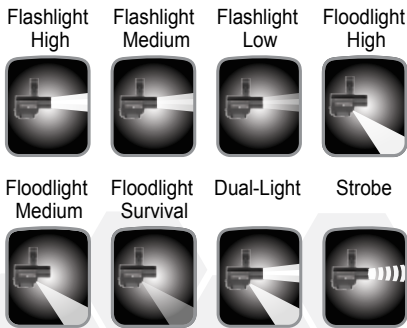

TECHNOLOGY

**220** Flashlight Lumens

**100** Floodlight Lumens

**175** Dual-Light™ Lumens

- User-selectable brightness on Flashlight & Floodlight including 15 Lumen Survival mode on Floodlight
- Works with virtually all fire helmets and hard hats
- Meets the requirements for NFPA-1971-8.6 (2013)



The NSP-4650B Helmet-mounted Multi-Function Dual-Light™ Flashlight is the most versatile choice for helmet-mounted hands-free lighting. The 4650 outshines the competition with its powerful 220 lumen tightly-focused flashlight and a beam distance rating of 183 meters (600 feet). The user can choose from two additional lower lumen settings at 100 or 30 lumens for the ability to dial-in just the right amount of concentrated light. Located just below the flashlight angled at 45 degrees, is a user-selectable brightness floodlight with 100 or 50 lumens for typical use, as well as a "Survival" mode at 15 lumens for emergency situations.



**NSP-4650B**



# Helmet Light Kits and Mounts

## FEATURES

- Flashlight – Floodlight – Dual-Light™
- CREE® LED technology – 50,000+ hours LED life
- User-selectable brightness on Flashlight & Floodlight including 15 Lumen Survival mode on Floodlight
- Works with virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to select exact angle and position for optimum light alignment and clearance of face shields, goggles or other equipment
- Rear-facing Green Safety LED
- Cast from ADC12 aluminum alloy
- Waterproof
- Impact & chemical resistant
- Meets the requirements for NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 – CR-123 batteries (included)
- Limited Lifetime Warranty\*



## SPECIFICATIONS

- Lumens: flashlight high: 220, medium: 100, low: 30, strobe: 175, floodlight high: 100, medium: 50, survival: 15, dual-light: 175
- Run-time: flashlight high: 3hr 30min, medium: 10hr, low: 33hr 30min, strobe: 6hr, floodlight high: 10hr, medium: 21hr 30min, survival: 60hr
- Beam distance: 183 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 3.23in, width: 1.42in, bezel diameter: 1.14in, weight: 6.5oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	220 LUMENS	100 LUMENS	30 LUMENS
	3h 30min	10h	33h
	183m	120m	59m
	8073cd	3669cd	861cd
	2m 1m		



## INCLUDED

- Light
- Two different length brim mounting Allen set screws
- Allen wrench
- 2 – CR-123 Lithium batteries



Model	UPC 0 17398
NSP-4650B	80471 4



## Duty/Personal-Size - Polymer

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



High



Medium



Low



Strobe



These rechargeable polymer multi-function duty/personal-size flashlights use a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 325 meters. The body & tail-cap switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.



NSR-9514XL

# 650 Lumens


- 6.5 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 325 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



# Duty/Personal-Size - Polymer

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap & 316 stainless steel bezel, both with Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: high-650, medium-200, low-50, strobe-300
- Run-time: high-6.5 hrs, medium-9 hrs, low-12 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 325 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>200 LUMENS</b>	<b>50 LUMENS</b>
	<b>6h 30 min</b>	<b>9h</b>	<b>12h</b>
	<b>325m</b>	<b>235m</b>	<b>118m</b>
	<b>23976cd</b>	<b>12075cd</b>	<b>6200cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9514XL	Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring	80304 5
NSR-9514XLD	Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring	80307 6
NSR-9514XLLB	Rechargeable dual switch black polymer flashlight with battery and anti-roll ring	80310 6
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9810-LH	Leather holster	98101 9
9914-DW	Direct wire kit	80044 0



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

## Duty/Personal-Size - Polymer

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



These rechargeable polymer multi-function duty/personal-size flashlights use a CREE® LED rated at 350 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 313 meters. The body & tail-cap switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.


**NSR-9514Y**

# 350 Lumens

- 4.25 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 313 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



# Duty/Personal-Size - Polymer

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap & 316 stainless steel bezel, both with Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



## SPECIFICATIONS

- Lumens: high-350, medium-200, low-55, strobe-300
- Run-time: high-4.25 hrs, medium-8.5 hrs, low-32.5 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 313 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>350</b> LUMENS	<b>200</b> LUMENS	<b>55</b> LUMENS
	<b>4h 15min</b>	<b>8h 30min</b>	<b>32h 30min</b>
	<b>313m</b>	<b>235m</b>	<b>118m</b>
	<b>24100cd</b>	<b>12075cd</b>	<b>6200cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9514Y	Rechargeable dual switch yellow polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring	80474 5
NSR-9514YDC	Rechargeable dual switch yellow polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring	80496 7
NSR-9514YLB	Rechargeable dual switch yellow polymer flashlight with battery and anti-roll ring	80497 4
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9810-LH	Leather holster	98101 9
9914-DW	Direct wire kit	80044 0



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

## Duty/Personal-Size - Metal

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



*This rechargeable metal multi-function duty/personal-size flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 325 meters. The body & tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.*



# 650 Lumens

- 6.5 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 325 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery


NSR-9614XL



# Duty/Personal-Size - Metal

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing/tail-cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Body & tail-switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: high-650, medium-200, low-50, strobe-300
- Run-time: high-6.5hrs, medium-9 hrs, low-12 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 325 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 12.8oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650</b> LUMENS	<b>200</b> LUMENS	<b>50</b> LUMENS
	<b>6h 30 min</b>	<b>9h</b>	<b>12h</b>
	<b>325m</b>	<b>235m</b>	<b>118m</b>
	<b>23976cd</b>	<b>12075cd</b>	<b>6200cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9614XL	Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring/black	80217 8
NSR-9614XLDC	Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring/black	80231 4
NSR-9614XLLB	Rechargeable dual switch metal flashlight with battery and anti-roll ring	80232 1
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9810-LH	Leather holster	98101 9
9914-DW	Direct wire kit	80044 0



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Polymer**

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum tail-cap and a 316 stainless steel bezel. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight Lumens

**200** Floodlight Lumens

**400** Dual-Light™ Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9920XL**




# Duty/Personal-Size - Xtreme Lumens™ - Polymer




## FEATURES


- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail cap and 316 stainless steel bezel both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Hands-free tail cap magnet



## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.9oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	300 LUMENS	150 LUMENS
	3h	6h	14h
	275m	200m	146m
	18675cd	9687cd	4857cd
	2m		
	1m		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9920XL	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Red	80388 5
NSR-9920XLDC	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Red	80389 2
NSR-9920XLLB	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with battery and anti-roll ring - Red	80390 8
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

NSR 9900 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

Duty/Personal-Size - Xtreme Lumens™ - Polymer

## Duty/Personal-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum bezel and tail-cap. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



**650** Flashlight  
Lumens

**200** Floodlight  
Lumens

**400** Dual-Light™  
Lumens

NSR-9924XL

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)




# Duty/Personal-Size - Xtreme Lumens™ - Polymer



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum bezel and tail-cap, both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch (tandem operation)
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 9.9oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>150 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>14h</b>
	<b>275m</b>	<b>200m</b>	<b>146m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>4857cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9924XL	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80392 2
NSR-9924XLDC	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80393 9
NSR-9924XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with battery and anti-roll ring - Black	80394 6
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

NSR 9900 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

Duty/Personal-Size - Xtreme Lumens™ - Metal

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



*This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The light is constructed from aircraft-grade 6061 T-6 aluminum and has a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.*



**650** Flashlight Lumens

**200** Floodlight Lumens

**400** Dual-Light™ Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)



NSR-9940XL

# Duty/Personal-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing, bezel and tail-cap
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	300 LUMENS	150 LUMENS
	3h	6h	14h
	275m	200m	146m
	18675cd	9687cd	4857cd
	2m		
	1m		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



High-efficiency deep parabolic reflector

Hands-free tail cap magnet

Wide-beam floodlight

Dual-switch control

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9940XL	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80411 0
NSR-9940XLDC	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80412 7
NSR-9940XLLB	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with battery and anti-roll ring - Black	80413 4
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

NSR 9900 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

Duty/Personal-Size - Xtreme Lumens™ - Metal

## Duty/Personal-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and the bezel is constructed from 316 stainless steel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**200** Floodlight  
Lumens

**400** Dual-Light™  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)




NSR-9944XL

# Duty/Personal-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch tandem operation
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-14 hrs, strobe -6 hrs, floodlight-5.5 hrs, dual-light-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	300 LUMENS	150 LUMENS
	3h	6h	14h
	275m	200m	146m
	18675cd	9687cd	4857cd

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0
NSR-9944XL	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80395 3
NSR-9944XLDC	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80396 0
NSR-9944XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black	80397 7
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

NSR 9700 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Full-Size - Xtreme Lumens™ - Metal**

## Full-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function full-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and bezel is constructed from 316 stainless steel bezel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



**650** Flashlight Lumens  
**200** Floodlight Lumens  
**400** Dual-Light™ Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery (included)



**NSR-9744XL**



# Full-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - Body switch
- Floodlight - Second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Two body switches

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-6 hrs, medium-10.5 hrs, low-26 hrs, strobe-12.5 hrs, floodlight-10, dual-light-8.75
- Recharge time: 6 hours
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 11.8in, head diameter: 1.6in, handle diameter: 1.2in, weight: 17.5oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650</b> LUMENS	<b>300</b> LUMENS	<b>150</b> LUMENS
	<b>6h</b>	<b>10.5h</b>	<b>26h</b>
	<b>275m</b>	<b>200m</b>	<b>146m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>4857cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9744XL	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80382 3
NSR-9744XLDC	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80383 0
NSR-9744XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black	80384 7
9700-BATT	Replacement Lithium-ion battery	80312 0
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red safety cone	80226 0
9600-YCONE	Yellow safety cone	80228 4
9600-BCONE	Blue safety cone	80223 9
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable

NSR 9700 Series

**NIGHT STICK**  
Tough, Durable, Affordable™

**XTREME  
LUMENS™**

**Full-Size - Xtreme Lumens™ - Metal**

## Full-Size Flashlight Rechargeable - Multi-Function



*This Xtreme Lumens™ rechargeable metal multi-function full-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens working in conjunction with a high-efficiency deep parabolic reflector to create a usable beam of light rated at 450 meters. The body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low brightness setting as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.*



**650 Lumens**

- 4 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 450 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**NSR-9746XL**



# Full-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, tail cap and bezel
- Type III hard anodized finish
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch

## SPECIFICATIONS

- Lumens: high-650, medium-390, low-100, strobe-650
- Run-time: high-4 hrs, medium-8 hrs, low-44 hrs, strobe-8 hrs
- Recharge time: 6 hours
- Beam distance: 450 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 12.8in, head diameter: 2.4in, handle diameter: 1.2in, weight: 22.5oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650</b> LUMENS	<b>390</b> LUMENS	<b>100</b> LUMENS
	<b>4h</b>	<b>8h</b>	<b>44h</b>
	<b>450m</b>	<b>295m</b>	<b>70m</b>
	<b>64253cd</b>	<b>25834cd</b>	<b>1528cd</b>
	2m ↓ 1m		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9746XL	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords/black	80240 6
NSR-9746XLDC	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord/black	80316 8
NSR-9746XLLB	Rechargeable single switch metal flashlight with battery	80317 5
9700-BATT	Replacement Lithium-ion battery	80312 0
9600-USB	USB cord - 27in	80227 7
9700-RCONE	Red safety cone	80313 7
9700-YCONE	Yellow safety cone	80314 4
9700-BCONE	Blue safety cone	80315 1
9850-BRW	Basket weave leather belt ring	98501 7
9850-BRN	Nylon belt ring	98502 4
9850-BRPL	Patent leather belt ring	98503 1
9850-BRSL	Standard leather belt ring	98504 8
9000-CHGR5	5 bank charger	80475 2
9914-DW	Direct wire kit	80044 0



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Belt rings

## Multi-Purpose - Polymer

### Multi-Function Flashlights

#### Flashlight-Floodlight-Dual-Light™

These non-rechargeable multi-function Dual-Light™ flashlights use a single body switch offering the user a choice of flashlight, floodlight or dual-light operation. The compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1224 models have an integrated body magnet for hands-free use. Power comes from 2 included AAA batteries (1206) and 4 included AAA batteries (1224).

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**65** Flashlight  
Lumens

**100** Floodlight  
Lumens

**125** Dual-Light™  
Lumens

- 5 Hours run-time
- Integrated hands-free magnet (1224)
- Focused-beam flashlight
- Wide-area non-focused floodlight

NSP-1224R

NSP-1224B

NSP-1206R

NSP-1206B




# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Soft-touch grip
- Water resistant
- Non-slip grip
- Comfortable oval shape
- Impact & chemical resistant polymer housing
- Integrated body magnet (1224 only)
- Powered by 4 AAA batteries (1224) & 2 AAA batteries (1206) included
- Limited 1 Year Warranty \*




High-efficiency deep parabolic reflector (1224)

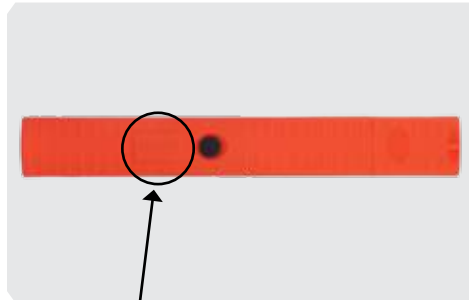

Integrated magnet with single switch control for flashlight floodlight and dual-light (1224)



Four bright LEDs (1206)

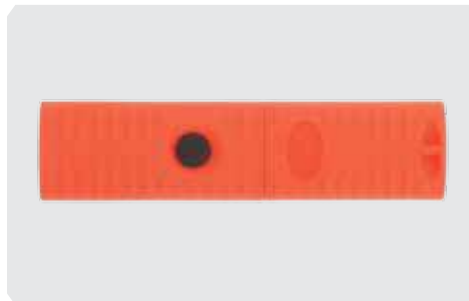


Single switch control for flashlight floodlight and dual-light (1206)

Model	UPC 0 17398
NSP-1206B	80355 7
NSP-1206R	80356 4
NSP-1224B	80357 1
NSP-1224R	80358 8


## NSP-1206R-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1206B-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1224R-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## NSP-1224B-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## INCLUDED

- Flashlight
- 2 AAA batteries (1206) & 4 AAA batteries (1224)



## Multi-Purpose - Polymer

### Multi-Function Flashlight Flashlight-Floodlight-Dual-Light™

Flashlight



Flood High



Flood Low



Dual-Light



*This non-rechargeable multi-function Dual-Light™ flashlight features a focused-beam flashlight for distance illumination and a non-focused floodlight for close-up lighting. With its dual-switch design, the user can select between flashlight as well as full-power or half-power floodlight. Additionally this light offers the ability to turn both the flashlight and the floodlight on at the same time for even greater functionality. A hands-free dual-angle stand, clip-on magnet and impact bumpers are included. Power comes from 4 included AA batteries.*

**150** Flashlight  
Lumens

**120/60** Floodlight  
Lumens

**270** Dual-Light™  
Lumens

- Dual switch function
- Focused-beam flashlight
- Wide-area unfocused floodlight
- Dual-Light™ (flashlight and floodlight together)



TECHNOLOGY



**NSP-1260**



# Multi-Purpose - Polymer

## FEATURES

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Focused beam flashlight
- Wide-beam unfocused floodlight
- Dual-Light (flashlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by four premium AA alkaline batteries (included)
- Limited 1 Year Warranty \*



Dual switch control with impact bumpers (included)



Clip-magnet (included)



High-efficiency deep parabolic reflector



Hands-free stand (included)

## SPECIFICATIONS

- Lumens: flashlight-150, full-power floodlight-120, half-power floodlight-60, dual-light-270
- Run-time: flashlight-10 hrs, full-power floodlight-4 hrs, half-power floodlight-10 hrs, dual-light-3 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, width: 1.3 x .9in, weight: 8.2oz

## INCLUDED

- 4 AA premium alkaline batteries
- Impact bumpers & clip-magnet
- Hands-free dual-angle stand



## MODELS ACCESSORIES

Model	Description	UPC 0 17398
NSP-1260	61 LEDs	80030 3
1160-BASE	Large magnetic base	80026 6
1200-MAGNET	Clip-on magnet	70004 7
1260-BUMPERS	Impact Bumpers	80135 5
1260-RCONE	Red safety cone	80085 3
1260-YCONE	Yellow safety cone	80086 0



Large  
Magnetic base



Clip-on  
magnet



Impact  
bumpers



Safety  
cones



## Multi-Purpose - Polymer

### Dual-Switch Dual-Light<sup>™</sup> Flashlights Non-Rechargeable - Polymer

Flashlight



Floodlight



Dual-Light



These non-rechargeable dual-switch Dual-Light<sup>™</sup> flashlights each have two body switches offering the user a choice of flashlight, floodlight or dual-light operation. Their compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1400B/R/T each have a white flashlight and a white floodlight. The 1402 has a white flashlight and a red floodlight, and the 1404 has a white flashlight and a green floodlight. All models include a removable pocket/belt clip. Power comes from 2 included AAA batteries.

**60** Flashlight Lumens

**25** Floodlight Lumens

**90** Dual-Light<sup>™</sup> Lumens



- 3 Hours run-time
- Focused-beam flashlight
- Wide-area non-focused floodlight
- Floodlight color: White (1400), Red (1402) & Green (1404)



TECHNOLOGY

**NSP-1400B**



**NSP-1400R**

**NSP-1400I**

**NSP-1402B**

**NSP-1404B**



# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED
- Flashlight – floodlight – Dual-Light™
- Focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight (1402) and green floodlight (1404) for night vision preservation
- Dual-Light (flashlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual body switches
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by 2 AAA premium batteries (included)
- 1 Year Limited Warranty\*



High-efficiency deep parabolic reflector



Dual body switches

## INCLUDED


- Flashlight
- 2 AAA batteries
- Removable pocket clip



Model	UPC 0 17398
NSP-1400B	80376 2
NSP-1400R	80377 9
NSP-1400T	80378 6
NSP-1402B	80379 3
NSP-1404B	80380 9


## NSP-1400B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400R SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400T SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1402B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-15
- Run-time: flashlight-3 hrs, floodlight-2.8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



## NSP-1404B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-10
- Run-time: flashlight-3 hrs, floodlight-5.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



**Multi-Purpose - Polymer**

**Dual-Light™ Flashlights  
w/ Dual Magnets**

These non-rechargeable Dual-Light™ flashlights use a CREE® LED rated at 130 lumens paired with a high-efficiency deep parabolic reflector, creating a flashlight beam with an effective range of 181 meters (over 590 feet). Additionally, built into the handle is a 110 lumen floodlight. Unlike the flashlight beam, the light coming out of the floodlight does not have a reflector so the light spreads out in a wide, even, unfocused pattern of light...perfect for lighting up things that are close. The waterproof design, in combination with an impact and chemical resistant engineered polymer housing, make these tough little lights, one of the best values around. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage.

The flashlight is actuated by means of the top body switch providing both momentary and constant-on functionality. The floodlight is operated using the bottom button. Additionally, both lights can be turned on at the same time for even more versatile lighting options. Now you have a light for distance and one for close up work.

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**130** Flashlight  
Lumens

**110** Floodlight  
Lumens

**235** Dual-Light™  
Lumens

- 9.5 Hours run-time
- Two Integrated hands-free magnets
- Beam distance rated at 181 meters



**NSP-2422R**

**NSP-2422B**


# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Powered by 3 AA premium batteries (included)
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-130, floodlight-110, dual-light-235
- Run-time: flashlight-9.5 hrs, floodlight-10.5 hrs, dual-light-6 hrs
- Beam distance: 181 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1 x 1.3in, weight: 6.4oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard
- 3 AA batteries



Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle




Hands-free magnet in base



Hands-free magnet in pocket clip



Dual body switches



High-efficiency deep parabolic reflector



Wide-beam floodlight



Model	UPC 0 17398
NSP-2422B	80352 6
NSP-2422R	80353 3

# Multi-Purpose - Rechargeable

## Multi-Purpose Work Light Rechargeable

Spotlight



Floodlight



Dual-Light



This dual-switch rechargeable Multi-Purpose Work Light is one of the most versatile lights available. It is actually two lights in one...a spotlight and a floodlight. Rated at 200 lumens, the spotlight beam on this light puts a beam of light exactly where you need it. This unique work light also has a non-focused 170 lumens floodlight built into the handle. Because the floodlight does not have a reflector, the light spreads out in a wide even pattern of light expressly for the purpose of lighting up areas that are close by. Now you have two completely different patterns of light for whatever work needs to be done...a spotlight for locating the problem, and a floodlight for lighting up the area while the problem is being fixed. You can even turn both lights on at the same time for even more lighting options. The ergonomic shape of the handle makes it a pleasure to hold, and the flat-bottom design means it will stand up on virtually any flat surface. For additional hands-free options, the work light includes a Hook/Prop Stand. It can be used to hang the work light up, and because it can rotate 360 degrees around the body of the light, the light can be pointed to exactly where it's needed. Power comes from an integrated Nickel Metal Hydride battery.

**200** Spotlight  
Lumens

**170** Floodlight  
Lumens

**325** Dual-Light™  
Lumens

- 3 Hours run-time
- 170 Meter beam distance
- Integrated Nickel Metal Hydride (NiMH) battery



TECHNOLOGY

NSR-2492



NSR-2492B


# Multi-Purpose - Rechargeable

## FEATURES

- Three lighting modes: spotlight, floodlight & Dual-Light™ (both the spotlight & floodlight at the same time)
- Dual-switch design: top – spotlight, bottom - floodlight
- Engineered polymer housing
- Ergonomic shape to the handle makes it a pleasure to hold and use
- Flat bottom base make it possible to stand the light up for hands-free use
- The integrated hook/prop stand further increase the hands-free options
- Bright white LEDs with a 35,000 hour life
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: spotlight-200, floodlight-170, dual-light-325
- Run-time: spotlight-3 hrs, floodlight-2.5 hrs, dual-light-1.5 hrs
- Beam distance: 170 m
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 11.5 in, handle 1.7 in, bezel: 1.8 in, weight: 10.1 oz



## INCLUDED

- Worklight
- Integrated Nickel Metal Hydride battery
- Hook/Prop Stand
- AC power supply/charger
- 12 V DC power supply/charger



Integrated hook/prop stand



Push-button control



Flat bottom base



Ergonomic shape handle

Model	UPC 0 17398
NSR-2492	12492 8
NSR-2492B	80434 9

# Multi-Purpose - Rechargeable

## Multi-Purpose Work Lights Rechargeable

Spotlight



Floodlight



This rechargeable all LED Work Light has both a spotlight and a floodlight built in. The spotlight, located in the base of the handle, is rated at 32 Lumens. It's perfect for putting a narrow beam of light into a specific area. The floodlight, rated at 230 Lumens, is designed for lighting up a large area. The idea is simple, use the spotlight to find the problem, and the floodlight to light up the area when fixing the problem. The work light has two magnets built in...one at the balance point in the middle of the handle, and the other at the tip of the light. The flat-bottom design of the handle means the light will stand up on most flat surfaces, and the octagonal shape to the handle keeps the floodlight aimed in the correct direction when you lay the light on its side. Further adding to the work light's hands-free features is the detachable magnetic hook. It can be attached to either integrated body magnet and rotated 360 degrees. The integrated Nickel Metal Hydride battery can be recharged with the included AC or DC power supply/charger.

**32** Spotlight  
Lumens

**230** Floodlight  
Lumens

- 3 Hours run-time
- Dual Integrated Magnets & Hook
- Single Rocker Switch
- Powered by integrated Nickel Metal Hydride rechargeable battery



**NSR-2166R**

**NSR-2166B**

**SLR-2166**



# Multi-Purpose - Rechargeable

## FEATURES: ALL MODELS

- Light has 60 LEDs rated at 230 lumens arranged in a floodlight pattern and 6 LEDs in the base of the handle rated at 32 lumens serving as a spotlight
- Two built-in magnets, one at the tip of the light and the other at the mid-point of the body for hands-free use
- Magnetic hook can be attached to either of the built-in magnets and can be rotated 360 degrees for even more hands-free versatility
- Octagonal body design keeps the light in place when laid on its side
- Flat bottom design allows the light to stand up
- Water Resistant
- Impact & chemical resistant
- Integrated Nickel Metal Hydride (NiMH) battery
- Includes both AC & DC power supply/charger
- Limited 1 Year Warranty\*

## SPECIFICATIONS

- Lumens: floodlight 230, spotlight 32
- Run-time: floodlight 3 hrs, spotlight 18 hrs
- Recharge time: 8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 14.3in, head diameter: 1.4in, handle diameter: 1.8in, weight: 16oz

## INCLUDED

- Worklight with built-in dual magnets (body & tip)
- Integrated Nickel Metal Hydride battery
- Removeable hook
- AC power supply/charger
- 12 V DC power supply/charger



6 LED Spotlight




Magnet on top with removable hook



Magnet on body with removable hook



Using the floodlight

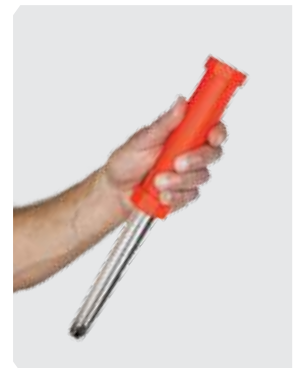

Using the spotlight

Model	UPC 0 17398
NSR-2166B	80362 5
NSR-2166R	80363 2
SLR-2166	80025 9

**XTREME  
LUMENS™**
**Multi-Purpose - Rechargeable**

## Multi-Purpose Work Lights Rechargeable

The Nightstick Xtreme Lumens™ Rechargeable Multi-Purpose LED Work Light is all about super-bright hands-free lighting. The floodlight has two brightness modes, high at 600 lumens and low at 225. The single push button body switch located on the handle controls all lighting modes. The NSR-2168 has three heavy-duty magnets built into the light, one at the tip one at the mid-point of the body and one built into the base for multiple hands-free uses. The flat-bottom design of the handle means the light will stand up on most flat surfaces, and the octagonal shape to the handle keeps the floodlight aimed in the correct direction when you lay the light on its side. Further adding to the work light's hands-free features is the detachable magnetic hook. It can be attached to either the body or tip magnets and can be rotated 360 degrees for even more hands-free versatility. The integrated Lithium-ion battery can be recharged with the included AC or DC power supply/charger.

 Floodlight  
High

 Floodlight  
Low

**600** Lumens  
High

**225** Lumens  
Low

- Xtreme Lumens™ design
- Dual-brightness Floodlight – 600/225 Lumens
- Three heavy-duty integrated magnets plus a detachable magnetic hook
- Single sealed push button switch
- Powered by integrated Lithium-ion rechargeable battery


**XTREME  
LUMENS™**
**NSR-2168R**
**NSR-2168B**



# Multi-Purpose - Rechargeable



## FEATURES: ALL MODELS

- Xtreme Lumens™ design
- Dual-brightness Floodlight – 600/225 Lumens
- Three heavy-duty integrated magnets, one at the tip of the light one at the mid-point of the body and one built into the base for multiple hands-free uses
- Magnetic hook can be attached to either the body or tip magnets and can be rotated 360 degrees for even more hands-free versatility
- Octagonal body design keeps the light in place when laid on its side
- Flat bottom design allows the light to stand up
- User-replaceable lens
- Water resistant
- Impact & chemical resistant
- Powered by integrated Lithium-ion battery
- Includes both AC & DC power supply/charger
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: high floodlight 600, low floodlight 225
- Run-time: high floodlight 4 hrs 30 min, low floodlight 12 hrs 30 min
- Recharge time: 6 hrs (typical)
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 14.6in, handle diameter: 2in x 2in, weight: 12.2oz

## INCLUDED


- Worklight with three heavy-duty integrated magnets
- AC & DC power supply/chargers
- Recharge time: 6 hrs
- Integrated Lithium-ion battery
- Detachable magnetic hook



20 LED floodlight



Magnet on top with removable hook

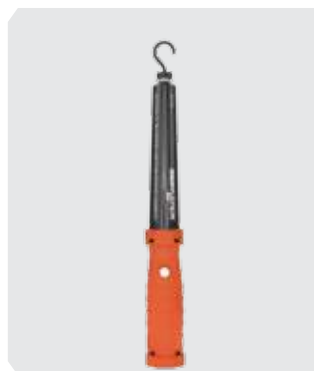

Magnet on body with removable hook



Magnet on bottom

Model	UPC 0 17398
NSR-2168B	80442 4
NSR-2168R	80443 1

## Multi-Purpose - Rechargeable

# Emergency Area Light / Under Hood Work Light Rechargeable

The SLR-2120 Emergency Area Light / Under Hood Work Light, is an all LED, hands-free floodlight. This rechargeable work light has an adjustable cradle with a pair of spring-loaded, foam-covered grippers that will extend 48"-77" to attach to a large variety of surfaces including the underside of most automobile hoods. The light bar can then be rotated 360 degrees to place the lighting exactly where it's needed. The 2120 has two brightness modes: Full-power (1200 Lumens) and Half-power (650 Lumens). The dual on/off buttons, one located on each of the two handles, operate in tandem with each other. One press of either button turns the light on in Full-power Mode, a second press and you're in Half-power Mode and then a third press, turns the light off. The light bar can easily be removed from the cradle. Each of the handles can independently rotate up or down through more than 200 degrees range of motion. The flat surface at the end of each handle can serve as a stand for the light bar. Additionally, there are 3 flush-mounted magnets located in the end of each handle. This allows one or both ends of the light bar to be attached to virtually any flat metal surface. Each handle also has an integrated recessed hook that can swivel 360 degrees making it possible to hang the light bar up. The included AC & DC Power Supplies/Chargers can be used to power the 2120 during use and/or as a way to recharge the unit when it's not in use. Requiring only 6 hours to charge the SLR-2120 will run for 4.5 hours in Full-power Mode, and 8.5 hours when operating in Half-power Mode.

# 1200 Lumens

- **Two brightness modes - full-power & half-power**
- **Dual spring-loaded grippers with 48"-77" capacity built into the cradle**
- **Light bar can be rotated 360 degrees in the cradle or removed all together**
- **Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality**
- **Integrated rechargeable Lithium-ion battery - no recharge memory effect**


**SLR-2120**


# Multi-Purpose - Rechargeable

## FEATURES

- All LED construction
- Two brightness modes - full-power & half-power
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality
- Light bar handles rotate up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Lithium-ion battery - no recharge memory effect
- Includes AC & DC power supplies/chargers
- Limited 1 Year Warranty \*

## SPECIFICATIONS

- Lumens: high-brightness: 1200, low-brightness: 650
- Run-time: high-brightness-4.5 hrs, low-brightness-8.5 hrs
- Recharge time: 6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 48.5 in, Width: 4.4 in, Depth: 6.5 in, Weight: 5.5 lbs

## INCLUDED

- Worklight
- Light bar cradle
- AC & DC power supplies/charger



Each handle can independently rotate up or down



Three magnets on each end with spring-loaded gripper



Dual on/off buttons operate in tandem on each handle



Recharges in 6 hours

Model	UPC 0 17398
SLR-2120	80172 0

## Multi-Purpose - Rechargeable

### Emergency Area Light Rechargeable

The NSR-2124 Emergency Area Light, is an all LED, hands-free floodlight. This rechargeable work light has an adjustable cradle with a pair of spring-loaded, foam-covered grippers that will extend 48"-77" to attach to a large variety of surfaces and can be rotated 360 degrees. The 2124 has dual on/off buttons, one located on each of the two handles. One press of either button turns on a 650 lumen floodlight, a second press activates an alternating red and blue floodlight and then a third press, turns the light off. The light bar can easily be removed from the cradle and the rotating magnetic handles can be attached to virtually any metal surface. The handle also has an integrated recessed hook that can swivel 360 degrees making it possible to hang the light bar up. Both AC & DC Power Supplies/Chargers are included and can be used to power the 2124 during use.

# 650 Lumens

**NSR-2124**

- **Two brightness modes - white floodlight & alternating red/blue strobe**
- **Dual spring-loaded grippers with 48"-77" capacity built into the cradle**
- **Light bar can be rotated 360 degrees in the cradle or removed all together**
- **Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality**
- **Integrated rechargeable Lithium-ion battery**



# Multi-Purpose - Rechargeable

## FEATURES

- All LED construction
- Two brightness modes - white floodlight & alternating red/blue strobe
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality
- Light bar handles rotate up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Lithium-ion battery
- Includes AC & DC power supplies/chargers
- Limited 1 Year Warranty \*

## SPECIFICATIONS

- Floodlight: 650 lumens
- Run-time: 8.5 hrs
- Recharge time: 6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 48.5 in, Width: 4.4 in, Depth: 6.5 in, Weight: 5.5 lbs

## INCLUDED

- Worklight
- Light bar cradle
- AC & DC power supplies/charger



Each handle can independently rotate up or down



Three magnets on each end with spring-loaded gripper



Dual on/off buttons operate in tandem on each handle



Recharges in 6 hours

Model	UPC 0 17398
NSR-2124	80525 4

## Multi-Purpose - Polymer

# Dual-Light™ Flashlight w/ Dual Magnets Rechargeable

Flashlight



Floodlight



Dual-Light



The rechargeable Dual-Light™ Flashlight w/ Dual Magnets use a CREE® LED rated at 250 lumens paired with a high-efficiency deep parabolic reflector, creating a flashlight beam with an effective range of 213 meters. Additionally, built into the handle is a 140 lumen floodlight. Unlike the flashlight beam, the light coming out of the floodlight does not have a reflector so the light spreads out in a wide, even, unfocused pattern of light...perfect for lighting up things that are close. The waterproof design, in combination with an impact and chemical resistant engineered polymer housing, make this tough light, one of the best values around. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage.

The flashlight is actuated by means of the top body switch providing both momentary and constant-on functionality. The floodlight is operated using the bottom button. Additionally, both lights can be turned on at the same time for even more versatile lighting options. Now you have a light for distance and one for close up work. Power comes from a pair of integrated Lithium-ion rechargeable batteries.



**250** Flashlight  
Lumens

**140** Floodlight  
Lumens

**350** Dual-Light™  
Lumens

- 9.5 hours run-time
- Dual Integrated hands-free magnets
- Beam distance rated at 213 meters
- Powered by 2 integrated Lithium-ion rechargeable batteries



TECHNOLOGY

NSR-2522RM


# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- High-efficiency deep parabolic reflector
- Effective beam distance of 213 meters
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight on at the same time) for maximum versatility & user safety
- Powerful integrated magnets built into the base and pocket clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes wall/vehicle mountable charger, AC/DC power supplies & removable lanyard
- Powered by two integrated Lithium-ion rechargeable batteries
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-250, floodlight-140, dual-light-350
- Run-time: flashlight-12 hrs, floodlight-12 hrs, dual-light-6 hrs
- Beam distance: 213 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1 x 1.3in, weight: 6.4oz



## INCLUDED

- Light
- Wall/vehicle mountable charger
- AC & DC power supplies
- Two integrated Lithium-ion batteries
- Removable wrist lanyard



Model	UPC 0 17398
NSP-2522RM	80486 8




Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle




Charger



Hands-free magnet in pocket clip



Dual body switches




High-efficiency deep parabolic reflector



Wide-beam floodlight

# Headlamps

## Dual-Light™ Headlamps



These Dual-Light™ headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted switch provides user selectable spotlight/floodlight/dual-light operation. Power comes from 3 AAA premium batteries (included).

NSP-4602B

**35 Lumens**  
**Dual-Light™**  
**30 Lumens**  
Spotlight  
**15 Lumens**  
Floodlight



NSP-4602B

NSP-4604B

**90 Lumens**  
**Dual-Light™**  
**100 Lumens**  
Spotlight  
**45 Lumens**  
Floodlight



NSP-4604B

NSP-4606B

**150 Lumens**  
**Dual-Light™**  
**140 Lumens**  
Spotlight  
**50 Lumens**  
Floodlight



NSP-4606B

- Single switch control
- Engineered polymer housing
- Powered by 3 AAA batteries (included)





# Headlamps

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – floodlight – Dual-Light™
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (spotlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- 1 Year Limited Warranty\*

## INCLUDED

- Headlamp
- 3 premium alkaline AAA batteries
- Non-slip elastic head strap



## NSP-4602B SPECIFICATIONS

- Lumens: spotlight-9, floodlight- 30, dual-light-30
- Run-time: spotlight-40 hrs, floodlight-11 hrs, dual-light-16 hrs
- Beam distance: 18 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.7oz

FL 1 STANDARD		
9 LUMENS	40h	18m
84cd	2m	1m

## NSP-4604B SPECIFICATIONS

- Lumens: spotlight-55, floodlight-40, dual-light-80
- Run-time: spotlight-6 hrs, floodlight-8 hrs, dual-light-5 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.7oz

FL 1 STANDARD		
55 LUMENS	6h	50m
650cd	2m	1m

## NSP-4606B SPECIFICATIONS

- Lumens: spotlight-140, floodlight-50, dual-light-150
- Run-time: spotlight-3.5 hrs, floodlight-8.5 hrs, dual-light-4 hrs
- Beam distance: 116 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.5oz

FL 1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	150 LUMENS	140 LUMENS
	4h15min	3h30min
	116m	116m
	3442cd	3442cd
	2m	1m

Model	UPC 0 17398
NSP-4602B	80186 7
NSP-4604B	80187 4
NSP-4606B	80522 3

## Headlamps

### Multi-Function Headlamps

These Multi-Function Headlamps feature a multi-position tilt head design and have a tight-beam long-throw spotlight designed for distance illumination. These products feature a single top mounted switch that activates both a high-brightness spotlight and a low-brightness spotlight. Power comes from 3 AAA batteries (included).

Spot High



Spot Low



NSP-4603B

# 120/70 Lumens Spotlight



NSP-4603B

NSP-4605B

# 150/80 Lumens Spotlight



NSP-4605B

- High/low-brightness spotlight
- Engineered polymer housing
- IP-X7 rated waterproof
- Adjustable elastic headband with rubberized strips
- Powered by 3 AAA batteries (included)




# Headlamps

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- IP-X7 rated waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- 1 Year Limited Warranty\*

## NSP-4603B SPECIFICATIONS

- Lumens: high spotlight-120, low spotlight-70
- Run-time: high spotlight-5.5 hrs, low spotlight-14 hrs
- Beam distance: 144 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.5oz

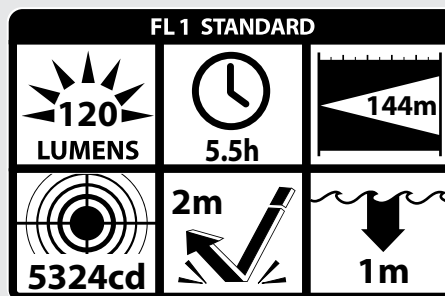

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap




Model	UPC 0 17398
NSP-4603B	80520 9
NSP-4605B	80521 6



## NSP-4605B SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-80
- Run-time: high spotlight-4 hrs, low spotlight-7.5 hrs
- Beam distance: 175 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.5in, height: 2.2in, depth: 2in, weight: 3.7oz

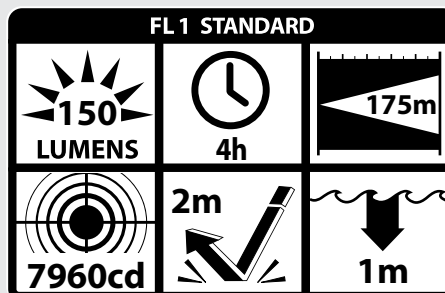

# Headlamps

## Multi-Function Headlamps

NSP-4608B

**115 Lumens**  
**Dual-Light™**

**100/60 Lumens**  
**Spotlight**

**90/50 Lumens**  
**Floodlight**

Spot High Spot Low Flood High



Flood Low Dual



These multi-function headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted dual switches provide high/low-brightness spotlight and high/low-brightness floodlight (4608), and high/low-brightness spotlight and white/red/green floodlight (4610) operation. Additionally, the spotlight & white floodlight settings on the 4608 can be selected simultaneously for even greater functionality. Power comes from 3 AAA premium batteries (included).

NSP-4610B

**150/80 Lumens**  
**Spotlight**

**100 Lumens**  
**White Floodlight**

**9 Lumens**  
**Red Floodlight**

**18 Lumens**  
**Green Floodlight**

Spot High Spot Low White Flood



Red Flood Green Flood



NSP-4608B



TECHNOLOGY




NSP-4610B

- Beam distance rated at 77/60 meters
- Dual-brightness spotlight and multiple brightness/color floodlight modes
- Engineered polymer housing
- Powered by 3 AAA batteries (included)



# Headlamps

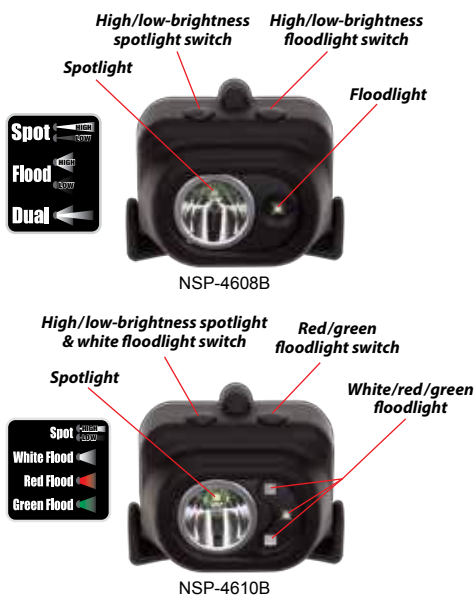

## NSP-4608B SPECIFICATIONS

- Lumens: high spotlight-100, low spotlight-60, high floodlight-90, low floodlight-50, Dual-Light-115
- Run-time: high spotlight-5 hrs, low spotlight-13.5 hrs, high floodlight-4.25 hrs, low floodlight-13.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 77 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™ (4608)
- High/low-brightness spotlight – white/red/green floodlight (4610)
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Colored floodlight for night vision preservation (4610)
- Dual-Light (spotlight & white floodlight mode at same time, 4608) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

FL 1 STANDARD	DUAL-LIGHT	HIGH	LOW
	180 LUMENS	100 LUMENS	60 LUMENS
	2h 30min	5h	13h
	77m	77m	55m
	1506cd	1506cd	775cd
	2m		
	1m		

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap



Model	UPC 0 17398
NSP-4608B	80236 9
NSP-4610B	80237 6



## NSP-4610B SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-80, white floodlight-100, red floodlight-9, green floodlight-18,
- Run-time: high spotlight-4 hrs, low spotlight-8 hrs, white floodlight-4 hrs, red floodlight-25 hrs, green floodlight-22.5 hrs
- Beam distance: 60 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL 1 STANDARD	HIGH	LOW
	150 LUMENS	80 LUMENS
	4h	8h
	60m	43m
	1377cd	667cd
	2m	
	1m	



## Headlamps

# Dual-Light™ Multi-Function Headlamp w/ Hard Hat Clip

**115 Lumens**  
Dual-Light

**100/60 Lumens**  
Spotlight

**90/50 Lumens**  
Floodlight




This non-rechargeable Dual-Light™ Multi-function Headlamp w/ Hard Hat Clip features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. Utilizing Bayco's exclusive Dual-Light design, this headlamp combines a tight-beam long-throw spotlight, with a wide-beam close area floodlight. Rated at 100 & 60 lumens respectively, the high and low-brightness spotlight beams on this headlamp are designed for distance illumination. This headlamp also has two wide-beam floodlight settings rated at 90 & 50 lumens. The floodlight spreads out in a wide even pattern of light expressly for the purpose of providing illumination of areas that are close by. Additionally any combination of spotlight & floodlight settings can be selected simultaneously for even greater functionality. The top mounted dual switches provide high/low-brightness spotlight and high/low-brightness floodlight.

- **5 lighting modes: high/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™**
- **Integrated Stainless Steel Clip for attachment to hard hat mounting brackets**
- **IP-X7 rated waterproof**
- **Powered by 3 AAA batteries (included)**



**NSP-4608BC**

# Headlamps

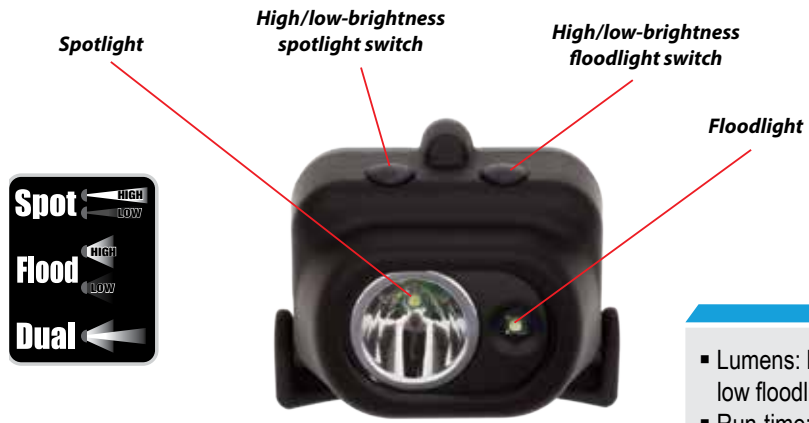

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™
- Integrated Stainless Steel Clip for use with most hard hat mounting brackets
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (any spotlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: high spotlight-100, low spotlight-60, high floodlight-90, low floodlight-50, Dual-Light-115
- Run-time: high spotlight-5 hrs, low spotlight-13.5 hrs, high floodlight-4.25 hrs, low floodlight-13.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 77 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Length: 2.1in, width: 2.6in, depth: 1.8in, weight: 3.4oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	LOW
	<b>180</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>2h 30min</b>	<b>5h</b>	<b>13h</b>
	<b>77m</b>	<b>77m</b>	<b>55m</b>
	<b>1506cd</b>	<b>1506cd</b>	<b>775cd</b>

## INCLUDED

- Headlamp w/ Hard Hat Clip
- 3 – AAA Batteries

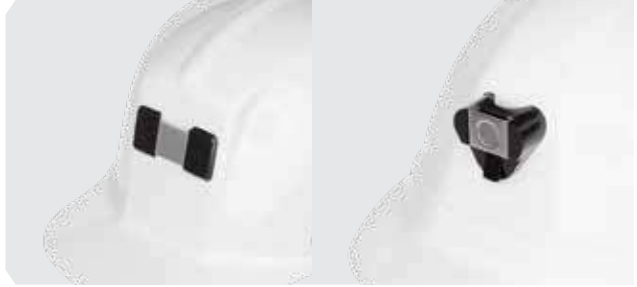

Fits most hard hat mounting brackets



Integrated stainless steel clip



Tool-less secure pressure fit mounting

<b>Model</b>	<b>UPC 0 17398</b>
NSP-4608BC	80487 5

# Headlamps

## Dual-Light™ Multi-Function Headlamp


This headlamp is the ideal hands-free lighting tool when working in a location where maximum lighting options and maximum run-times are a requirement. The top mounted dual switches provide white spotlight, high & low-brightness white floodlight, red floodlight and Dual-Light™ control. With the battery compartment located in the back, optimal balance is achieved whether the light is worn directly on the head or on a hard hat. The light includes two straps...the heavy-duty rubber head strap for use on a hard hat and the non-slip elastic head strap for use on a ball cap or directly on the user's head. Power is supplied from 3 included AA batteries.

**175** Lumens  
Dual-Light™

**100** Lumens  
Spotlight

**90/20** Lumens  
White Floodlight

**18** Lumens  
Red Floodlight




- Beam distance rated at 140 meters
- Spotlight, dual brightness white/red floodlight modes
- Engineered polymer housing
- Powered by 3 AA Premium batteries (included)

**NSP-4612B**



# Headlamps

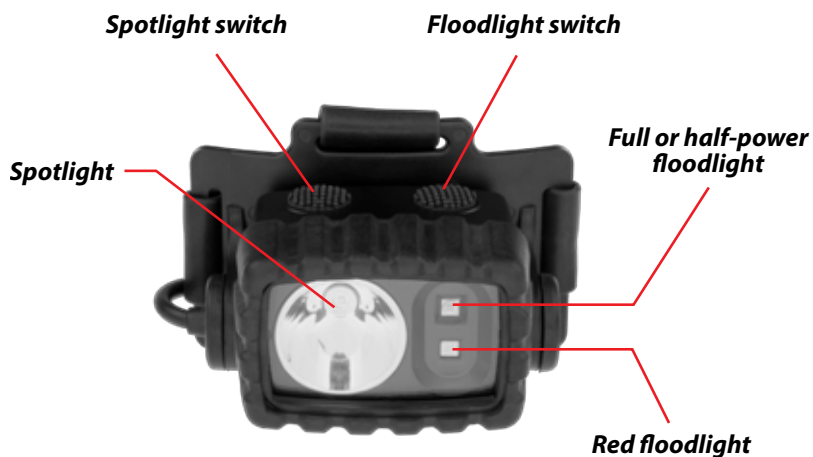

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight - high/low-brightness white floodlight - red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight for night vision preservation
- Dual-Light™ (spotlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: spotlight-100, high floodlight-90, low floodlight-20, red floodlight-18, Dual-Light-175
- Run-time: spotlight-18 hrs, high floodlight-13.5 hrs, low floodlight-75 hrs, red floodlight-37 hrs, Dual-Light-3.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	175 LUMENS	100 LUMENS
	6h 30min	18h
	154m	140m
	5291cd	4820cd
	2m	
	1m	

Model	UPC 0 17398
NSP-4612B	80351 9



Heavy-duty rubber head strap

## INCLUDED

- Headlamp
- 3 Premium alkaline AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap



## Headlamps


# Low-Profile LED Multi-Function Dual-Light™ Headlamp

**300 Lumens**  
**Dual-Light™**


**150/75 Lumens**  
 Spotlight

**150/75 Lumens**  
 Floodlight


Spot High



Spot Low



Flood High



Flood Low



Dual



- Low profile design
- Glass-filled nylon polymer housing
- 5 lighting modes: high/low-brightness white spotlight & high/low-brightness white floodlight and Dual-Light
- Dual button design
- IP-X7 rated waterproof
- Powered by 3 AAA batteries (included)

The Nightstick NSP-4614B Low-Profile Multi-Function Dual-Light™ Headlamp is designed specifically to work on hard hats that have a flip-up face shield. The unique low-profile shape allows the user to work without having to remove the headlamp when raising or lowering their face shield. The NSP-4614B is manufactured from glass-filled nylon polymer and features a multi-position tilt head design. Both the spotlight and the floodlight use CREE® LED's and an advanced (TIR) Total Internal Reflection set of lenses designed to optimize lumen output and beam pattern. The spotlight and the floodlight are both rated at 150 Lumens in high mode and 75 Lumens in low mode. Front mounted dual switches provide easy access to the spotlight for distance illumination, the floodlight for close-up illumination, and Dual-Light for maximum lighting, versatility and user safety. The NSP-4614B includes a heavy-duty rubber head strap for use on a hard hat, as well as, a non-slip elastic head strap for use on a ball cap or directly on the user's head. Power is supplied from 3 AAA batteries (included).




TECHNOLOGY



NSP-4614B

# Headlamps



## SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-75, high floodlight-150, low floodlight-75, Dual-Light-300
- Run-time: high spotlight-3 hrs, low spotlight-6 hrs, high floodlight-3 hrs, low floodlight-6 hrs, Dual-Light-1.5 hrs
- Beam distance: 76/55 meters
- Water rating: IP-X7
- Drop rating: 1 meter
- Length: 3.54in, width: 1.58in, height: 1.875in, weight: 5.8oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	LOW
	300 LUMENS	150 LUMENS	75 LUMENS
	1h 30min	3h	6h
	120m	113m	83m
	3599cd	3229cd	1722cd
	2m		1m

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Focused high/low-brightness spotlight beam for distance illumination
- Unfocused high/low-brightness wide-beam floodlight for close-up illumination
- Dual-Light™ (spotlight and floodlight on at the same time) for maximum versatility
- Glass-filled nylon polymer housing
- (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern
- Dual switches located on front of light
- Adjustable tilt head
- Heavy-duty rubber strap for hard hat applications
- Non-slip elastic head strap
- IP-X7 waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*

## INCLUDED

- Headlamp
- 3 AAA batteries
- Heavy-duty rubber head strap
- Elastic non-slip head strap



Adjustable tilt head



Dual switches located on front of light



Heavy-duty rubber head strap



3 AAA batteries included

Model	UPC 0 17398
NSP-4614B	80505 6

## Headlamps

# Low-Profile Dual-Light™ Headlamp

**450 Lumens**  
Dual-Light™

**250/125 Lumens**  
Spotlight

**250/125 Lumens**  
Floodlight

Spot High Spot Low



Flood High Flood Low Dual



- Low profile design
- Glass-filled nylon polymer housing
- 5 lighting modes: high/low-brightness white spotlight & high/low-brightness white floodlight and Dual-Light
- IP-X7 rated waterproof
- Powered by 3 AA batteries (included)

The Nightstick NSP-4616B Low-Profile Dual-Light™ Headlamp is designed specifically to work on fire helmets and hard-hats that have a flip-up face shield. The unique low-profile shape allows the user to work without having to remove the headlamp when raising or lowering their face shield. The NSP-4616B is manufactured from glass-filled nylon polymer and features a multi-position tilt head design. Both the spotlight and the floodlight use CREE® LED's and an advanced (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern. The spotlight and the floodlight are both rated at 250 lumens in high mode and 125 lumens in low mode. Front mounted dual switches provide easy access to the spotlight for distance illumination, the floodlight for close-up illumination, and Dual-Light for maximum lighting, versatility and user safety. The NSP-4616B includes a heavy-duty rubber head strap for use on a fire helmet or hard-hat, and is powered by 3 AA batteries (included).



TECHNOLOGY

NSP-4616B






# Headlamps

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Focused high/low-brightness spotlight beam for distance illumination
- Unfocused high/low-brightness wide-beam floodlight for close-up illumination
- Dual-Light™ (spotlight and floodlight on at the same time) for maximum versatility
- Glass-filled nylon polymer housing
- (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern
- Dual switches located on front of light
- Adjustable tilt head
- Battery pack located in the rear of the strap
- Amber colored rear facing led
- Heavy-duty rubber strap for hard hat applications
- IP-X7 waterproof
- Impact & chemical resistant
- Powered by 3 AA batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens:
  - high spotlight-250, low spotlight-125, high floodlight-250, low floodlight-125, Dual-Light-450
- Run-time:
  - high spotlight-6.5 hrs, low spotlight-10.5 hrs, high floodlight-6.5 hrs, low floodlight-10.5 hrs, Dual-Light-3.5 hrs
- Beam distance: 87/78 meters
- Water rating: IP-X7
- Drop rating: 1 meter
- Length: 1.25in, width: 3.75in, depth: 1in, weight: 9.3oz

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	450 LUMENS	250 LUMENS	125 LUMENS
	3h 30min	6h 30min	10h
	87m	78m	38m
	1870cd	1500cd	370cd
	2m 1m		

## INCLUDED

- Headlamp
- 3 AA batteries
- Heavy-duty rubber head strap



Low-profile to clear hard-hat visors



Heavy-duty rubber strap



Rear-facing amber led



Adjustable tilt head



Low-profile to clear the face shield on fire helmets

Model    UPC 0 17398

NSP-4616B    80523 0

XPP 5410

**NIGHTSTICK**  
Tough, Durable, Affordable™

## Intrinsically Safe Permissible

### Polymer Penlight



*This penlight is cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included).*

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



**30** Lumens

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Engineered polymer housing
- Powered by AAA batteries

**XPP-5410G**




# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 2 AAA batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 30
- Run-time: 18 hrs
- Beam distance: 40 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.8in, head diameter: 0.9in, handle diameter: 0.7in, weight: 1.9oz




## INCLUDED

- Flashlight
- 2 AAA batteries

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible.

Patent 7,738,229



XPP-5410G



High-efficiency deep parabolic reflector



Push-button tail-cap switch

Permissible XPP-5410 Flashlight Assembly

**MSHA** APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.

	ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE		0359	
<b>Intertek</b>	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 Ex ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga		Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27839X IECEx ITS 14.0036X	
	⊕ I M 1 Ex ia op is I Ma ⊕ II 1 G Ex ia op is IIC T3 Ga		-20°C ≤ Tamb ≤ +40°C 1.5V/Cell AAA Alkaline	

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5410G	80298 7

XPP 5412

**NIGHT STICK**  
Tough, Durable, Affordable™

**Intrinsically Safe**

## Polymer Penlight



*This penlight is cETLus, ATEX and IECEx listed Intrinsically Safe. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).*

**INTRINSICALLY SAFE**

Flashlight



**50** Lumens

- cETLus, ATEX and IECEx listed Intrinsically Safe
- Engineered polymer housing
- Powered by AAAA batteries

**XPP-5412G**






# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 3 AAAA batteries (included)
- Limited Lifetime Warranty\*



XPP-5412G




High-efficiency deep parabolic reflector



Push-button tail-cap switch

## SPECIFICATIONS

- Lumens: 50
- Run-time: 13.75 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.8in, head diameter: 0.6in, handle diameter: 0.5in, weight: 1.5oz



## INCLUDED

- Flashlight
- 3 AAAA batteries

## SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe.

Patent 7,738,229

### Nightstick 5412 Penlight



ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma  
CLASS II & III DIV1 GRPS E-G T135C Ex ia op is IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27839X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 14.0036X  
© I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C  
© II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AAAA Alkaline



**Conforms to:**

ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**

CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

Model UPC 0 17398

XPP-5412G 80299 4

# Intrinsically Safe Permissible

## Polymer Flashlights



These non-rechargeable flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**



Flashlight



**140 Lumens**

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 180 meters
- Engineered polymer housing



**XPP-5420G**



**XPP-5420B**

# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*



Built in pocket/belt clip




Single body switch



High-efficiency deep parabolic reflector

## SPECIFICATIONS

- Lumens: 140
- Run-time: 14 hrs
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 7.3oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Permissible Nightstick 5420 Flashlight

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

**ETL** US ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE

**CE** 0359

**Segurança** INMETRO

**Intertek** CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
CLASS II & III DIV 1 GRPS E-G T13C Ex ia IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27837X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0026X  
Ⓜ I M 1 Ex ia I Ma -20°C ≤ Tamb ≤ +40°C  
Ⓜ I 1 G Ex ia IIC T3 Ga 1.5V/Cell AA Alkaline

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5420G	80091 4
XPP-5420B	80092 1

# Intrinsically Safe Permissible

## Polymer Dual-Light™ Flashlights



These non-rechargeable Dual-Light™ flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**120** Flashlight  
Lumens

**120** Floodlight  
Lumens

**240** Dual-Light™  
Lumens

- cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible
- Flashlight / Floodlight / Dual-Light™
- Beam distance rated at 170 meters
- Engineered polymer housing



**XPP-5422B**

**XPP-5422G**


# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Built in pocket/belt clip

Dual body switches

High-efficiency deep parabolic reflector

Wide-beam floodlight



Permissible Nightstick 5422 Flashlight/Floodlight  
 APPROVAL No. 20-A130001-0  
 TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY  
 WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.

	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE		0359	
	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia I Ma Ⓜ II 1 G Ex ia IIC T3 Ga		Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422G	80093 8
XPP-5422B	80094 5

**Intrinsically Safe Permissible**

**Polymer Dual-Light™ Flashlight w/ Dual Magnets**



This non-rechargeable Dual-Light™ flashlight with dual magnets is cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



Floodlight



Dual-Light



**XPP-5422GM**

**120** Flashlight Lumens  
**120** Floodlight Lumens  
**240** Dual-Light™ Lumens

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible
- Flashlight / Floodlight / Dual-Light™
- Two Integrated hands-free magnets
- Beam distance rated at 170 meters




# Intrinsically Safe Permissible

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility and user safety
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.2in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible

Patent 7,738,229



Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle



High-efficiency deep parabolic reflector



Wide-beam floodlight



Hands-free magnet in base



Hands-free magnet in pocket clip

Permissible Nightstick 5422 Flashlight/Floodlight			
<b>MSHA</b>	APPROVAL No. 20-A130001-0		
TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY			
WARNINGS: MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only. The Model Nightstick 5422 must not be opened in areas where permissibility is required.			
<b>ETL</b>	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	<b>CE</b> 0359	<b>Seguranca</b> NCC 15.0282 X
<b>Intertek</b>	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia I Ma Ⓢ II 1 G Ex ia IIC T3 Ga	Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26		<b>Certified to:</b> CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25	

Model	UPC 0 17398
XPP-5422GM	80448 6

# Intrinsically Safe

## Dual-Function Headlamps



These non-rechargeable dual-function headlamps are cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe. The headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA premium batteries (included).

**INTRINSICALLY SAFE**



XPP-5450G

**60/40 Lumens Spotlight**

Spot High Spot Low



XPP-5452G

**115/65 Lumens Spotlight**

Spot High Spot Low



**XPP-5450G**

**XPP-5452G**

- cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe
- High/low-brightness spotlight
- 80/92 Meter beam distance
- Engineered polymer housing





# Intrinsically Safe

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, INMETRO (5450G) and IECEx listed Intrinsically Safe Patent 7,738,229

High/Low-brightness spotlight switch

Spotlight



## XPP-5450G SPECIFICATIONS

- Lumens: high spotlight-60, low spotlight-40
- Run-time: high spotlight-13.5 hrs, low spotlight-22.75 hrs
- Beam distance: 80 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

FL 1 STANDARD	HIGH	LOW
	60 LUMENS	40 LUMENS
	13h	22h
	80m	65m
	1615cd	1076cd
	2m	1m



## XPP-5452G SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-65
- Run-time: high spotlight-4.5 hrs, low spotlight-13 hrs
- Beam distance: 92 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

FL 1 STANDARD	HIGH	LOW
	115 LUMENS	65 LUMENS
	4h 30min	13h
	92m	67m
	2152cd	1141cd
	2m	1m



## INCLUDED

- Headlamp
- 3 AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Nightstick 5450 Headlamp**

ETL US ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE

Intertek

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ©II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

Model	UPC 0 17398
XPP-5450G	80300 7
XPP-5452G	80301 4

**Nightstick 5452 Headlamp**

ETL US ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE

Intertek

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ©II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

**Intrinsically Safe**

**Multi-Function Dual-Light™ Headlamp**



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**

**160 Lumens**  
**Dual-Light™**

**115/60 Lumens**  
**Spotlight**


**120/60 Lumens**  
**Floodlight**



TECHNOLOGY




**XPP-5454G**



- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe
- 82 Meter beam distance
- Dual brightness spotlight & floodlight plus Dual-Light™
- Engineered polymer housing



# Intrinsically Safe

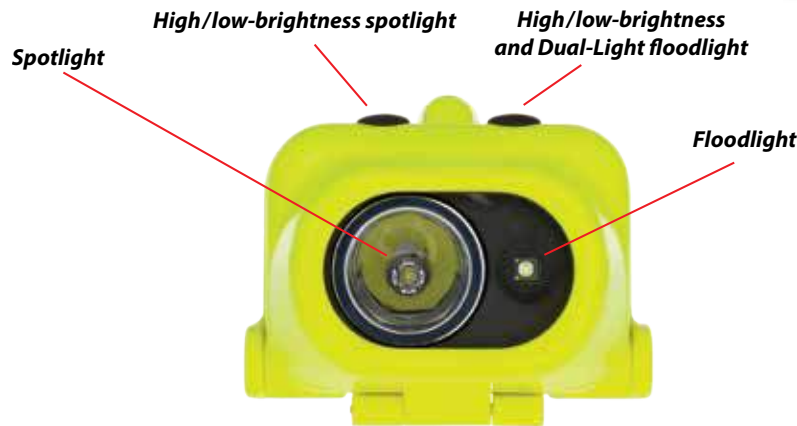

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Focused spotlight beam for distance illumination
- Wide unfocused floodlight beam for close-up illumination
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING






cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe  
 Patent 7,738,229

Nightstick 5454 Headlamp	
 ID 4008947 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 INMETRO
Intertek CLASS I DIV 1 GRPS A-D T3 CLASS II & III GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga © II 1 G Ex ia IIC T3 Ga CE 0359	Ex ia IIC T3 Ga Intertek ITS 13 ATEX27928X IECEx ETL 13.0045X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AAA Alkaline
Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	Certified to: CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5454G	80427 1

## SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	<b>160</b> LUMENS	<b>115</b> LUMENS	<b>60</b> LUMENS
	<b>3h 30min</b>	<b>5h</b>	<b>16h</b>
	<b>94m</b>	<b>82m</b>	<b>60m</b>
	<b>1711cd</b>	<b>1668cd</b>	<b>882cd</b>
	<b>2m</b> <b>1m</b>		

## INCLUDED

- Headlamp
- 3 AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Intrinsically Safe**

**Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip**




This non-rechargeable multi-function Dual-Light™ headlamp w/ Hard Hat Clip is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**

**160 Lumens**  
**Dual-Light™**

**115/60 Lumens**  
**Spotlight**

**120/60 Lumens**  
**Floodlight**




TECHNOLOGY

- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe
- 5 lighting modes: high/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Integrated Stainless Steel Clip for attachment to hard hat mounting brackets

**XPP-5454GC**



# Intrinsically Safe

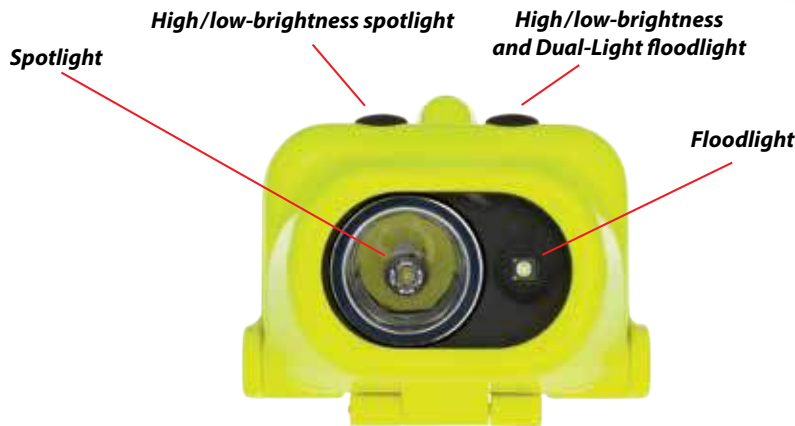

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Integrated Stainless Steel Clip for use with most hard hat mounting brackets
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (any spotlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe  
 Patent 7,738,229

## SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, length: 2.1in, depth: 1.8in, weight: 3.4oz

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	<b>160</b> LUMENS	<b>115</b> LUMENS	<b>60</b> LUMENS
	<b>3h 30min</b>	<b>5h</b>	<b>16h</b>
	<b>94m</b>	<b>82m</b>	<b>60m</b>
	<b>1711cd</b>	<b>1668cd</b>	<b>882cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Headlamp w/ Hard Hat Clip
- 3 AAA batteries

Nightstick 5454 Headlamp

ID 4008947  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

Intertek  
 CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27928X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0045X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ©II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

Conforms to:  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5454GC	80450 9

**Intrinsically Safe Permissible**

**Multi-Function Dual-Light™ Headlamp**



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a red colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE  
PERMISSIBLE**

**175 Lumens**  
**Dual-Light™**

**100 Lumens**  
**Spotlight**

**90/20 Lumens**  
**White Floodlight**

**18 Lumens**  
**Red Floodlight**



**XPP-5456G**

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 140 meters
- Spotlight, dual brightness white/red floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)



# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible  
 Patent 7,738,229

Permissible Nightstick XPP-5456G Headlamp

**MSHA** APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5456G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5456G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approve as a cap lamp under 30CFR, Part 19.

**Intertek**  
 ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

**CE** 0359

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga Intertek ITS 13 ATEX27838X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0025X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

Model	UPC 0 17398
XPP-5456G	80156 0



## SPECIFICATIONS

- Lumens: spotlight-100, high white floodlight-90, low white floodlight-20, red floodlight-18, Dual-Light-175
- Run-time: spotlight-18 hrs, high white floodlight-13.5 hrs, low white floodlight-75 hrs, red floodlight-37 hrs, Dual-Light-6.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL 1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	175 LUMENS	100 LUMENS
	6h 30min	18h
	154m	140m
	5291cd	4820cd

## INCLUDED

- Headlamp
- 3 AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Headlamp



This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a green colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE  
PERMISSIBLE**

**190 Lumens**  
**Dual-Light™**

**130 Lumens**  
**Spotlight**

**100/25 Lumens**  
**Floodlight**

**21 Lumens**  
**Green Floodlight**



- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 120 meters
- Spotlight, dual brightness white/green floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)

**XPP-5458G**





# Intrinsically Safe Permissible

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – green floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Green colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible  
 Patent 7,738,229



## SPECIFICATIONS

- Lumens: spotlight-130, high white floodlight-100, low white floodlight-25, green floodlight-21, Dual-Light-190
- Run-time: spotlight-14 hrs, high white floodlight-12.5 hrs, low white floodlight-70 hrs, green floodlight-37 hrs, Dual-Light-6 hrs
- Beam distance: 120 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL 1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	<b>190</b> LUMENS	<b>130</b> LUMENS
	<b>6h</b>	<b>14h</b>
	<b>132m</b>	<b>120m</b>
	<b>3500cd</b>	<b>3500cd</b>
	<b>2m</b>	
	<b>1m</b>	

## INCLUDED

- Headlamp
- 3 AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

Permissible Nightstick XPP-5458G Headlamp  
 APPROVAL No. 20-A130002-0

**MSHA**

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5458G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5458G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approve as a cap lamp under 30CFR, Part 19.

**Intertek**  
 ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T13C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27838X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0025X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**CE** 0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

Model	UPC 0 17398
XPP-5458G	80158 4

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light



This XPP-5570G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Non-Rechargeable Batteries is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570G has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570G utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570G can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.



**INTRINSICALLY SAFE  
PERMISSIBLE**

**200** Flashlight Lumens

**200** Floodlight Lumens

**200** Dual-Light™ Lumens



**XPP-5570G**

- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Beam distance rated at 267 meters
- Meets the requirements for NFPA-1971-8.6 (2013)

# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight




Heavy-duty stainless-steel pocket clip

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-21 hrs, medium-42 hrs, low-84 hrs, floodlight high-21 hrs, medium-42 hrs, survival-84 hrs, dual-light-21 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 16.9 oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>200</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>21h</b>	<b>21h</b>	<b>42h</b>	<b>84h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>



## INCLUDED

- Light
- AA Battery Carrier
- 6 AA batteries



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

Model	UPC 0 17398
XPP-5570G	80455 4

Permissible Nightstick XPP-5570 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex is FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**cULus**  
LISTED  
E 467750  
CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light Rechargeable



This Rechargeable XPR-5572G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572G has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572G utilizes Nightstick's exclusive Dual-Light mode...the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.



**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight Lumens  
**200** Floodlight Lumens  
**200** Dual-Light™ Lumens



XPR-5572G



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position

# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip




Wall or vehicle mounted charger

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 13.7oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>200</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>8h</b>	<b>6h</b>	<b>11h</b>	<b>22h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>



## INCLUDED

- Light
- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

Model	UPC 0 17398
XPR-5572G	80457 8

Permissible Nightstick XPR-5572 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex is FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**cULus**  
LISTED  
E 467750  
CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light

This XPP-5570R Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Non-Rechargeable Batteries is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570R has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570R utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570R can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens



**XPP-5570R**

- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Beam distance rated at 267 meters
- Meets the requirements for NFPA-1971-8.6 (2013)

# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-21 hrs, medium-42 hrs, low-84 hrs, floodlight high-21 hrs, medium-42 hrs, survival-84 hrs, dual-light-21 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 16.9 oz

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	200 LUMENS	200 LUMENS	100 LUMENS	60 LUMENS
	21h	21h	42h	84h
	235m	267m	199m	145m
	13836cd	22249cd	14828cd	7790cd
	2m			
	1m			

## INCLUDED

- AA Battery Carrier
- 6 AA batteries



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

Model	UPC 0 17398
XPP-5570R	80456 1

Permissible Nightstick XPP-5570 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**UL** LISTED E 467750 CE 0359

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light Rechargeable

This Rechargeable XPR-5572R Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572R has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572R utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens



**XPR-5572R**



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position



# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charger

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 13.7oz

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	200 LUMENS	200 LUMENS	100 LUMENS	60 LUMENS
	8h	6h	11h	22h
	235m	267m	199m	145m
	13836cd	22249cd	14828cd	7790cd
	2m			
	1m			

## INCLUDED

- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

Permissible Nightstick XPR-5572 Flashlight/Floodlight  
**MSHA** APPROVAL No. 20-A150005-0  
 TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY  
**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS  
 UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.  
 CLASS I DIV I GRPS A-D T3  
 CLASS II & III DIV I GRPS E-G  
 CLASS I ZONE 0 Group IIC T3  
 CLASS II ZONE 20 Group IIIC T3  
 -20°C ≤ Tamb ≤ +70°C

**UL** LISTED E 467750  
**CE** 0359

Model	UPC 0 17398
XPR-5572R	80458 5

# Intrinsically Safe Permissible

## Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base - Rechargeable

This Rechargeable XPR-5572RM Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572RM had two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Plus, the 5572RM utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. The included Multi-Angle Magnetic Base allows the light to slide and lock into place giving it an additional level of functionality. The powerful Rare-earth Magnet with its rubber protective covering attaches to virtually any ferrous metal surface. The single point locking lever can be used in conjunction with the gimbal head to focus the light exactly where it's needed. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens



TECHNOLOGY



XPR-5572RM



- cULus and MSHA certified Intrinsically Safe Permissible
- Flashlight/Floodlight/Dual-Light™
- Includes Multi-Angle Magnetic Base
- User-selectable brightness settings on Flashlight & Floodlight including 20 Lumen Survival mode on Floodlight
- Meets the requirements for NFPA-1971-8.6 (2013)
- Charger meets requirements of NFPA-1901 (2009) mounted in any position

# Intrinsically Safe Permissible

## FEATURES

- cULus and MSHA certified Intrinsically Safe Permissible
- CREE® LED technology – 50,000+ hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head
- Waterproof
- Impact & chemical resistant
- Light (w/o magnetic base) meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charger

Permissible Nightstick XPR-5572 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0  
TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex Ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-Ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV 1 GRPS A-D T3  
CLASS II & III DIV 1 GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIC T3  
-20°C ≤ Tamb ≤ +70°C

**UL** LISTED E 467750 0359



Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head

## SPECIFICATIONS

- Lumens: flashlight high-200, medium-100, low-60, floodlight high-200, medium 100, survival 20, dual-light-200
- Run-time: flashlight high-6 hrs, medium-11 hrs 30 min, low-22 hrs 30 min, floodlight high-6 hrs, medium-11 hrs 30 min, survival-30 hrs, dual-light-6 hrs
- Recharge time: 6 hours
- Beam distance: 267 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8 in, weight: 24.9oz w/ magnetic base

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	200 LUMENS	200 LUMENS	100 LUMENS	60 LUMENS
	8h	6h	11h	22h
	235m	267m	199m	145m
	13836cd	22249cd	14828cd	7790cd
	2m			
	1m			

## INCLUDED

- Angle Magnetic Base
- Rechargeable Lithium-ion Battery Pack
- Wall or Vehicle Mounted Charger
- AA Battery Carrier (AA batteries not included)
- AC & DC Power Supplies

Model	UPC 0 17398
XPR-5572RM	80466 0



## SAFETY RATING

cULus and MSHA certified Intrinsically Safe Permissible

# Safety Lights

## Safety Light/Flashlights



Each Safety Light combines a full-size flashlight and a floodlight/flushing safety light in a compact, light-weight package. Two body mounted switches control the lighting functions. The top button powers the tight-beam, long-throw 150 lumens flashlight in either momentary or constant-on mode. The bottom button controls the safety light array with options for constant-on or flashing/alternating (depending on model) operation. Power comes from 4 AA batteries (included).

**150** Flashlight Lumens

**120** Safety Light Lumens

- Constant-on or flashing safety light
- Long-throw flashlight beam
- Long run-times
- Powered by 4 AA batteries (included)



NSP-1162




NSP-1164



NSP-1166



NSP-1168



NSP-1170



NSP-1172



NSP-1174




NSP-1176



NSP-1178



NSP-1180



## Safety Lights

### FEATURES: ALL MODELS


- Flashlight with CREE® LED technology – 50,000 + hours LED life
- Floodlight/safety light with premium LED technology – 35,000 + hours LED life
- Momentary or constant-on white flashlight (all models)
- High/low-brightness single color floodlight or flashing safety light (1162, 1164, 1166 & 1168)
- Dual-color floodlight or alternating safety light (1170, 1172, 1176, 1178 & 1180)
- White floodlight or flashing amber safety light (1174)
- Sharp focused beam flashlight
- Wide-beam unfocused floodlight/safety light
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by 4 premium AA alkaline batteries (included)
- 1 Year Limited Warranty\*

### SPECIFICATIONS

- Lumens: flashlight-150, floodlight/safety light-120
- Run-time: flashlight-10 hrs, floodlight/safety light-model dependent (see chart)
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, diameter: 1.3 x .9in, weight: 8.2oz

### INCLUDED

- Safety light/flashlight
- 4 Premium AA alkaline batteries
- Magnetic clip
- Lanyard ring



High-efficiency deep parabolic reflector



Momentary or constant-on flashlight



Constant-on or flashing safety light (NSP-1170 Shown)

### MODELS/ACCESSORIES

MODELS					
Model	Safety Light Color	Safety Light Functions	Constant Safety Light Run-Time Hours	Flashing Safety Light Run-Time Hours	UPC 0 17398
NSP-1162	Red	Constant - half power - flashing	4 full power 8 half power	16	80102 7
NSP-1164	Blue	Constant - half power - flashing	4 full power 8 half power	16	80103 4
NSP-1166	White	Constant - half power - flashing	4 full power 8 half power	16	80104 1
NSP-1168	Amber	Constant - half power - flashing	4 full power 8 half power	16	80105 8
NSP-1170	Blue & Red	Constant or alternating flash	4 full power	16 alternating flasher	80106 5
NSP-1172	White & Red	Constant or alternating flash	4 full power	16 alternating flasher	80107 2
NSP-1174	White & Amber	Constant white - flashing amber	30 led floodlight = 8	24	80119 5
NSP-1174-K01	White & Amber	Constant white - flashing amber	30 led floodlight = 8	24	80125 6
NSP-1176	White & Amber	Constant or alternating flash	4 full power	16 alternating flasher	80114 0
NSP-1178	White & Blue	Constant or alternating flash	4 full power	16 alternating flasher	80138 6
NSP-1180	Amber & Green	Constant or alternating flash	4 constant amber / green	16 alternating flasher	80207 9



Model	Description	UPC 0 17398
1260-RCONE	Red cone	80085 3
1260-YCONE	Yellow cone	80086 0
1160-MSTAND	Magnet stand	80101 0
1160-BASE	Large magnetic base	80026 6
1160-MAGNET	Magnetic clip	80084 6
1260-BUMPERS	Impact bumpers	80135 5

# Rechargeable Safety Lights

## Safety Light/Flashlights Rechargeable



Nightstick Rechargeable Safety Light Flashlights combine a full-size flashlight and a flood/flashing safety light in an all LED compact lightweight package. Two body-mounted push buttons control the lighting functions. The top button powers the tight-beam, long-throw flashlight in either momentary or constant-on mode and the bottom button controls the safety light. Pressing the bottom button once turns on both sets of the colored safety lights at full power. Pressing the button a second time, causes the colored safety lights to alternately strobe between the two colors. Powered by a rechargeable Li-ion battery.

**150** Flashlight  
Lumens

**50** Safety Light  
Lumens

- Constant-on or flashing safety light
- Long-throw flashlight beam
- Long run-times
- Powered by rechargeable Li-ion battery



NSR-2070



NSR-2072



NSR-2078



# Rechargeable Safety Lights

## FEATURES: ALL MODELS

- Flashlight with CREE® LED technology – 50,000 + hours LED life
- Floodlight/safety light with premium LED technology – 35,000 + hours LED life
- Has both a tight-beam long-throw flashlight and a wide-angle two colored flashing safety light array
- Lighting modes: momentary and constant-on flashlight, full-power safety light, alternating color flashing safety light & dual-light (both the flashlight & safety light array at the same time)
- Two button design top: flashlight, bottom: safety light
- Light weight and durable
- Sharp focused beam flashlight
- Wide-beam unfocused floodlight/safety light
- Engineered polymer housing
- Non-slip grip
- Oval shape with textured body and soft-touch finish feels great in your hand
- Water resistant
- Impact & chemical resistant
- Powered by a rechargeable Li-ion battery
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-150, floodlight/safety light-50
- Run-time: flashlight-7.5 hrs, floodlight-4 hrs, safety light-6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 11.625in, diameter: 1.5 x 1.125, weight: 6.8oz

## INCLUDED

- Safety light/flashlight
- AC/DC power supplies



High-efficiency deep parabolic reflector



Momentary or constant-on flashlight



Constant-on or flashing safety light (NSP-2070 Shown)

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
1260-RCONE	Red cone	80085 3
1260-YCONE	Yellow cone	80086 0
1160-MSTAND	Magnet stand	80101 0
1160-BASE	Large magnetic base	80026 6
1160-MAGNET	Magnetic clip	80084 6
1260-BUMPERS	Impact bumpers	80135 5



Safety cones



Large magnetic base



Magnetic stand



Magnetic clip



NSP-1174-K01



Impact bumpers

## LED Traffic Wands

### Traffic Wands

Red  
Constant-On



Yellow  
Constant-On



Blue  
Constant-On



Red  
Strobe



Yellow  
Strobe



Blue  
Strobe



NSP-1632

NSP-1636

NSP-1634

Nightstick LED Traffic Wands feature a bright lumen output with a red, blue, or yellow cone and a black-formed handle for ultimate grip and comfort. One body mounted push button controls the On/Strobe/Off lighting functions. Pressing the button once, turns the light on constant-on mode, pressing the button a second time causes the light to strobe, and a third press of the button turns the light off. Power comes from 3 premium AAA batteries (included). The lightweight Nightstick LED Traffic Wands are ideal for daylight or night applications and are the perfect choice for air ground crews, directing traffic, or marking a potentially hazardous area.

- **Bright lumen output with a colored cone**
- **Lightweight durable construction**
- **Long run-time**
- **Waterproof**
- **Powered by 3 AAA batteries (included)**



NSP-1632

NSP-1634

NSP-1636





# LED Traffic Wands

## FEATURES: ALL MODELS

- Bright light for daylight or night use
- On/Strobe/Off functionality
- Single push button switch located on body for all modes
- IP-X7 Waterproof
- Lightweight for long use
- Light weight and durable
- Impact & chemical resistant
- Non-slip grip
- Powered by 3 AAA batteries (included)
- 1 Year Limited Warranty\*

## SPECIFICATIONS

- Constant-on run-time - 8 hrs.
- Strobe run-time - 27 hrs.
- Water rating - IP-X7 Waterproof
- Drop rating: 2 meters
- Length: 16.5in, diameter: 1.575in, weight: 5.3oz



## INCLUDED

- LED Traffic Wand
- 3 - AAA Batteries



Model	UPC 0 17398
NSP-1632	80501 8
NSP-1634	80502 5
NSP-1636	80503 2





## Feature Overview

### FULL-SIZE

### MULTI-PURPOSE

### HEADLAMPS

	NSR-9744XL	NSR-9746XL	NSP-1206	NSP-1224	NSP-1260	NSP-1400	NSP-1402	NSP-1404	NSP-2422	NSR-2492	SLR & NSR-2166	NSR-2168	SLR-2120	SLR-2124	NSR-2522RM	NSP-4602B	NSP-4603B	NSP-4604B	NSP-4605B
ANSI FL1	●	●	●	●		●	●	●	●	●		●			●	●	●	●	●
Flash/Flood Dual-Light™	●		●	●	●	●	●	●	●	●	Spot Flood	●			●	●		●	
Multi-Function	●	●			●									●			●		●
Strobe Mode	●	●												●					
Rechargeable Battery Pack	Li	Li								NiMH	NiMH	Li	Li	Li	Li				
Alkaline Batteries			●	●	●	●	●	●	●							●	●	●	●
Lithium CR-123																			
Metal Housing	●	●																	
Polymer Housing			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Soft-Touch Finishing			●	●	●	●	●	●				●				●	●	●	●
Waterproof	●	●							●						●	●	●	●	●
Water Resistant			●	●	●	●	●	●		●	●	●	●	●					
Chemical Resistant	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Single Button		●	●	●							●	●				●	●	●	●
Two Button	●				●	●	●	●	●	●			●	●	●				
Tail-Cap Switch																			
Limited Lifetime Warranty	●	●													●				
Limited 1 Year Warranty			●	●	●	●	●	●	●	●	●	●	●	●		●	●	●	●

# Feature Overview

## HEADLAMPS

## INTRINSICALLY SAFE

SAFETY LIGHTS    TRAFFIC WANDS

NSP-4606B	NSP-4608	NSP-4610	NSP-4612	NSP-4614B	NSP-4616B	XPP-5410	XPP-5412	XPP-5420	XPP-5422	XPP-5422GM	XPP-5450	XPP-5452	XPP-5454	XPP-5456	XPP-5458	XPP-5570	XPR-5572	NSP-1162-1180	NSR-2070-2078	NSP-1632-1636	
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
•	•	Spot Flood	•	•	•				•	•			•	•	•	•	•	•	•		
	•	•	•	•	•								•	•	•	•	•		•		
																		•	•	•	
																	•		Li		
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•																•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			•
																			•	•	
	•	•	•	•	•				•	•			•	•	•	•	•	•	•	•	
						•	•														
	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•			
•																			•	•	•

## Accessories

MT-110	FDL-300	TAC-400	TAC-500	9514	9744XL	1162	2070	1206	1260	1400	2422	2166	5450	UPC 017398
MT-120	TAC-300	TAC-410XL	TAC-510XL	9614	9746XL	1164	2072	1224	1260	1402	2522RM	2166	5452	
MT-210	TAC-310XL	TAC-450	TAC-540XL	9920XL		1166	2074			1404			5454	
MT-220	TAC-350	TAC-460XL	TAC-550	9924XL		1168	2078						5456	
MT-230	TAC-360XL		TAC-560XL	9940XL		1170							5458	
				9944XL		1172								

### CONES

200-RCONE	Red safety cone		X	X	X									80131 7
200-YCONE	Yellow safety cone		X	X	X									80132 4
300-FILTER	TAC Light Filter Set		X	X	X									
1200-RCONE	Red safety cone							X		X				70002 3
1200-YCONE	Yellow safety cone							X		X				70001 6
1260-RCONE	Red safety cone						X		X					80085 3
1260-YCONE	Yellow safety cone						X		X					80086 0
9600-RCONE	Red safety cone					X								80226 0
9600-YCONE	Yellow safety cone					X	9744XL							80228 4
9600-BCONE	Blue safety cone					X	9744XL							80223 9
9700-RCONE	Red safety cone						9746XL							80313 7
9700-YCONE	Yellow safety cone						9746XL							80314 4
9700-BCONE	Blue safety cone						9746XL							80315 1

### HOLSTER / BELT RINGS

MT-HOLSTER1	Belt holster	X											5410	80464 6
200-HOLSTER	Belt holster		X	X	X									80233 8
300-HOLSTER	Belt holster		X	X	X									80454 7
1200-HOLSTER	Belt holster							X						70003 0
5420-HOLSTER	Belt holster										X		X	80234 5
9850-BRBW	Basket weave leather belt ring						9746XL							98501 7
9850-BRBW	Nylon belt ring						9746XL							98502 4
9850-BRPL	Patent leather belt ring						9746XL							98503 1
9850-BRSL	Standard leather belt ring						9746XL							98504 8
NS-BR1	Nylon belt ring					X	X							





## ANSI FL-1



NSR-9614XL

### Compare Flashlight Performance at a Glance

- ❖ Prior to the ANSI/PLATO FL-1 standards there were no standardized tests or uniform rating systems to objectively evaluate flashlight performance.
- ❖ ANSI/PLATO FL-1 standard allows consumers to compare the technical performance of flashlights using an easy to understand icon format.
- ❖ Manufacturers of flashlights voluntarily invest in the effort and technology necessary to measure their flashlights performance.

## Understanding ANSI / PLATO FL-1 Icons

<p>How much light is available?</p>		<p><b>Light Output</b> Total light output measured in Lumens. Lumens have become the most commonly used unit of measure for total light output in portable lighting devices.</p>
<p>How far will the beam throw?</p>		<p><b>Beam Distance</b> The distance, measured in meters, at which the light projects a useful amount of light, measured at 0.25 lux. (0.25 lux is approximately the equivalent of light emitted from a full moon "on a clear night in an open field.")</p>
<p>How bright is the light?</p>		<p><b>Peak Beam Intensity</b> The brightest point in the beam measured in candela. Candela is the modern unit of measure for light intensity replacing the now-obsolete unit known as candlepower.</p>
<p>How long can I operate the light?</p>		<p><b>Run-Time</b> Tested with fresh batteries from 30 seconds after the light is turned on until the light output reaches 10% of the initial measurement. This is the total time of useable light before most consumers will change batteries.</p>
<p>What drop distance will the light survive?</p>		<p><b>Impact Resistance</b> The height, measured in meters, from which the light can be dropped onto cured concrete and still work properly. This testing is completed by dropping the product (6) times using drop orientations that approximate each side of a cube. Dropped samples cannot have any visible cracks or breaks and must remain fully functional. The product must meet a minimum of (1) meter to receive this rating.</p>
<p>How well is the light protected from water?</p>		<p><b>Water Resistance</b> This icon indicates an IPX4 rating which means the sample is tested against water sprayed from all angles. If this test is performed, it must be done after impact resistance testing is completed to ensure water resistance under real-life conditions.</p>
		<p><b>Water Proof</b> Water submersion depth rating, measured in meters. This icon indicates at least an IPX7 rating which means the sample is submerged to a minimum of 1 meter depth for 30 minutes. If this test is performed, it must be done after impact resistance testing is completed to ensure water tightness under real-life conditions.</p>





# Understanding Dual-Light

**Flashlights:** Designed for distance illumination. The center spot makes them too bright for objects that are close.

**Floodlights:** Designed to light up things that are close. Wide, even lighting with no bright center spot.

**Dual-Light:** Combines a flashlight and a floodlight into the same light. Two lighting tools in one. Completely transforming the way hand-held lights are used.

# ANSI FL-1 Flashlight Lumens & Beam Distance

		BEAM DISTANCE - METERS					
	Lumens	0	100	200	300	400	500
MT-100	100		44m				
MT-110	90		48m				
MT-120	140		68m				
MT-130	140		64m				
MT-140	180		99m				
MT-200	100		51m				
MT-210	120		70m				
MT-220	200		100m				
MT-230	60		65m				
TAC-300/350	180		190m				
FDL-300R	180		190m				
TAC-302	150		180m				
TAC-400/450	200		210m				
TAC-500/550	200		210m				
TAC-310/360XL	350		190m				
TAC-410/460XL	525		230m				
TAC-510/540/560XL	800		205m				
NSP-9842XL	650		280m				
NSR-9844XL	650		280m				
NSR-9514	650		325m				
NSR-9614	650		325m				
NSR-9920/24XL	650		275m				
NSR-9940/9944XL	650		275m				
NSR-9746XL	650		450m				
NSR-9744XL	650		275m				

## BEAM DISTANCE - METERS

	Lumens	0	100	200	300	400	500	
NSP-1400	60							50m
NSP-2422	130							181m
NSP-2492	200							170m
NSR-2522RM	250							213m
NSP-4602	9							18m
NSP-4603	120							144m
NSP-4604	55							50m
NSP-4605	150							175m
NSP-4606	140							116m
NSP-4608	100							77m
NSP-4610	150							60m
NSP-4612	100							140m
NSP-4614	300							76m
NSP-4616	450							78m
XPP-5410	30							40m
XPP-5412	50							50m
XPP-5420	140							180m
XPP-5422	120							170m
XPP-5450	60							80m
XPP-5452	115							92m
XPP-5454	115							82m
XPP-5456	100							140m
XPP-5458	130							120m
XPP-5570	200							267m
XPR-5572	200							

## Safety in Hazardous Environments

### FIRE AND EXPLOSION RISK

Industrial and production operations are prime environments for the potential build-up of combustible gases, liquids, dust and other ignitable sources. Fire and explosion hazards can occur in that environment. Working in a hazardous environment requires fixed and portable task lighting that are intrinsically safe to keep personnel and property safe from explosion and fire.

### WHAT DOES IT MEAN WHEN A DEVICE IS INTRINSICALLY SAFE?

A device that is intrinsically safe means that it is safe to use in hazardous work environments and by itself will not cause a fire or explosion. Maintaining intrinsic safety requires that the light be used properly and not tampered with so the intrinsically safe capability remains in tact.



An explosive atmosphere is defined as a mixture of dangerous substances with air, under atmospheric conditions, in the form of gases, vapors, mist or dust in which, after ignition has occurred, combustion spreads to the entire unburned mixture.

	Model							
	XPP-5410	✓		✓	✓	✓	✓	✓
	XPP-5412	✓		✓	✓	✓		
	XPP-5420G XPP-5420B	✓		✓	✓	✓	✓	✓
	XPP-5422G XPP-5422B	✓		✓	✓	✓	✓	✓
	XPP-5422GM	✓		✓	✓	✓		✓
	XPP-5450 XPP-5452	✓		✓	✓	✓		✓
	XPP-5454G XPP-5454GC	✓		✓	✓	✓		✓
	XPP-5456 XPP-5458	✓		✓	✓	✓	✓	
	XPP-5570 XPR-5572		✓				✓	

† As of the printing of this catalog

## TESTING LABORATORIES



### ETL

The ETL Listed Mark is proof of product compliance (electrical, gas and other safety standards) to North American safety standards, including UL, ANSI, CSA, ASTM and NFPA standards



### cULus

The cULus Listed Mark indicates products have been evaluated and are in compliance with both Canadian and U.S. safety requirements.



### ATEX Directive

The European based ATEX directive defines the equipment and work environment that is allowed to function in an explosive atmosphere. The regulations apply to all equipment intended for use in explosive atmospheres, either electrical or mechanical, including protective systems. The directive covers a large range of equipment where a potentially explosive atmosphere may be present.



### CE

CE mark is the official marking required by the European Community for products that will be sold, or put into service in the European community. The product fulfills all essential safety and environmental requirements for the product's intended use, as they are defined in the European Directives, primarily ISO Standards.



### IECEX

The IECEX is the International Electrotechnical Commission system for the certification to standards for electrical equipment for explosive atmospheres.



### MSHA

Mine Safety and Health Administration requires that portable battery operated lighting be designed and tested to not pose an explosion hazard in mining operations.



### INMETRO

National Institute of Metrology, Quality and Technology (Inmetro) supports Brazilian




## Why Make a Flashlight Using Bulbs?



### Some manufacturers are still making flashlights with incandescent bulbs.

Even the best xenon and krypton bulbs break when the light is dropped and can also produce a yellow color light that distorts the appearance of the object being illuminated.

**At Nightstick we believe in using the best available technology.**

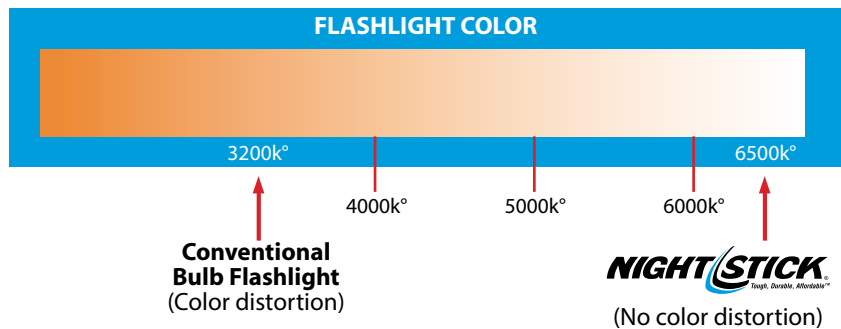

NSR-9614XL

### World's Best LEDs

All Nightstick flashlights use LED technology from CREE® the makers of the brightest and most rugged LEDs in the world.

CREE® brilliant white-light LED's have an operating life in excess of 50,000 hours. That means if you use a Nightstick flashlight 8 full hours every workday of the year, the CREE® LED would last over 24 years. A Nightstick flashlight could literally be the last flashlight you will ever need.

We select the whitest LEDs so objects are illuminated with no color distortion. Reflectors are designed to efficiently capture and concentrate light from the LEDs for maximum beam distance.

# Battery Characteristics



Standard use  
rechargeable NiMH



Standard use  
rechargeable Lithium-ion



Standard use  
Lithium air CR-123



Standard use alkaline  
AA – AAA - AAAA



Standard use  
NiCd

<p><b>Nickel Metal Hydride NiMH</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for modern LED rechargeable flashlights</li> <li>▪ Virtually no memory effect. Near full capacity every charge cycle</li> <li>▪ 2 times the energy capacity of comparable NiCd battery</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>
<p><b>Rechargeable Lithium</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Higher energy density than NiCd, NiMH and alkaline batteries</li> <li>▪ No memory effect</li> <li>▪ High cell voltage</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life - Very long operating life, 15 to 20 years</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>
<p><b>Lithium Air Cells CR-123</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Very high energy density for its size</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life</li> </ul>
<p><b>Alkaline Batteries AA, AAA, AAAA</b></p>	<ul style="list-style-type: none"> <li>▪ The most popular premium general purpose battery</li> <li>▪ Four times the capacity of an equivalent size rechargeable NiCd or NiMH battery</li> <li>▪ Suitable for high drain rate applications</li> <li>▪ Good shelf life</li> <li>▪ Not normally rechargeable</li> </ul>
<p><b>Nickel Cadmium NiCd</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for old style flashlights with xenon bulbs</li> <li>▪ Flat discharge characteristic but falls off rapidly at the end of the cycle</li> <li>▪ Major drawback is recharge memory effect. During charging a chemical process is degrading the battery's ability to store energy. Each charge degrades the battery more. Eventually the battery can no longer be charged</li> <li>▪ Use of heavy metals makes it environmentally toxic</li> <li>▪ Typical cycle life is over 500 cycles</li> </ul>

# Innovation • Quality • Safety

For over 30 years, Bayco Products' vast array of portable & corded lighting products, have been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized world-wide as high-performance, high-quality, high-value lighting solutions across virtually every industry.

Headquartered in North Texas, Bayco Products' 110,000 square foot facility is the international headquarters for R&D, engineering, marketing, sales and distribution. Bayco Products has dedicated ISO 9001 Certified factories both in the US and abroad.



**BAYCO**  
PRODUCTS INC.®

**NIGHTSTICK**  
Tough, Durable, Affordable™

Nightstick is the exclusive brand of professional lighting tools made by Bayco Products, Inc.



# Engineering • Testing • Manufacturing

*Nightstick flashlights are designed in the USA and manufactured at Bayco's dedicated ISO 9001 Certified Factories.*



*Rigorous quality testing and analysis is utilized to insure product quality and consistency*



*Our luminosity and testing facility measures product performance to confirm complex design parameters*




# NIGHTSTICK®

Tough, Durable, Affordable™

## Professional Intrinsically Safe

Penlights, Flashlights,  
Dual-Light™ Flashlights,  
Headlamps & Angle Lights



# 2016





## ***Understanding Dual-Light™***

TECHNOLOGY

***Flashlights:*** Designed for distance illumination. The center spot makes them too bright for objects that are close.



***Floodlights:*** Designed to light up things that are close. Wide, even lighting with no bright center spot.



**Dual-Light™**: Combines a flashlight and a floodlight into the same light. Two lighting tools in one. Completely transforming the way hand-held lights are used.



# Polymer Dual-Light™ Flashlights

These Dual-Light™ Flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**



Flashlight



Floodlight



Dual-Light



Floodlight



TECHNOLOGY

**XPP-5422G**

**120** Flashlight  
Lumens

**120** Floodlight  
Lumens

**240** Dual-Light™  
Lumens



**XPP-5422B**



## FEATURES

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light™ (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip with dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*



Built in  
pocket/belt clip



Dual body switches




High-efficiency deep  
parabolic reflector



Wide-beam  
floodlight

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, Dual-Light™-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, Dual-Light™-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## SAFETY RATING

Permissible Nightstick 5422 Flashlight/Floodlight



APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.

- 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
- 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
- 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.



ID 4003544  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE



Intertek

CLASS I DIV 1 GRPS A-D T3  
CLASS II & III DIV 1 GRPS E-G T135C  
CLASS I ZONE 0 AEx ia IIC T3 Ga  
CLASS I ZONE 0 Ex ia IIC T3 Ga  
Ⓜ I M I Ex ia I Ma  
Ⓜ II 1 G Ex ia IIC T3 Ga

Ex ia I Ma  
Ex ia IIC T3 Ga

Intertek ITS 13 ATEX27837X  
IECEx ETL 13.0026X  
-20°C ≤ Tamb ≤ +40°C  
1.5V/Cell AA Alkaline

Conforms to:

ANSI/UL STD 913, ANSI/UL  
60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

Certified to:

CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

Model

UPC 0 17398

XPP-5422G

80093 8

XPP-5422B

80094 5

# Polymer Dual-Light™ Flashlight w/ Dual Magnets

This Dual-Light™ Flashlight with dual magnets is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



Floodlight



Dual-Light



Floodlight



TECHNOLOGY

**120** Flashlight  
Lumens

**120** Floodlight  
Lumens

**240** Dual-Light™  
Lumens

**XPP-5422GM**




## FEATURES

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light™ (flashlight & floodlight at same time) for maximum versatility and user safety
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty\*



Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle



High-efficiency deep parabolic reflector



Wide-beam floodlight

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, Dual-Light™ -240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, Dual-Light™ -4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz

FL 1 STANDARD		
120 LUMENS	17h 30min	170m
7250cd	2m	1m

## SAFETY RATING

Permissible Nightstick 5422 Flashlight/Floodlight	
<b>MSHA</b>	APPROVAL No. 20-A130001-0
TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY	
WARNINGS: MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only. The Model Nightstick 5422 must not be opened in areas where permissibility is required.	
ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	0359
CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma CLASS II & III DIV 1 GRPS E-G T13C Ex ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Intertek IIS 13 ATEX27837X CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0026X Ⓢ I M 1 Ex ia I Ma -20°C ≤ Tamb ≤ +40°C Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AA/Alkaline	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422GM	80448 6



# Polymer Flashlights

These flashlights are cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**



Flashlight



**XPP-5420G**

**140 Lumens**



**XPP-5420B**

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Engineered polymer housing
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*



Built in  
pocket/belt clip



Single body  
switch



High-efficiency  
deep parabolic  
reflector

## SPECIFICATIONS

- Lumens: 140
- Run-time: 14 hrs
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 7.3oz

FL 1 STANDARD		
140 LUMENS	14h	180m
7500cd	2m	1m

## SAFETY RATING

Permissible Nightstick 5420 Flashlight

**MSHA** APPROVAL No. 20-A130001-0  
TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	0359	
--	--	------	--

**Intertek** CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
CLASS II & III DIV 1 GRPS E-G T135C Ex ia IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27837X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0026X  
-20°C ≤ Tamb ≤ +40°C  
Ⓢ I M 1 Ex ia I Ma  
Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AA Alkaline

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5420G	80091 4
XPP-5420B	80092 1

# Polymer Penlight

This penlight is cETLus, ATEX, IECEx, INMETRO and MSHA listed Intrinsically Safe Permissible. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

Flashlight



**30 Lumens**



**XPP-5410G**

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 2 AAA batteries (included)
- Limited Lifetime Warranty\*



XPP-5410G




High-efficiency deep parabolic reflector



Push-button tail-cap switch

## SPECIFICATIONS

- Lumens: 30
- Run-time: 18 hrs
- Beam distance: 40 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.8in, head diameter: 0.9in, handle diameter: 0.7in, weight: 1.9oz



## SAFETY RATING

Permissible XPP-5410 Flashlight Assembly

**MSHA** APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNING: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MQ2400), Duracell (PC2400), and Duracell (EN20) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in areas where permeability required.

**Intertek** ID 4001194  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

**CE** 0350

**Explosion Protection**

CLASS I DIV I GRP5 A-D T3 Ex ia op sI Ma  
CLASS II & III DIV I GRP5 E-G T135C Ex ia op sIIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX2789X  
CLASS I ZONE 1 Ex ia IIC T3 Ga IECEx TS 14.0309X  
● M 1 Ex ia op sI Ma 20°C ≤ Tamb ≤ +40°C  
● I 2 Ex ia op sIIC T3 Ga 1.5 D/CB/AAA Alkaline

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5410G	80298 7

Patent 7,738,229

# Polymer Penlight

This penlight is cETLus, ATEX and IECEx listed Intrinsically Safe. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).

**INTRINSICALLY SAFE**

Flashlight



**50 Lumens**

**XPP-5412G**

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 3 AAAA batteries (included)
- Limited Lifetime Warranty\*



XPP-5412G



High-efficiency deep parabolic reflector



Push-button tail-cap switch

## SPECIFICATIONS

- Lumens: 50
- Run-time: 13.75 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.8in, head diameter: 0.6in, handle diameter: 0.5in, weight: 1.5oz



FL 1 STANDARD		
50 LUMENS	13h 45min	50m
161cd	2m	1m

## SAFETY RATING

Nightstick 5412 Penlight



ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma  
CLASS II & III DIV1 GRPS E-G T135C Ex ia op is IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27839X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 14.0036X  
Ⓜ I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C  
Ⓜ II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AAAA Alkaline

CE 0359

Conforms to:  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:  
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5412G	80299 4

Patent 7,738,229

# Dual-Function Headlamp

This Dual-Function Headlamp is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA premium batteries (included).

**INTRINSICALLY SAFE**

Spot High

Spot Low



**60/40 Lumens Spotlight**

**XPP-5450G**

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof, impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*



Heavy-duty rubber head strap

## SPECIFICATIONS

- Lumens: high spotlight-60, low spotlight-40
- Run-time: high spotlight-13.5 hrs, low spotlight-22.75 hrs
- Beam distance: 80 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz



## SAFETY RATING

FL1 STANDARD	HIGH	LOW
	<b>60 LUMENS</b>	<b>40 LUMENS</b>
	<b>13h</b>	<b>22h</b>
	<b>80m</b>	<b>65m</b>
	<b>1615cd</b>	<b>1076cd</b>
	<b>2m</b>	<b>1m</b>

Nightstick 5450 Headlamp

**ETL** US  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

Intertek

ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

Conforms to:  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

Certified to:  
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

**Model** XPP-5450G  
**UPC 0 17398** 80300 7

Patent 7,738,229

# Dual-Function Headlamp

This Dual-Function Headlamp is cETLus, ATEX and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA premium batteries (included).

**INTRINSICALLY SAFE**

Spot High

Spot Low



**115/65 Lumens**  
**Spotlight**

**XPP-5452G**

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof, impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*



Heavy-duty rubber head strap

## SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-65
- Run-time: high spotlight-4.5 hrs, low spotlight-13 hrs
- Beam distance: 92 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz



## SAFETY RATING

Nightstick 5452 Headlamp

 ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE







CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

© 2009

Conforms to: ANSII/UL STD 913, ANSII/UL 60079-0, ANSII/UL 60079-11, ANSHISA 60079-26  
Certified to: CANCSA STD C22.2 No 157, CANCSA STD C22.2 No 60079-0, CANCSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5452G	80301 4


Patent 7,738,229

FL 1 STANDARD	HIGH	LOW
	<b>115</b> LUMENS	<b>65</b> LUMENS
	<b>4h 30min</b>	<b>13h</b>
	<b>92m</b>	<b>67m</b>
	<b>2152cd</b>	<b>1141cd</b>
	<b>2m</b>	
		<b>1m</b>

# Multi-Function Dual-Light™ Headlamp

This Multi-Function Dual-Light™ headlamp is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light™ design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**



TECHNOLOGY



XPP-5454G

**160** Lumens  
Dual-Light™

**115/60** Lumens  
Spotlight

**120/60** Lumens  
Floodlight









## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Focused spotlight beam for distance illumination
- Wide unfocused floodlight beam for close-up illumination
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*



## XPP-5456G SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light™ -160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light™ -3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	LOW
	<b>160 LUMENS</b>	<b>115 LUMENS</b>	<b>60 LUMENS</b>
	<b>3h 30min</b>	<b>5h</b>	<b>16h</b>
	<b>94m</b>	<b>82m</b>	<b>60m</b>
	<b>1711cd</b>	<b>1668cd</b>	<b>882cd</b>
	<b>2m</b>		
	<b>1m</b>		

## SAFETY RATING

Nightstick 5454 Headlamp


 ID 4008947  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE


 NCC 19438.8

**Intertek**  
 CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
 CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27928X  
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEX ETL 13.0045X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
 ⓈII 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157  
 CAN/CSA STD C22.2 No 60079-0  
 CAN/CSA STD C22.2 No 60079-11  
 CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5454G	80427 1



# Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip

This Multi-Function Dual-Light™ Headlamp w/ Hard Hat Clip is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**



**TECHNOLOGY**



**XPP-5454GC**

**160 Lumens**  
**Dual-Light™**

**115/60 Lumens**  
**Spotlight**

**120/60 Lumens**  
**Floodlight**



## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Integrated Stainless Steel Clip for use with most hard hat mounting brackets
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-light™ (any spotlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Waterproof
- Impact & chemical resistant
- Powered by 3 AAA batteries (included)
- Limited Lifetime Warranty\*



## XPP-5454GC SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, Dual-Light™ -160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, Dual-Light™ -3.5 hrs
- Beam distance: 94 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.4oz

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	<b>160 LUMENS</b>	<b>115 LUMENS</b>	<b>60 LUMENS</b>
	<b>3h 30min</b>	<b>5h</b>	<b>16h</b>
	<b>94m</b>	<b>82m</b>	<b>60m</b>
	<b>1711cd</b>	<b>1668cd</b>	<b>882cd</b>

## SAFETY RATING

**Nightstick 5454 Headlamp**

CLASS I DIV 1 GRPS A-D T3  
CLASS II & III GRPS E-G T135C  
CLASS I ZONE 0 AEx ia IIC T3 Ga  
CLASS I ZONE 0 Ex ia IIC T3 Ga  
ⓈII 1 G Ex ia IIC T3 Ga

ID 4008947  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

Ex ia IIC T3 Ga  
Intertek ITS 13 ATEX27928X  
IECEx ETL 13.0045X  
-20°C ≤ Tamb ≤ +40°C  
1.5V/Cell AAA Alkaline

**Intertek**

**CE** 0359

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5454GC	80450 9

# Multi-Function Dual-Light™ Headlamp

This Multi-Function Dual-Light™ Headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a red colored floodlight operation. Power comes from 3 AA premium batteries (included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

XPP-5456G

**175 Lumens**  
**Dual-Light**

**100 Lumens**  
**Spotlight**

**90/20 Lumens**  
**White Floodlight**

**18 Lumens**  
**Red Floodlight**



TECHNOLOGY



XPP-5456G



## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing with dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap & heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

White & Red Floodlight

Spotlight Switch

Spotlight

Two Level White Floodlight

Night Vision Red



## XPP-5456G SPECIFICATIONS

- Lumens: spotlight-100, high white floodlight-90, low white floodlight-20, red floodlight-18, Dual-Light™ -175
- Run-time: spotlight-18 hrs, high white floodlight-13.5 hrs, low white floodlight-75 hrs, red floodlight-37 hrs, Dual-Light™-6.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	<b>175</b> LUMENS	<b>100</b> LUMENS
	<b>6h 30min</b>	<b>18h</b>
	<b>154m</b>	<b>140m</b>
	<b>5291cd</b>	<b>4820cd</b>

## SAFETY RATING

Permissible Nightstick XPP-5456G Headlamp

**MSHA** APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.

2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.

3) Replace the batteries in fresh air only.

4) Replace all batteries at the same time.

5) Do not mix batteries from different manufacturers or of different types.

6) The Model XPP-5456G Safety Headlamp must not be opened in areas where permissibility is required.

7) The Model XPP-5456G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approved as a cap lamp under 30CFR, Part 19.



CLASS I DIV 1 GRPS A-D T3

Ex ia I Ma

CLASS II & III DIV 1 GRPS E-G T13SC

Ex ia IIC T3 Ga

CLASS I ZONE 0 Ex ia IIC T3 Ga

Intrinsically Safe ITC13 ATEX27838X

CLASS I ZONE 0 Ex ia IIC T3 Ga

IECEx ETL 13.0025X

Ⓜ I M 1 Ex ia I Ma

-20°C ≤ Tamb ≤ +40°C

Ⓜ II 1 G Ex ia IIC T3 Ga

1.5V/Cell AA Alkaline

Intertek  
ID 4003544  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE


CE 0359

**Conforms to:**

ANSI/UL STD 913, ANSI/UL  
60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

**Certified to:**

CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25



Heavy-duty rubber  
head strap

Model	UPC 0 17398
XPP-5456G	80156 0

# Multi-Function Dual-Light™ Headlamp

This Multi-Function Dual-Light™ Headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a green colored floodlight operation. Power comes from 3 AA premium batteries (included).

**INTRINSICALLY SAFE  
PERMISSIBLE**

XPP-5458G

**190 Lumens**  
**Dual-Light**

**130 Lumens**  
**Spotlight**

**100/25 Lumens**  
**Floodlight**

**21 Lumens**  
**Green Floodlight**



TECHNOLOGY

XPP-5458G



## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – green floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Green colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing with dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap & heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

White & Green Floodlight

Spotlight Switch

Spotlight

Two Level White Floodlight

High-Contrast Green



## XPP-5458G SPECIFICATIONS

- Lumens: spotlight-130, high white floodlight-100, low white floodlight-25, green floodlight-21, Dual-Light™-190
- Run-time: spotlight-14 hrs, high white floodlight-12.5 hrs, low white floodlight-70 hrs, green floodlight-37 hrs, Dual-Light™-6 hrs
- Beam distance: 120 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	<b>190</b> LUMENS	<b>130</b> LUMENS
	<b>6h</b>	<b>14h</b>
	<b>132m</b>	<b>120m</b>
	<b>3500cd</b>	<b>3500cd</b>

## SAFETY RATING

Permissible Nightstick XPP-5458G Headlamp

**MSHA** APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.

2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.

3) Replace the batteries in fresh air only.

4) Replace all batteries at the same time.

5) Do not mix batteries from different manufacturers or of different types.

6) The Model XPP-5458G Safety Headlamp must not be opened in areas where permissibility is required.

7) The Model XPP-5458G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approved as a cap lamp under 30CFR, Part 19.



CLASS I DIV 1 GRPS A-D T3

Ex ia I Ma

CLASS II & III DIV 1 GRPS E-G T135C

Ex ia IIC T3 Ga

CLASS I ZONE 0 AEx ia IIC T3 Ga

Intermark ITS 13 ATEX27838X

CLASS I ZONE 0 Ex ia IIC T3 Ga

IECEx ETL 13.0025X

● I M 1 Ex ia I Ma

-20°C ≤ Tamb ≤ +40°C

● II 1 G Ex ia IIC T3 Ga

1.5V/Cell AA Alkaline

Intertek  
ID 4003544  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE


CE 0359

Conforms to:

ANSI/UL STD 913, ANSI/UL  
60079-0, ANSI/UL 60079-11  
ANSI/ISA 60079-26

Certified to:

CAN/CSA STD C22.2 No 157  
CAN/CSA STD C22.2 No 60079-0  
CAN/CSA STD C22.2 No 60079-11  
CSA STD C22.2 No 25



Heavy-duty rubber  
head strap

Model	UPC 0 17398
XPP-5458G	80158 4

# Multi-Function Dual-Light™ Angle Light

## Non-Rechargeable Batteries Included

This XPP-5570G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/Non-Rechargeable Batteries is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570G has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570G utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570G can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.

**INTRINSICALLY SAFE  
PERMISSIBLE**



TECHNOLOGY

**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens









XPP-5570G

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-Light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*

## XPP-5570G SPECIFICATIONS

- Lumens: high flashlight-200, medium flashlight-100, low flashlight-60, high floodlight-200, medium floodlight-100 survival floodlight 20, Dual-Light™ -200
- Run-time: high flashlight-21 hrs, medium flashlight-42 hrs, low flashlight-84 hrs, high floodlight-21 hrs, medium floodlight-42 hrs, survival floodlight-84 hrs, Dual-Light™ -21 hrs
- Beam distance: 267 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8in, weight: 16.9oz

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>200</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>21h</b>	<b>21h</b>	<b>42h</b>	<b>84h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>
	<b>2m</b>			
	<b>1m</b>			

Model	UPC 0 17398
XPP-5570G	80455 4

## SAFETY RATING

Permissible Nightstick XPP-5570 Flashlight/Floodlight



APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.



Ex Ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 0 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



# Multi-Function Dual-Light™ Angle Light Rechargeable

This Rechargeable XPR-5572G Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572G has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572G utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



TECHNOLOGY

**200** Flashlight Lumens

**200** Floodlight Lumens

**200** Dual-Light™ Lumens



XPP-5572G



## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-Light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*

## XPP-5572G SPECIFICATIONS

- Lumens: high flashlight-200, medium flashlight-100, low flashlight-60, high floodlight-200, medium floodlight-100 survival floodlight 20, Dual-Light™-200
- Run-time: high flashlight-6 hrs, medium flashlight-11 hrs 30 min, low flashlight-22 hrs 30 min, high floodlight-6 hrs, medium floodlight-11 hrs 30 min, survival floodlight-30 hrs, Dual-Light™ -6 hrs
- Beam distance: 267 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8in, weight: 13.7oz

FL 1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200 LUMENS</b>	<b>200 LUMENS</b>	<b>100 LUMENS</b>	<b>60 LUMENS</b>
	<b>8h</b>	<b>6h</b>	<b>11h</b>	<b>22h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>
	<b>2m</b>			
	<b>1m</b>			

Model	UPC 0 17398
XPR-5572G	80457 8

## SAFETY RATING

Permissible Nightstick XPR-5572 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A D T3  
CLASS II & III DIV I GRPS E-G  
CLASS II ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C

**UL** US  
LISTED  
E 467750  
**CE** 0359



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charger

# Multi-Function Dual-Light™ Angle Light Batteries Included

This XPP-5570R Intrinsicly Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsicly Safe Permissible. This is a Flashlight, Floodlight and Dual-Light Angle Light all in one rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5570R has two additional features that don't exist in any other competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode," provides just enough light in an emergency situation with a run-time of 3 ½ days. Second, the 5570R utilizes Nightstick's exclusive Dual-Light mode, the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, and see the ground in front of them as they walk or work. Power comes from 6 AA batteries. The XPP-5570R can be upgraded at any time to a fully rechargeable model by simply adding the optional Rechargeable Lithium-ion battery pack, the charger and the AC and/or DC Power Supply.

**INTRINSICALLY SAFE  
PERMISSIBLE**



TECHNOLOGY

**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens



XPP-5570R

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-Light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 6 – AA batteries (included)
- Upgradeable to rechargeable by adding Lithium-ion Battery Pack, Charger and AC and/or DC Power Supply
- Limited Lifetime Warranty\*

## XPP-5570R SPECIFICATIONS

- Lumens: high flashlight-200, medium flashlight-100, low flashlight-60, high floodlight-200, medium floodlight-100 survival floodlight 20, Dual-Light™ -200
- Run-time: high flashlight-21 hrs, medium flashlight-42 hrs, low flashlight-84 hrs, high floodlight-21 hrs, medium floodlight-42 hrs, survival floodlight-84 hrs, Dual-Light™ -21 hrs
- Beam distance: 267 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8in, weight: 16.9oz

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>200</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>21h</b>	<b>21h</b>	<b>42h</b>	<b>84h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>

Model	UPC 0 17398
XPP-5570R	80456 1

## SAFETY RATING

### Permissible Nightstick XPP-5570 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5570 must not be used in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.



Ex Ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip

# Multi-Function Dual-Light™ Angle Light Rechargeable

This Rechargeable XPR-5572R Intrinsicly Safe Permissible Multi-Function Dual-Light™ Angle Light is cULus and MSHA certified Intrinsicly Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572R has two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Second, the 5572R utilizes Nightstick's exclusive Dual-Light mode...the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



TECHNOLOGY

**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens








XPR-5572R

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-Light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Waterproof
- Impact & chemical resistant
- Light meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*

## XPP-5572R SPECIFICATIONS

- Lumens: high flashlight-200, medium flashlight-100, low flashlight-60, high floodlight-200, medium floodlight-100 survival floodlight 20, Dual-Light™ -200
- Run-time: high flashlight-6 hrs, medium flashlight-11 hrs 30 min, low flashlight-22 hrs 30 min, high floodlight-6 hrs, medium floodlight-11 hrs 30 min, survival floodlight-30 hrs, Dual-Light™ -6 hrs
- Beam distance: 267 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8in, weight: 13.7oz

FL1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>200</b> LUMENS	<b>100</b> LUMENS	<b>60</b> LUMENS
	<b>8h</b>	<b>6h</b>	<b>11h</b>	<b>22h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>
				

Model	UPC 0 17398
XPR-5572G	80457 8

## SAFETY RATING

### Permissible Nightstick XPR-5572 Flashlight/Floodlight

MSHA APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

**WARNINGS:** Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.

Ex Ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C



High-efficiency deep parabolic reflector

Wide-beam floodlight

Heavy-duty stainless-steel pocket clip

Wall or vehicle mounted charger

# Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base - Rechargeable

This Rechargeable XPR-5572RM Intrinsically Safe Permissible Multi-Function Dual-Light™ Angle Light w/ Multi-Angle Magnetic Base is cULus and MSHA certified Intrinsically Safe Permissible. This is a Flashlight, a Floodlight and a Dual-Light Angle Light all in one super rugged design. The flashlight setting offers 3 user-selectable brightness settings of high, medium and low, plus a strobe feature. The beam distance rating on the flashlight's high-brightness setting is 267 meters (more than 875 feet) thanks to the high-efficiency deep parabolic reflector. This ultra-tight beam is perfect for cutting through smoke and lighting up objects at great distances. The 5572RM had two additional features that don't exist in any competitive product. First is the Floodlight, with its own 3 user-selectable brightness settings of high, medium and low, the floodlight is outstanding at lighting up objects in the immediate vicinity. The low-brightness floodlight setting, "Survival Mode", provides just enough light in an emergency situation with an impressive run-time of 30 hours. Plus, the 5572RM utilizes Nightstick's exclusive Dual-Light mode... the ability to turn on the flashlight and the floodlight at the same time. With this setting, the user can simultaneously see objects at a distance or through the smoke, as well as see the ground in front of them as they walk or work. The included Multi-Angle Magnetic Base allows the light to slide and lock into place giving it an additional level of functionality. The powerful Rare-earth Magnet with its rubber protective covering attaches to virtually any ferrous metal surface. The single point locking lever can be used in conjunction with the gimbal head to focus the light exactly where it's needed. Power comes from a rechargeable Lithium-ion battery.

**INTRINSICALLY SAFE  
PERMISSIBLE**



TECHNOLOGY

XPP-5572RM



**200** Flashlight  
Lumens

**200** Floodlight  
Lumens

**200** Dual-Light™  
Lumens




## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Flashlight/Floodlight/Dual-Light™
- 3 User-selectable brightness settings on the Flashlight plus a strobe
- High-efficiency deep parabolic reflector creating a sharp focused flashlight beam
- 3 User-selectable brightness setting on the Floodlight including a 20 Lumen Survival Mode
- Dual-light (both the flashlight & floodlight on at the same time) provides for maximum lighting versatility and user safety
- Glass-filled Nylon Polymer housing
- Dual body switches
- Heavy-duty stainless-steel pocket clip
- Battery charge status indicator (for use only with rechargeable battery)
- Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head
- Waterproof
- Impact & chemical resistant
- Light (w/o magnetic base) meets the requirements of NFPA-1971-8.6 (2013)
- Charger meets the requirements of NFPA-1901 (2009) mounted in any position
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery pack (included)
- Can also be powered by 6 AA batteries (not included) using the AA Battery Carrier (included)
- Limited Lifetime Warranty\*

## XPP-5572RM SPECIFICATIONS

- Lumens: high flashlight-200, medium flashlight-100, low flashlight-60, high floodlight-200, medium floodlight-100 survival floodlight 20, Dual-Light™ -200
- Run-time: high flashlight-6 hrs, medium flashlight-11 hrs 30 min, low flashlight-22 hrs 30 min, high floodlight-6 hrs, medium floodlight-11 hrs 30 min, survival floodlight-30 hrs, Dual-Light™ -6 hrs
- Beam distance: 267 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 7.6in, width: 3.2in, depth: 3in, bezel diameter: 2.8in, weight: 24.9oz w/ magnetic base

FL 1 STANDARD	DUAL-LIGHT	HIGH	MEDIUM	LOW
	<b>200 LUMENS</b>	<b>200 LUMENS</b>	<b>100 LUMENS</b>	<b>60 LUMENS</b>
	<b>8h</b>	<b>6h</b>	<b>11h</b>	<b>22h</b>
	<b>235m</b>	<b>267m</b>	<b>199m</b>	<b>145m</b>
	<b>13836cd</b>	<b>22249cd</b>	<b>14828cd</b>	<b>7790cd</b>



Model	UPC 0 17398
XPR-5572RM	80466 0

## SAFETY RATING

### Permissible Nightstick XPR-5572 Flashlight/Floodlight

MSHA

APPROVAL No. 20-A150005-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: Do not charge in hazardous location. MSHA approved for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries. Replace the Battery Pack in fresh air only. Do not mix batteries from different manufacturers or different types. Battery Pack to be replaced by a qualified technician only. The Model Nightstick 5572 must not be opened in areas where permissibility is required. Substitution of components may impair Intrinsic Safety.



Ex Ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS

UL listed for use with Bayco Li-ion Battery Pack 5572-BATT or Primary 5570-BATT Battery Pack containing 6 AA Energizer Type EN91 or L91 batteries.

CLASS I DIV I GRPS A-D T3  
CLASS II & III DIV I GRPS E-G  
CLASS I ZONE 0 Group IIC T3  
CLASS II ZONE 20 Group IIIC T3  
-20°C ≤ Tamb ≤ +70°C



High-efficiency deep parabolic reflector



Wide-beam floodlight



Heavy-duty stainless-steel pocket clip



Wall or vehicle mounted charge



Multi-Angle Magnetic Base w/ powerful Rare-earth Magnet and locking gimbal head





# Professional Lighting and Cord Solutions



# 2016





## ***INNOVATION AT WORK***

For more than 30 years, Bayco's family of products have been the preferred choice of professionals.

Bayco's dedicated engineering teams continually seek out innovative product solutions that focus on maximizing user safety and exceptional day-to-day utility.

The 110,000 square foot Texas facility is the international headquarters for Bayco's research and development, marketing, sales and distribution. Bayco has dedicated sales offices and manufacturing in the USA and abroad.





**LED Lights**



**Fluorescent Lights**



**Halogen Lights**



**Incandescent Lights**



**Cord Management & Reels**



**Extension Cords**



**Booster Cables**



**Replacement Parts**

### SL-2135

1,200 Lumens

Page 5



Magnetic Hook

### SL-866

1,200 Lumens

Page 5



Magnetic Hook

### 2-in-1 LED Rechargeable Work Light with Spotlight in Handle



Part No	UPC 0 17398	Floodlight Lumens (Run-Time hrs)	Spotlight Lumens (Run-Time hrs)	Case Qty	Case Wt (lbs)	Pkg
SLR-2166	80025 9	60 LED 120 L (4)	6 LED 12 L (18)	2	2.8	Clamshell

- Bright LEDs, 35,000 hour life
- Impact, moisture and chemical resistant
- Rechargeable NiMH battery
- Heavy-duty rocker switch
- Magnet in body & top, includes hook for hands-free lighting
- Home and car chargers included
- Charge time 8hrs
- 1 year warranty
- Length: 14.3in

### Corded LED Work Light



Part No	UPC 0 17398	Floodlight Lumens	Cord Length (ft)	Cord Gauge	Cord Jacket	Case Qty	Case Wt (lbs)	Pkg
BA-2116	80081 5	60 LED 120 L	6	18/2	SJT	2	2.4	Clamshell
SL-2125	80121 8	60 LED 120 L	25	18/2	SJT	2	8.4	Clamshell

- Bright LEDs, 35,000 hour life
- Impact and chemical resistant
- Heavy-duty rocker switch
- Magnet in body & top and hook for hands-free lighting
- 1 year warranty
- Work light length: 14.3in

### 60 LED Work Light on Metal Reel with 50ft Cord



Part No	UPC 0 17398	Floodlight Lumens	Cord Length (ft)	Cord Gauge	Cord Jacket	Case Qty	Case Wt (lbs)	Pkg
SL-864	80109 6	60 LED 120 L	50	18/2	SVT	2	18.4	Box

- Bright LEDs, 35,000 hour life
- Impact and chemical resistant
- Heavy-duty rocker switch
- Heavy-duty retractable metal reel
- Magnet in body & top and hook for hands-free lighting
- Mounting bracket included
- Adjustable cord stop
- 1 year warranty
- Work light length: 14.3in

### 1200 Lumen Coded LED Work Light w/ Magnetic Hook

Part No	UPC 0 17398	Floodlight Lumens	Cord Length (ft)	Cord Gauge	Cord Jacket	Case Qty	Case Wt (lbs)	Pkg
SL-2135	80494 3	1200 L	25	18/2	SJT	2	8.4	Clamshell



- Two brightness settings: 1,200 & 600 Lumens
- Octagonal body design keeps the light in place when laid on its side
- Magnet in body & top and hook for hands-free lighting
- 25' 18/2 SJT cord
- Impact and chemical resistant
- 1 year warranty

### 1200 Lumen LED Work Light w/ Magnetic Hook on Retractable Reel

Part No	UPC 0 17398	Floodlight Lumens	Cord Length (ft)	Cord Gauge	Cord Jacket	Case Qty	Case Wt (lbs)	Pkg
SL-866	80495 0	1200 L	50	18/2	SVT	2	18.4	Box



- Two brightness settings: 1,200 & 600 Lumens
- Octagonal body design keeps the light in place when laid on its side
- Magnet in body & top and hook for hands-free lighting
- 50' 18/2 SVT cord inside of a retractable metal reel
- Impact and chemical resistant
- 1 year warranty

### Emergency Area Light / Under Hood Work Light - Rechargeable

Part No	UPC 0 17398	Lumens (Run-Time hrs)		Case Qty	Case Wt (lbs)	Pkg
		Full Power	Half Power			
SLR-2120	80172 0	1200 L (4.5)	650 L (8.5)	1	8.8	Box

- All LED design with two brightness modes - full-power & half-power
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each & integrated hook for added hands-free functionality
- Light bar handles pivot up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Li-ion battery
- Includes AC & DC power supply



### SL-1514

Page 6



2,200 Lumens

Single 20W LED  
w/ Magnetic Base

### SL-1522

Page 7



4,400 Lumens

Dual 20W LEDs  
6 Ft. Tripod



### 950 Lumen LED Single Fixture Work Light w/ Magnetic Base

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1504	80514 8	2	9	12	18/3	SVT	Box

- Single light fixture producing 950 Lumens of light from a single 10W LED
- Multi-angle tilt and swivel fixture design
- Comfort-grip padded handle
- Single sealed push button switch
- 12 ft. SVT 18/3 cord with grounded plug



### 2,200 Lumen LED Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1512	80445 5	2	8.25	6	18/3	SVT	Box

- Single light fixture producing 2,200 Lumens of light from a single 20W LED
- Multi-angle tilt and swivel fixture design
- Comfort-grip padded handle
- Single sealed push button switch
- 6 ft. SVT 18/3 cord with grounded plug



### 2,200 Lumen LED Single Fixture Work Light w/ Magnetic Base

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1514	80446 2	2	9	12	18/3	SVT	Box

- Single light fixture producing 2,200 Lumens of light from a single 20W LED
- Powerful magnetic base for hands-free operation
- Multi-angle tilt and swivel fixture design
- Comfort-grip padded handle
- Single sealed push button switch
- 12 ft. SVT 18/3 cord with grounded plug

### 4,400 Lumen LED Dual Fixture Work Light on Tripod Stand



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1522	80447 9	1	15.25	6	18/3	SVT	Box

- Dual light fixtures mounted on a 6' tripod stand, each using a single 20W LED producing 2,200 lumens of light for a combined illumination of 4,400 lumens
- Each light fixture can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 6 feet high
- Multi-angle tilt and swivel fixture design
- Comfort-grip padded handles
- Each fixture has its own sealed push button switch
- 6 ft. SVT 18/3 cord with grounded plug
- Integrated cord storage hooks on one of the tripod legs for cord storage

### 10,000 Lumen LED Dual Fixture Work Light on Tripod Stand



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1530	80550 6	1	28	12	18/3	SJTW	Box

- Dual light fixtures mounted on a 8' tripod stand, each using two 50W LED's producing 5,000 lumens of light for a combined illumination of 10,000 lumens
- Each light fixture can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 8 feet high
- Multi-angle tilt and swivel fixture design
- Comfort-grip padded handles
- Each fixture has its own sealed push button switch
- 12 ft. SJTW 18/3 cord with grounded plug
- Integrated cord storage hooks on one of the tripod legs for cord storage

## Fluorescent Lights

**SL-976**

Page 7



**26w**

25ft Cord  
Stand-up Base  
Integrated Single Outlet

**SL-975**

Page 7



**26w**

25ft Cord  
Integrated Single Outlet

**SL-936**

Page 8




**13w**

25ft Cord  
Integrated Single Outlet

**SL-825**

Page 12

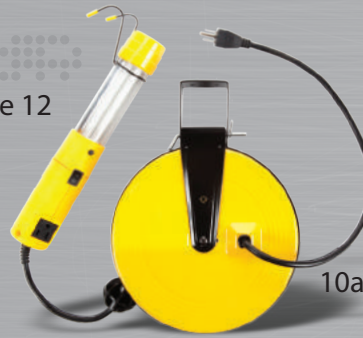

**13w**

40ft Metal Reel  
10amp Single Outlet  
Utility Light

**SL-8908**

Page 11



**26w**

50ft Reel  
12amp Single Outlet  
Utility Light



## Fluorescent Lights

### 26w Fluorescent Work Light w/ Single Outlet & Double Hook

Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-976	Black	10976 5	6	19	25	16/3	SJT	4 Color Wrapper
SL-926	Yellow	101578	6	10.5	6	16/3	SJT	4 Color Wrapper

- Two cool running 13w fluorescent bulbs rated at 10,000 hours
- Similar amount of light to a 125w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Electronic ballast provides instant no flicker cold weather starts
- Retractable & removable nylon-tipped double hook that can rotate 360 degrees
- Dual body rocker switches



### 18w Fluorescent Work Light w/ Single Outlet & Double Hook

Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-918	Yellow	10119 6	6	10	6	16/3	SJT	4 Color Wrapper

- Two cool running 9w fluorescent bulbs rated at 10,000 hours
- Similar amount of light to a 100w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Electronic ballast provides instant no flicker cold weather starts
- Retractable & removable nylon-tipped double hook that can rotate 360 degrees
- Single body rocker switch



### 26w Fluorescent Work Light w/ Single Outlet & Dual Swivel Hooks

Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-975	Black	10130 1	6	18.4	25	16/3	SJT	4 Color Wrapper
SL-908	Yellow	10122 6	6	10.3	6	16/3	SJT	4 Color Wrapper
SL-908PDQ4	Yellow	10122 6	4	7.3	6	16/3	SJT	Counter Top Display

- Two cool running 13w fluorescent bulbs rated at 10,000 hours
- Similar amount of light to a 125w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Dual integrated swivel hooks for hands-free use
- Dual body rocker switches



## Fluorescent Lights

### 13w Fluorescent Work Light w/ Single Outlet & 25ft Extension Cord



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-920C	10169 1	6	24.8	6 & 25	16/3	SJT	Clamshell

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Floodlight and a spotlight
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Nylon double hooks for hands-free use
- Single body rocker switch
- Extension cord has a single male plug and single female outlet

SL-936 Shown

### 13w Fluorescent Work Light w/Spotlight & Single Outlet



Spot Work Light in Top



Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-936	Black	10188 2	4	22	50	16/3	SJT	4 Color Box
SL-935	Black	10187 5	6	18.4	25	16/3	SJT	4 Color Wrapper
SL-935PDQ4	Black	10187 5	4	12.4	25	16/3	SJT	Counter Top Display
SL-907	Yellow	10121 9	6	10.6	6	16/3	SJT	4 Color Wrapper
SL-907PDQ4	Yellow	10121 9	4	7.2	6	16/3	SJT	Counter Top Display

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Floodlight and a spotlight
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tipped double hooks for hands-free use
- Single body rocker switch

SL-520 Shown

### 13w Fluorescent Work Light w/ Spotlight



Spot Work Light in Top



Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-550	Black	10131 8	6	22.4	50	18/2	SJT	Box
SL-520	Black	10010 6	6	14	25	18/2	SJT	4 Color Wrapper
SL-507	Yellow	10120 2	6	8.8	6	18/2	SJT	4 Color Wrapper

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tipped double hooks for hands-free use
- Single body rocker switch

### 13w Fluorescent Work Light w/ Spotlight

Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-677	Yellow	10103 5	6	25	50	18/2	SJT	Box
SL-676	Yellow	10102 8	6	17.2	25	18/2	SJT	Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75watt incandescent bulb but with a daylight color (7000 Kelvin)
- Floodlight and a spotlight
- Nylon tipped double hooks for hands-free use
- Ballast enclosed near plug end of cord
- Single sealed push button on bottom

OSHA NRTL Compliant



### 15w Fluorescent Long Tube Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-623	10084 7	4	12.4	25	18/2	SJT	Box

- Cool running 15w long tube fluorescent bulb rated at 7,000 hours of use (5000 Kelvin)
- Extra-long 17in high-impact lamp protector w/reflector
- Single plastic swivel hook at one end and a pair of multi-rotational hooks create lots of hands-free uses
- Two switches: Rocker switch to turn unit on/off, and a manual starter switch



### 13w Fluorescent Work Light w/ Single Outlet & Dual Swivel Hooks

Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-964	Black	10185 1	6	18.4	25	16/3	SJT	4 Color Wrapper
SL-904	Yellow	10223 0	6	10.5	6	16/3	SJT	4 Color Wrapper

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Angled ergonomic handle shape
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Dual integrated swivel hooks for hands-free use
- Single body rocker switch



## Fluorescent Lights

### 13w Fluorescent Work Light w/ Dual Swivel Hooks



Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-563	Black	10076 2	6	14.6	25	18/2	SJT	4 Color Wrapper

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Angled ergonomic handle shape
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Electronic ballast provides instant no flicker cold weather starts
- Dual integrated swivel hooks for hands-free use
- Single body rocker switch

### 12 Volt Fluorescent Emergency / Work Light w/ DC Plug



Part No	Color	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-512	Yellow	10035 9	6	7.1	20	18/2	SPT	4 Color Wrapper

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- 20ft Cord is terminated with a DC plug for use in a vehicle cigarette lighter or DC outlet
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tip double hooks for hands-free use
- Single body rocker switch

### 13w Fluorescent Rechargeable Work Light w/ Spotlight

SLR-9010 Shown



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Battery	Includes
SLR-9000CPDQ	34723 5	3	9.1	One single capacity NiMH Battery	Light, one battery, charger and AC/DC power supply
SLR-9010	39010 1	1	6	Two single capacity NiMH Batteries	Light, two batteries, charger, AC/DC power supply and case
SLR-9014	39014 9	1	6.2	Two dual capacity NiMH Batteries	Light, two batteries, charger, AC/DC power supply and case

- Cool running 13 watt fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75 watt incandescent bulb but with a daylight color (7000 Kelvin)
- Acts as both a floodlight and a spotlight
- Ergonomic handle shape makes it a pleasure to hold and use the light
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tipped double hooks for hands-free use

### 13w UV Fluorescent Rechargeable Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Battery	Includes
UVR-9000	29000 5	1	3.2	One single capacity NiMH Battery	Light, one battery, charger and AC/DC power supply
UVR-9012B	29012 8	1	2.9	One dual capacity NiMH Battery	Light, one battery, charger, AC/DC power supply and yellow safety glasses
UVR-9014	29014 2	1	6.3	Two dual capacity NiMH Batteries	Light, two batteries, charger, AC/DC power supply and case
UVR-9014G	29014 2	1	6.5	Two dual capacity NiMH Batteries	Light, two batteries, charger, AC/DC power supply, yellow safety glasses and case



UVR-9000 Shown

- Cool running 13 watt UV fluorescent bulb rated at 10,000 hours of use
- Designed to be used in conjunction with leak detection dye (not included)
- Can be used to detect bodily fluids and mold (no dye required)
- Effective detection range of approximately 2 feet
- Ergonomic handle shape makes it a pleasure to hold and use the light
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tipped double hooks for hands-free use

### 13w UV Fluorescent Leak Detection Light-Corded

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-513	10043 4	6	15.9	25	18/2	SJT	Box



- Cool running 13 watt UV fluorescent bulb rated at 10,000 hours of use
- Designed to be used in conjunction with leak detection dye (not included)
- Can be used to detect bodily fluids and mold (no dye required)
- Effective detection range of approximately 2 feet
- Nylon tipped double hooks for hands-free use

### 26w Fluorescent Work Light w/ Single Outlet on 50ft Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-8908	10094 6	1	18.3	50	14/3	SJT	Box



- Two cool running 13w fluorescent bulbs rated at 10,000 hours of use
- Similar amount of light to a 125w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Dual integrated swivel hooks and removable magnet for hands-free use
- Dual body rocker switches
- Attached to a 50ft retractable cord inside of a heavy-duty polymer reel
- Integrated 13amp circuit breaker built into the housing
- Includes mounting brackets for attaching the reel to the wall or ceiling

## Fluorescent Lights

### 13w Fluorescent Work Light / Spotlight w/ Single Outlet on 50ft



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-8907	10064 9	1	17.2	50	14/3	SJT	Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tipped double hooks and removable magnet for hands-free use
- Single body rocker switch
- Attached to a 50ft retractable cord inside of a heavy-duty polymer reel
- Integrated 13amp circuit breaker built into the housing
- Includes mounting brackets for attaching the reel to the wall or ceiling

### 26w Fluorescent Work Light w/ Single Outlet on 40ft Metal Reel



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-875	10318 3	4	45.9	40	16/3	SJT	Box

- Two cool running 13w fluorescent bulbs rated at 10,000 hours of use
- Similar amount of light to a 125w incandescent bulb but with a daylight color (7000 Kelvin)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Electronic ballast provides instant no flicker cold weather starts
- Dual integrated swivel hooks for hands-free use
- Dual body rocker switches
- Attached to a 40ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling

### 13w Fluorescent Work Light / Spotlight w/ Single Outlet on 40ft Metal Reel



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-825	10078 6	4	42.1	40	16/3	SJT	4 Color Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Floodlight and a spotlight
- Built in single grounded outlet (10amp)
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tip double hooks for hands-free use
- Single body rocker switch
- Attached to a 40ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling

### 13w Fluorescent Work Light on 50ft Metal Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-826	10019 9	4	37.7	50	18/2	SVT	4 Color Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tip double hooks for hands-free use
- Single body rocker switch
- Attached to a 50ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



### 13w Fluorescent Work Light on 50ft Metal Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-827	10257 5	4	40.8	50	18/2	SVT	4 Color Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Ballast enclosed near end of plug
- Nylon tip double hooks for hands-free use
- Single sealed push button on bottom
- Attached to a 50ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling

OSHA NRTL Compliant



### 13w Fluorescent Work Light w/ Single Outlet & Dual Swivel Hooks on 40ft Metal Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-821	10226 1	4	42	40	16/3	SJT	4 Color Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Angled ergonomic handle shape
- Dual integrated swivel hooks for hands-free use
- Single body rocker switch
- Attached to a 40ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



### 13w Fluorescent Work Light on 20ft Retractable Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-651	10124 0	6	23.9	20	18/2	SVT	4 Color Box

- Cool running 13w fluorescent bulb rated at 10,000 hours of use
- Similar amount of light to a 75w incandescent bulb but with a daylight color (7000 Kelvin)
- Electronic ballast provides instant no flicker cold weather starts
- Nylon tip double hooks for hands-free use
- Single body rocker switch
- Attached to a 20ft retractable cord inside of a polyethylene reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



## Halogen Lights

### SL-1002

500w

Page 15



### SL-1032

600w


Page 17



### SL-1005

1000w

Page 15



6ft Adjustable Tripod

### SL-1082

1500w

Page 16




8ft Adjustable Tripod



### 1000w Convertible Halogen Dual Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1005	21005 8	2	23.9	6	18/3	SJTW	4 Color Box

- Dual light fixtures that can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 6 feet high
- Each fixture uses a single 500w halogen bulb (included) for a total illumination of 1,000w
- Each fixture has its own sealed push button switch
- Choice of lighting output: 500 or 1,000w
- Tempered glass lenses and metal safety grills are used for additional protection from the bulbs
- Powder coated for long wear
- Includes a spare 500w bulb in a protective bulb holder

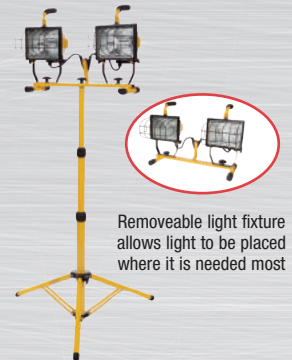

### 500w Convertible Halogen Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1022	21022 5	6	40.3	6	18/3	SJTW	4 Color Box

- Single light fixture producing 500w of light (500w bulb is included)
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the light up to 40 inches high
- Fixture uses a sealed rocker switch
- Tempered glass lens and metal safety grill is used for additional protection from the bulb
- Powder coated for long wear



### 500w Halogen Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1002	21002 7	6	20.8	3	18/3	SJTW	4 Color Box

- Single light fixture producing 500w of light (500w bulb is included)
- Tempered glass lens and metal safety grill are used for additional protection from the bulb
- Powder coated for long wear
- Includes a spare 500w bulb in a protective bulb holder



## Halogen Lights

### 1000w Convertible Halogen Dual Fixture Work Light



Removeable light fixture allows light to be placed where it is needed most

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1006	21006 5	2	43.6	6	18/3	SJTW	4 Color Box

- Dual light fixtures that can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 6 feet high
- Each fixture uses a single 500w halogen bulb (included) for a total illumination of 1,000w
- Each fixture has its own sealed push button switch
- Choice of lighting output: 500 or 1,000w
- Tempered glass lenses and metal safety grills are used for additional protection from the bulbs
- Powder coated for long wear
- Adjustable leg for uneven surfaces
- Includes a spare 500w bulb in a protective bulb holder

### 500w Halogen Single Fixture Work Light



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1003	21003 4	4	19.5	5	18/3	SJTW	4 Color Box

- Single light fixture producing 500w of light (500w bulb is included)
- Fixture uses a sealed push button switch
- Tempered glass lens and metal safety grill are used for additional protection from the bulb
- Powder coated for long wear
- Includes a spare 500w bulb in a protective bulb holder

### 1500w Convertible Halogen Dual Fixture Work Light



Removeable light fixture allows light to be placed where it is needed most

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1082	21082 9	1	29.2	10	16/3	SJTW	4 Color Box

- Dual light fixtures that can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 8 feet high
- Each fixture has a 250w and a 500w halogen bulb (included) for a total illumination of 1,500w
- Each bulb is controlled by its own sealed push button switch
- Choice of lighting output: 250, 500, 750, 1,000, 1,250 or 1,500w
- Tempered glass lenses and metal safety grills are used for additional protection from the bulbs
- Powder coated for long wear
- Includes a spare 500w bulb in a protective bulb holder

### 750w Convertible Halogen Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1075	21075 1	1	20.4	10	16/3	SJTW	4 Color Box

- Single light fixture has two bulbs, a 250w & a 500w producing a total of 750w of light (bulbs are included)
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the light up to 7 feet high
- Each bulb is controlled by its own sealed push button switch
- Choice of lighting output: 250, 500 or 750w
- Tempered glass lens and metal safety grill is used for additional protection from the bulb
- Powder coated for long wear
- Adjustable leg for uneven surfaces
- Includes a spare 500w bulb in a protective bulb holder



Removeable light fixture allows light to be placed where it is needed most

### 750w Halogen Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1042	21042 3	1	10	6	16/3	SJTW	4 Color Box

- Single light fixture has two bulbs, a 250w & a 500w producing a total of 750w of light (bulbs are included)
- Each bulb is individually controlled by a pair of sealed push button switches
- Choice of lighting output: 250, 500 or 750w
- Tempered glass lens and metal safety grill are used for additional protection from the bulbs
- Powder coated for long wear
- Includes a spare 500w bulb in a protective bulb holder



### 1200w Convertible Halogen Dual Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1062	21062 1	2	46.3	8	18/3	SJTW	4 Color Box

- Dual light fixtures that can be pointed in different directions for maximum lighting
- Light fixture base unit can be removed from tripod stand for low angle illumination
- The tripod stand will extend the lights up to 7 feet high
- Each fixture uses a pair of 300w halogen bulbs (included) for a total illumination of 1,200w
- Each bulb is controlled by its own sealed push button switch
- Choice of lighting output: 300, 600, 900 or 1,200w
- Tempered glass lenses and metal safety grills are used for additional protection from the bulbs
- Powder coated for long wear
- Adjustable leg for uneven surfaces
- Includes a spare 300w bulb in a protective bulb holder



Removeable light fixture allows light to be placed where it is needed most

### 600w Halogen Single Fixture Work Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-1032	21032 4	2	10.9	6	18/3	SJTW	4 Color Box

- Single light fixture has two 300w bulbs producing a total of 600w of light (bulbs are included)
- Each bulb is individually controlled by a pair of sealed push button switches
- Choice of lighting output: 300 or 600w
- Tempered glass lens and metal safety grill are used for additional protection from the bulbs
- Powder coated for long wear
- Includes a spare 300w bulb in a protective bulb holder



## Incandescent Lights

### SL-426A

Page 20



75w

50ft Cord  
Receptacle

### SL-412

Page 21



12v

20ft Cord with Clips

### SL-302B3

Page 20



300w

6ft Cord  
10½in Brooder Light

### SL-840

Page 21



75w

40ft Metal Reel  
10amp Receptacle  
Utility Light

## Incandescent Lights

### 5½in Clamp Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-201PDQ6	34702 0	6	4.7	6	18/2	SPT-2	Counter Top Display

- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Spring steel clamp w/scratch resistant vinyl sleeve
- Push button switch



### 8½in Clamp Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-300N4	34703 7	4	3.9	6	18/2	SPT-2	4 Color Box
SL-300PDQ6	34703 7	6	5.3	6	18/2	SPT-2	Counter Top Display

- Rated to handle up to a 150w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Spring steel clamp w/scratch resistant vinyl sleeve
- Push button switch



### 8½in Clamp Light w/Grip-Tite Super Clamp

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-301	34704 4	6	7.5	6	18/2	SPT-2	4 Color Box

- Rated to handle up to a 150w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Grip-Tite Super Clamp w/scratch resistant vinyl sleeve
- Push button switch



### 10½in Clamp Light

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-310B4	34706 8	4	7.5	6	18/2	SPT-2	4 Color Box

- Lights 50% more area than a standard 8½ in clamp light
- Rated to handle up to a 200w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Spring steel clamp w/scratch resistant vinyl sleeve
- Push button switch



### 10½in Clamp Light w/Grip-Tite Super Clamp


Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-311B4	34708 2	4	5.8	6	18/2	SPT-2	4 Color Box

- Lights 50% more area than a standard 8½ in clamp light
- Rated to handle up to a 200w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Grip-Tite spring clamp w/scratch resistant vinyl sleeve
- Push button switch



## Incandescent Lights

### 10½in Brooder Clamp Light w/Porcelain Ceramic Socket



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-302B3	34705 1	3	5.4	6	18/2	SJT	4 Color Box

- Lights 50% more area than a standard 8½ in clamp light
- Rated at up to 50% more wattage than a standard 8½ in clamp light
- Rated to handle up to a 300w incandescent bulb (bulb not included)
- Adjustable ball joint for easy positioning
- Spring steel clamp w/scratch resistant vinyl sleeve
- Porcelain ceramic socket

### Incandescent Work Light w/ Metal Guard & Single Outlet



Grounded Outlet

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-426A	10147 9	6	26	50	16/3	SJT	4 Color Wrapper
SL-425A	10132 5	6	15	25	16/3	SJT	4 Color Wrapper

- Metal bulb guard with integrated hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Ergonomic handle shape
- Built in single grounded outlet (12amp)
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Push button switch

### Incandescent Work Light w/ Metal Guard



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-426	10071 7	6	22.5	50	18/3	SJT	4 Color Wrapper
SL-425	10070 0	6	13.7	25	18/3	SJT	4 Color Wrapper

- Metal bulb guard with integrated hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Ergonomic handle shape
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Push button switch

### Incandescent Work Light w/ Non-Metallic Guard



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-421	10146 2	6	10	25	18/2	SJT	4 Color Wrapper
SL-406	10145 5	6	4.7	6	18/2	SJT	4 Color Wrapper

- Non-metallic bulb guard with integrated swivel hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Ergonomic handle shape
- Exclusive 90 degree cord swivel makes it possible to stand the light upright on its base
- Push button switch

### 12 Volt Incandescent Work Light w/ Non-Metallic Guard & Battery Clips

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-412	10095 3	6	7	20	18/2	SPT	4 Color Wrapper

- Non-metallic bulb guard with integrated swivel hook
- Includes a 50w "Rough Service" incandescent bulb
- Cord is terminated with a positive and negative set of battery clips
- Push button switch



### Incandescent Work Light w/ Metal Guard & Single Outlet on 40ft Metal Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-840	10181 3	4	40.4	40	16/3	SJT	Box

- Metal bulb guard with integrated rubber-tipped hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Built in single grounded outlet (10amp)
- Push button switch
- Attached to a 40ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



### Incandescent Work Light w/ Metal Guard on 50ft Metal Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-851	10127 1	4	37.9	50	18/3	SVT	Box

- Metal bulb guard with integrated rubber-tipped hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Push button switch
- Attached to a 50ft retractable cord inside of a metal reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



### Incandescent Work Light w/ Metal Guard & Single Outlet on 20ft Reel

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-450	10002 1	6	23.3	20	18/3	SVT	Box

- Metal bulb guard with integrated rubber-tipped hook
- Rated to handle up to a 75w incandescent bulb (bulb not included)
- Built in single grounded outlet (7amp)
- Attached to 20ft retractable cord inside of polyethylene reel
- Includes mounting brackets for attaching the reel to the wall or ceiling



### 100ft String Light w/ Non-Metallic Lamp Guards (10 Lights)

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-7408	07408 7	1	12.8	100	14/2	SJTW - 15A Rated	1 Color Box

OSHA NRTL Compliant



## Cord Management & Reels

### SL-8904

Page 26



50ft

15amp  
Four Outlets  
Circuit Breaker  
Polymer Reel

### SL-8906

Page 26



50ft

15amp  
All-Weather Cord  
Four Outlets  
Circuit Breaker  
Polymer Reel

### SL-801

Page 25



30ft

13amp  
Three Outlets  
Metal Reel

### SL-800

Page 25



30ft

10amp  
Three Outlets  
Metal Reel




## Cord Management & Reels

### Cord Lock

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
K-205	34710 5	12	1.5	Card

- Easily connects & locks extensions cords together
- Keeps plug connection in place safely and easily




### Carry Strap

Part No	Strap Length	Cord Storage	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
K-175	14in	100ft 14/3	34571 2	30	5.4	4 Color Wrapper
K-178	22in	150ft 16/3	34178 3	12	3.4	4 Color Wrapper



### Cord Wrap

Part No	Cord Storage	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
K-150	150ft 16/3	34568 2	24	6	4 Color Wrapper




### Cord Storage Reel w/ Center Spin Handle

Part No	Cord Storage	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
KW-110	100ft 16/3 • 75ft 14/3 • 50ft 12/3	34566 8	6	7.7	4 Color Wrapper
KW-130	150ft 16/3 • 125ft 14/3 • 100ft 12/3	34573 6	6	8.3	4 Color Wrapper



### Hand-Crank Cord Storage Reel w/ Stand

Part No	Cord Storage	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
K-100	150ft 16/3 • 125ft 14/3 • 100ft 12/3	34567 5	6	10.4	4 Color Wrapper



## Cord Management & Reels

### Cord Storage Reel w/4 Outlets & Resettable 15amp Circuit Breaker



Part No	Cord Storage	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-2000PDQ	100ft 16/3 • 100ft 14/3 • 75ft 12/3	32000 9	4	14.6	4 Color Wrapper

- Holds up to 100ft of 14/16 gauge or 75ft of 12 gauge extension cord
- Four grounded outlets
- Resettable 15amp circuit breaker
- Works with most single outlet extension cords
- Plug the female end of extension cord into the center core plug and then wind up cord
- Side-mounted handle makes rolling up the cord quick and simple
- Wide steel base keeps the cord storage reel stable
- Constructed of shatter and temperature resistant polypropylene for long life

### 25ft Cord Reel w/ Integrated Cord & 4 Outlets



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-755	10165 3	4	14.6	25	16/3	SJT	4 Color Wrapper

- Manual cord reel with 25ft of integrated extension cord
- Compact size with carry handle
- Four grounded outlets
- 10amp rating
- Resettable circuit breaker
- Constructed of impact resistant ABS

### OSHA NRTL Compliant

### 20ft Retractable Polyethylene Cord Reel



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
FL-700	10006 9	6	19.99	20	18/3	SVT	4 Color Box

- OSHA NRTL Compliant
- 20 cord on a retractable polyethylene reel
- Integrated 7amp circuit breaker built into the housing
- Single female outlet
- Includes mounting brackets for attaching the reel to the wall or ceiling

### 30ft Retractable Metal Cord Reel w/ 3 Outlets & Circuit Breaker

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
CA-800B2	34585 9	2	16.6	30	16/3	SJT	Box

- Retractable cord reel with 30ft of integrated extension cord
- Three grounded outlets
- LED power status light on outlet bar
- Adjustable cord stop
- 10amp rating
- Integrated resettable circuit breaker
- Includes mounting brackets to attach the reel to the wall or ceiling

**With Power Status Light**



### 30ft Retractable Metal Cord Reel w/ 3 Outlets - 10amp

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-800	10018 2	4	33	30	16/3	SJT	Box

- Retractable metal cord reel with 30ft of integrated extension cord
- Three grounded outlets
- LED power status light on outlet bar
- Adjustable cord stop
- 10amp rating
- Includes mounting brackets to attach the reel to the wall or ceiling

**With Power Status Light**



### 30ft Retractable Metal Cord Reel w/ 3 Outlets - 13amp

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-801	10081 6	4	36.6	30	14/3	SJT	Box

- Retractable metal cord reel with 30ft of integrated extension cord
- Three grounded outlets
- LED power status light on outlet bar
- Adjustable cord stop
- 13amp rating
- Includes mounting brackets to attach the reel to the wall or ceiling

**With Power Status Light**



## Cord Management & Reels

### 50ft Retractable Polymer Cord Reel w/ 3 Outlets - 13amp



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-8903	10039 7	1	16.7	50	14/3	SJTW	Box

- Retractable polymer cord reel with 50ft of integrated extension cord
- Three grounded outlets
- Integrated 13amp circuit breaker built into the plug
- LED power status light on outlet bar
- Adjustable cord stop
- Includes mounting brackets for attaching the reel to the wall or ceiling

**With Power Status Light**

### Retractable Polymer Cord Reel w/ 4 Outlets - 15amp



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-8904	10055 7	1	18.4	50	12/3	SJTW	Box
SL-8904-40	18904 0	1	17.5	40	12/3	SJTW	Box

- Retractable polymer cord reel with integrated extension cord
- Four grounded outlets
- Integrated 15amp circuit breaker built into the plug
- LED power status light on outlet bar
- Adjustable cord stop
- Includes mounting brackets for attaching the reel to the wall or ceiling

**With Power Status Light**

### 50ft Retractable Polymer Cord Reel w/ All-Weather Cord



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-8906	80159 1	1	19.4	50	12/3	SJEOW	Box


- 50' of 12/3 SJEOW cord on a retractable polymer reel
- More flexible, oil resistant, all weather cord jacket
- Will stay flexible even in cold weather (down to 0 degrees F)
- Smooth glide retractable reel with a stronger spring for improved cord retraction
- Polarized plug with 4 outlet block
- LED power status light on outlet bar
- Resettable 15 amp circuit breaker
- Includes mounting brackets for attaching the reel to the wall or ceiling

**With Power Status Light**

## Extension Cords

**SL-748L**

Page 28

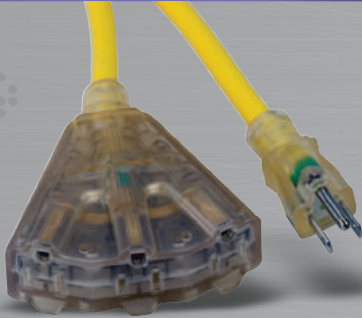


100ft

Lighted Ends-Three Outlets  
15amp

**SL-992**

Page 29




100ft

Lighted Ends-Single Outlet  
10amp

**SL-754L**

Page 28




100ft

Lighted Ends-Single Outlet  
13amp

**SL-9108**

Page 29

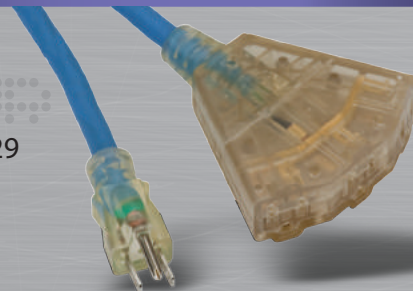

100ft

Lighted Ends-Three Outlets  
15amp

**SL-763**

Page 28




6.5ft

Non-Lighted Three Outlets  
13amp

## Extension Cords

OSHA NRTL Compliant



Temp rating 105°C

### Extension Cord w/Lighted Ends & Single Outlet

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-752L	34729 7	12	30.5	25	14/3	SJTW - 15A Rated	4 Color Wrapper
SL-753L	34730 3	6	30	50	14/3	SJTW - 15A Rated	4 Color Wrapper
SL-754L	34731 0	6	59	100	14/3	SJTW - 13A Rated	4 Color Wrapper
SL-757L	34732 7	4	14.2	25	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-758L	34733 4	2	14.3	50	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-759L	34734 1	2	27.3	100	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-773L	10773 0	2	23.7	50	10/3	SJTW - 15A Rated	4 Color Wrapper
SL-774L	10774 7	1	23.1	100	10/3	SJTW - 15A Rated	4 Color Wrapper

OSHA NRTL Compliant



Temp rating 105°C

### Extension Cord w/Lighted Ends & 3 Outlets

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-735L	10159 2	6	7.6	6	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-740L	10161 5	12	33.8	25	14/3	SJTW - 15A Rated	4 Color Wrapper
SL-741L	10162 2	6	31.3	50	14/3	SJTW - 15A Rated	4 Color Wrapper
SL-745L	10163 9	6	62	100	14/3	SJTW - 13A Rated	4 Color Wrapper
SL-746L	10170 7	4	15.9	25	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-747L	10171 4	2	14.7	50	12/3	SJTW - 15A Rated	4 Color Wrapper
SL-748L	10172 1	2	29.3	100	12/3	SJTW - 15A Rated	4 Color Wrapper

OSHA NRTL Compliant



Temp rating 105°C

### Extension Cord w/Non-Lighted Ends & Single Outlet

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-725	10128 8	18	35	25	16/3	SJTW - 13A Rated	4 Color Wrapper
SL-750	10129 5	12	46.6	50	16/3	SJTW - 13A Rated	4 Color Wrapper
SL-751	10164 6	6	44.5	100	16/3	SJTW - 10A Rated	4 Color Wrapper

OSHA NRTL Compliant



Temp rating 105°C

### Extension Cord w/Non-Lighted Ends & 3 Outlets

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-763	34713 6	12	8.6	6.5ft / 2M	16/3	SJTW - 13A Rated	4 Color Wrapper
SL-764	34714 3	12	11.6	9.8ft / 3M	16/3	SJTW - 13A Rated	4 Color Wrapper
SL-767	34717 4	6	8.6	16.4ft / 5M	16/3	SJTW - 13A Rated	4 Color Wrapper

### All Season Extension Cord w/Lighted Ends & Single Outlet

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-990	34739 6	18	34	25	16/3	SJEOW - 13A Rated	4 Color Wrapper
SL-991	37340 1	12	41.7	50	16/3	SJEOW - 13A Rated	4 Color Wrapper
SL-992	34741 9	6	39	100	16/3	SJEOW - 10A Rated	4 Color Wrapper
SL-993	10114 1	12	29	25	14/3	SJEOW - 15A Rated	4 Color Wrapper
SL-994	10115 8	6	29.6	50	14/3	SJEOW - 15A Rated	4 Color Wrapper
SL-995	34744 0	6	52	100	14/3	SJEOW - 13A Rated	4 Color Wrapper
SL-996	34745 7	4	14.6	25	12/3	SJEOW - 15A Rated	4 Color Wrapper
SL-997	34746 4	2	13.5	50	12/3	SJEOW - 15A Rated	4 Color Wrapper
SL-998	34747 1	2	25.9	100	12/3	SJEOW - 15A Rated	4 Color Wrapper

OSHA NRTL Compliant




Temp rating 105°C



### All Season Extension Cord w/Lighted Ends & 3 Outlets

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-768	34718 1	6	9.4	16.4ft / 5M	16/3	SJEOW - 13A Rated	4 Color Wrapper
SL-9102	09102 2	6	4.4	2	12/3	SJEOW - 15A Rated	4 Color Wrapper
SL-9104	09104 6	6	22.1	25	12/3	SJEOW - 15A Rated	4 Color Wrapper
SL-9106	09106 0	6	41.4	50	12/3	SJEOW - 15A Rated	4 Color Wrapper
SL-9108	09108 4	2	26.1	100	12/3	SJEOW - 15A Rated	4 Color Wrapper

OSHA NRTL Compliant



Temp rating 105°C



### 6 Outlet Power Strip / Surge Protector - 73 Joules of Suppression

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-736	10160 8	10	11	4.5	14/3	SJT	Box



### 9ft Extension Cord w/3 Outlets

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-731	10158 5	36	15.4	9	16/2	SPT-2	Wrapper



### SL-3002

12ft

Page 31




250amp  
Light Duty

### SL-3008

20ft

Page 31

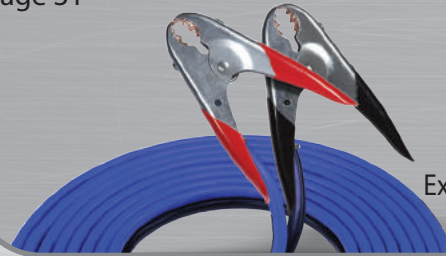

500amp  
Extra Heavy Duty

### SL-3005

16ft

Page 31



400amp  
Medium Duty

### SL-3010

25ft

Page 31




800amp  
Extreme Duty



### Light-Duty 250amp Booster Cable - Side/Top Jaw Design

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-3000	03000 7	12	26	8	10	Red/Black	Wrapper
SL-3001	03001 4	10	27.6	12	10	Red/Black	Wrapper
SL-3002	03002 1	10	33.1	12	8	Yellow/Black	Sleeve

Copper Plated Steel Jaws



### Medium-Duty 400amp Booster Cable - Side/Top Jaw Design

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-3003	03003 8	6	22.9	12	8	Yellow/Black	Storage Bag
SL-3004	03004 5	6	29.9	12	6	Orange/Black	Box
SL-3005	03005 2	6	35	16	6	Orange/Black	Box

Copper Plated Steel Jaws



### Heavy-Duty 400amp Booster Cable - Parrot Jaw Design

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-3006	03006 9	6	49.9	16	4	Blue/Black	Box

Copper Plated Steel Jaws



### Extra Heavy-Duty 500amp Booster Cable - Parrot Jaw Design

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-3008	03008 3	4	40.2	20	4	Blue/Black	Box
SL-3029	03029 8	2	31.9	20	2	Black/Black	Case w/Sleeve
SL-3009	03009 0	2	40.4	25	2	Black/Black	Case w/Sleeve

Copper Plated Steel Jaws



### Extreme-Duty 800amp Booster Cable - Extra Heavy-Duty Jaw Design

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Cord Length (ft)	Cord Gauge	Cord Jacket	Pkg
SL-3010	03010 6	2	47.1	25	1	Red/Black	Case w/Sleeve

Zinc Plated Steel Jaws



## Replacement Parts

### SL-260

Page 33 & 34



Replacement Light Handles

### SL-151

Page 37



Replacement  
Electrical  
Plugs

### SL-100-6

Page 35



Replacement Lamp Guards  
Metal, Non-Metallic

### SL-104

Page 38



Replacement Bulbs  
Fluorescent  
Halogen

### Replacement Fluorescent Head

Fits 651 & 826

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-150	10083 0	6	8.2	Box



### Replacement Fluorescent Head

Fits 827

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-181	10044 1	6	5.2	Box

OSHA NRTL Compliant



### Replacement Fluorescent Head

Fits 825 & 8907

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-200	10097 7	6	8.8	Box



### Replacement Fluorescent Head

Fits 875 & 8908

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-908H	10038 0	1	1.5	Box



### Replacement Fluorescent Head

Fits 821

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-194	10040 3	6	8.8	Box



## Replacement Parts



### Replacement LED Head (includes Magnetic Hook)

Fits 864

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-260	80113 3	6	4.4	Box



### Replacement Incandescent Handle & Switch Assembly

Fits 450 & 840

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-101A	10174 5	6	1.7	Plastic Bag w/Header Card



### Replacement Incandescent Work Light Head w/ Metal Guard & Single Outlet

Fits 450 & 840

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-204	10101 1	6	5.2	Box



### Replacement Tube Assembly

Fits 507, 512, 513, 520, 550, 651, 825, 826, 907, 920C, 935, 936 & 8907

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-202	10099 1	6	1.5	Plastic Bag w/Header Card



### Replacement Tube Assembly

Fits 676, 677 & 827

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-202A	10135 6	6	2.2	Plastic Bag w/Header Card



### Replacement Long Tube Lens for Fluorescent Work Light

Fits 623 & 823

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-623L	10253 7	2	1.2	Bag

### Replacement Lens for 13w, 18w & 26w Fluorescent Work Lights

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg	Fits
SL-904L	10248 3	6	0.9	Plastic Bag w/Header Card	503, 563, 821, 904 & 964
SL-908L	10037 3	6	1.5	Plastic Bag w/Header Card	875, 908, 975 & 8908
SL-918L	10139 4	6	1.8	Plastic Bag w/Header Card	818 & 918
SL-926L	10025 0	6	1.7	Plastic Bag w/Header Card	926 & 976



SL-908L Shown

### Replacement Non-Metallic Lamp Guard

Fits 406, 412 & 421

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-105	10016 8	12	2.9	Plastic Bag w/Header Card



### Replacement Metal Bulb Guard

Fits 425, 425A, 426, 426A, 450, 840 & 851

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-100-6	10013 7	6	2.4	Plastic Bag w/Header Card



### Replacement Non-Metallic Bulb Guard

Fits 7306, 7308, 7406 & 7408 String Lights

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-166	00166 3	20	5.6	Plastic Bag w/Header Card



### Replacement Metal Bulb Guard

Fits 7316 & 7318 String Lights

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-167	00167 0	20	11.2	Plastic Bag w/Header Card



## Replacement Parts

### Magnetic Clips for Work Lights



SL-203B Shown

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg	Fits
SL-203B	10229 2	6	1.4	Plastic Bag w/Header Card	503, 507, 512, 513, 520, 550, 563, 651, 676, 677, 821, 825, 826, 827, 904, 907, 918, 920C, 935, 936, 964, 8907, 9000, 9010 & 9014
SL-203C	10260 5	6	3.8	Plastic Bag w/Header Card	818, 908, 918, 926, 975 & 976
SL-203D	10100 4	6	1.5	Plastic Bag w/Header Card	2105, 2106, 2110, 2112, 2130, 2160, 2530, 2560 & 2590

### Replacement Cradle Bracket for "Under-the-Hood" Work Light Fits 2120



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
2120-BRACKET	80212 3	1	4.6	Box


### Replacement Magnetic Hook



2134-HOOK Shown

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Fits
2134-HOOK	80049 5	1	0.1	2134
2166-HOOK	80050 1	1	0.2	2030, 2116, 2125 & 2166

### Replacement Porcelain Ceramic Socket Fits 302 & 303



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
BA-326	80095 2	6	2.1	Clamshell

### Replacement Tempered Glass Lens for Halogen Light



SL-1002L Shown

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Fits
SL-1002L	31002 4	1	0.7	1002, 1005 & 1022
SL-1006L	80238 3	1	0.8	1003, 1006, 1032 & 1062
SL-1082L	80239 0	1	1.2	1042, 1075 & 1082

### Replacement Yellow Safety Glasses For use with UV Fluorescent Lights



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-113	10030 4	1	0.3	Box

### Replacement Nylon Tipped Double Hook

Fits 507, 512, 513, 520, 550, 651, 676, 677, 825, 826, 827, 907, 920C, 935, 936, 8907 & 9000

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-208	10209 4	6	0.6	Box



### Replacement Jaws for Booster Cables

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-3012	03012 0	12	6	Plastic Bag w/Header card
SL-3013	03013 7	6 Pair	4.1	Plastic Bag w/Header Card
SL-3014	03014 4	12 Pair	10.2	Plastic Bag w/Header Card
SL-3015	03015 1	6 Pair	8	Plastic Bag w/Header Card

Fits 3000, 3001, 3002

**250 Amp**

Fits 3003, 3004, 3005

**400 Amp**

Fits 3006, 3007, 3008, 3009, 3029

**500 Amp**

Fits 3010

**800 Amp**



### Replacement Plug - NEMA 5-15 - Male

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-151	10140 0	6	1	Plastic Bag w/Header Card



### Replacement Plug - NEMA 5-15 - Female

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-152	10141 7	6	1.4	Plastic Bag w/Header Card



### Adapter - Single Grounded Outlet Female to 2 Prong Male - 15amp

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-153	10142 4	6	0.6	Plastic Bag w/Header Card



### Adapter - 3 Outlet Grounded Female to Single Grounded Male Plug - 15amp

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg
SL-154	10143 1	6	2.3	Plastic Bag w/Header Card



## Replacement Parts

### Replacement Battery for 13w Fluorescent Rechargeable Work Light



SLR-9025B Shown

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Fits
SLR-9005C2	34725 9	2	1.6	Single Capacity 9000 & 9010 Series Fluorescent & UV Fluorescent Work Lights
SLR-9025B	39025 5	1	1.2	Dual Capacity 9012 & 9014 Series Fluorescent & UV Fluorescent Work Lights

### Replacement Fluorescent Bulb



SL-103PDQ Shown

Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg	Watts	Fits
SL-229PDQ	10183 7	12	1.6	Clamshell	9	818 & 918
SL-103PDQ	10011 3	12	1.6	Clamshell	13	503, 507, 520, 550, 563, 651, 676, 677, 821, 825, 826, 827, 904, 907, 920C, 935, 936, 964 & 8907
SL-104PDQ	80052 5	12	1.6	Clamshell	26	908, 926, 975, 976 & 8908
SL-213PDQ	10258 2	12	1.5	Clamshell	13	9000 Series White Fluorescent Work Lights
SL-223	10186 8	6	1.5	Box	15	623 & 823

### Replacement UV Fluorescent Bulb



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Fits
SL-129	10090 8	6	0.8	9000 Series UV Fluorescent Work Lights
SL-513-BULB	10045 8	6	0.7	513

### Replacement Halogen Bulb



Part No	UPC 0 17398	Case Qty	Case Wt (lbs)	Pkg	Watts	Fits
SL-209PDQ	10168 4	12	1.1	Clamshell	500	1002, 1003, 1005, 1006, 1022, 1042, 1075 & 1082
SL-217PDQ	10243 8	12	1.3	Clamshell	500	1002, 1003, 1005, 1006, 1022, 1042, 1075 & 1082
SL-225PDQ	10059 5	12	1.2	Clamshell	250	1042, 1075 & 1082
SL-230PDQ	10061 8	12	1.4	Clamshell	300	1032 & 1062



### Replacement Parts Guide

Model Number	Bulb	Handle	Hook	Lamp Guard	Lamp Head	Lens	Magnet
SL-503, SL-563, SL-904, SL-964	SL-103PDQ					SL-904L	SL-203B
SL-507, SL-520, SL-550 SL-907, SL-935, SL-936, SL-920C	SL-103PDQ		SL-208			SL-202	SL-203B
SL-676, SL-677	SL-103PDQ		SL-208		SL-181	SL-202A	SL-203B
SL-918	SL-229PDQ		SL-218			SL-918L	SL-203C
SL-623	SL-223					SL-623L	
SL-512	SL-213PDQ		SL-208			SL-202	SL-203B
SLR-9000CPDQ, SLR-9010 SLR-9014	SL-213PDQ		SL-208				SL-203B
SL-926, SL-976	SL-104PDQ		SL-218			SL-926L	SL-203C
SL-908, SL-975	SL-104PDQ					SL-908L	SL-203C
SL-412, SL-406, SL-421				SL-105			
SL-425, SL-426, SL-425A, SL-426A				SL-100-6			
SL-450, SL-840		SL-101A		SL-100-6	SL-204		
SL-513	SL-513-BULB		SL-208			SL-202	
SL-851				SL-100-6			
SL-651	SL-103PDQ		SL-208		SL-150	SL-202	SL-203B
SL-821	SL-103PDQ				SL-194	SL-904L	SL-203B
SL-826	SL-103PDQ		SL-208		SL-150	SL-202	SL-203B
SL-825	SL-103PDQ		SL-208		SL-200	SL-202	SL-203B
SL-8907	SL-103PDQ		SL-208		SL-200	SL-202	SL-203B
SL-827	SL-103PDQ		SL-208		SL-181	SL-202A	SL-203B
SL-818	SL-229PDQ		SL-218			SL-918L	SL-203C
SL-875, SL-8908	SL-104PDQ		SL-218		SL-908H	SL-908L	SL-203C
SL-1000	SL-235						
SL-1002, SL-1005, SL-1022	SL-209PDQ SL-217PDQ					SL-1002L	
SL-1032, SL-1062	SL-230PDQ					SL-1006L	
SL-1042, SL-1075, SL-1082	SL-225PDQ SL-209PDQ					SL-1082L	
SL-1003, SL-1006	SL-209PDQ					SL-1006L	
SL-2250C	SL-225PDQ						
SLR-2134							2134-HOOK
SL-7318, SL-7316				SL-167			
SL-7308, SL-7306				SL-166			
SL-864, SL-2125, BA-2116					SL-260		2166-HOOK
UVR-9000, UVR-9012B, UVR-9014, UVR-9014G	SL-129		SL-208				SL-203B