

USB RECHARGEABLE

TACTICAL FLASHLIGHT

**BAYCO**  
PRODUCTS INC.

**NIGHTSTICK**<sup>®</sup>  
*Life Depends on Light*<sup>™</sup>




Sliding collar hides USB port when not in use



Red **charging indicator light** turns green when fully charged



Use the included li-ion battery for day-to-day use or **included back-up CR123 carrier** when away from a rechargeable battery source (CR123 batteries not included)



Press and hold down single switch to **cycle between high, medium and low modes**. Press twice to activate **strobe mode**

**PERFECT**  
EVERYDAY USE




**5.9"**

**5 oz**



**PERFECT**  
EVERYDAY USE

FLY STANDARD	HIGH	MEDIUM	LOW
	900 LUMENS	350 LUMENS	100 LUMENS
	2h	4h 25min	16h
	215m	129m	56m
	11524cd	4133cd	1040cd



CERTIFIED



**900 LUMENS**

# TACTICAL FLASHLIGHT

## LITHIUM ION BATTERY (INCLUDED)

### ITEM NUMBER/UPC

- USB-558XL, UPC 0 17398 80602 2

### MARKET APPLICATIONS

- Law enforcement, security, sporting goods, fire, rescue, industrial and automotive

### CERTIFICATIONS

- CE, NFPA-1971-8.6 (2013)

### CASE MATERIAL

- Aircraft grade 6061-T6 aluminum with type II anodized finish

### LUMENS/RUNTIME

- HIGH: 900L, 2 hrs. runtime  
 - MEDIUM: 350L, 4.25 hrs. runtime  
 - LOW: 100L, 16.75 hrs. runtime

### CANDELA

- HIGH: 11,524  
 - MEDIUM: 4,133  
 - LOW: 1,040

### BEAM DISTANCE

- HIGH: 215 m  
 - MEDIUM: 129 m  
 - LOW: 56 m

### WATER RATING

- IP-X7 Waterproof

### DROP RATING

- 2 meters

### DIMENSIONS

- LENGTH: 5.9 in (150 mm)  
 - BARREL DIAMETER: 1 in (25 mm)  
 - BEZEL DIAMETER: 1.2 in (30 mm)  
 - WEIGHT: 5.7 oz (162 g) (with batteries)

### BATTERY






- Li-ion rechargeable battery, or 2 CR123 (not included) using CR123 battery carrier (included)


### WARRANTY

- Limited lifetime warranty

### WHAT'S INCLUDED

- Flashlight  
 - Lithium-ion rechargeable battery  
 - CR123 battery carrier  
 - Two foot USB charging cord  
 - Instruction manual

FL1 STANDARD	HIGH	MEDIUM	LOW
	900 LUMENS	350 LUMENS	100 LUMENS
	2h	4h 25min	16h
	215m	129m	56m
	11524cd	4133cd	1040cd
	2m / 1m		

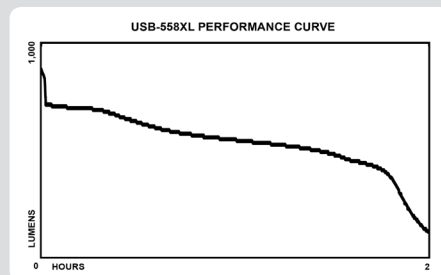

CERTIFIED

CE

