


Brite Nite[™] Dome USB Lantern[™]



User's Manual

We are constantly improving our products so specifications are subject to change without notice.

Thank you for purchasing the Brite Nite™ Dome USB Lantern™ by Wagan Tech®. With normal care and proper treatment, it will provide years of reliable service. Please read all operating instructions carefully before use.

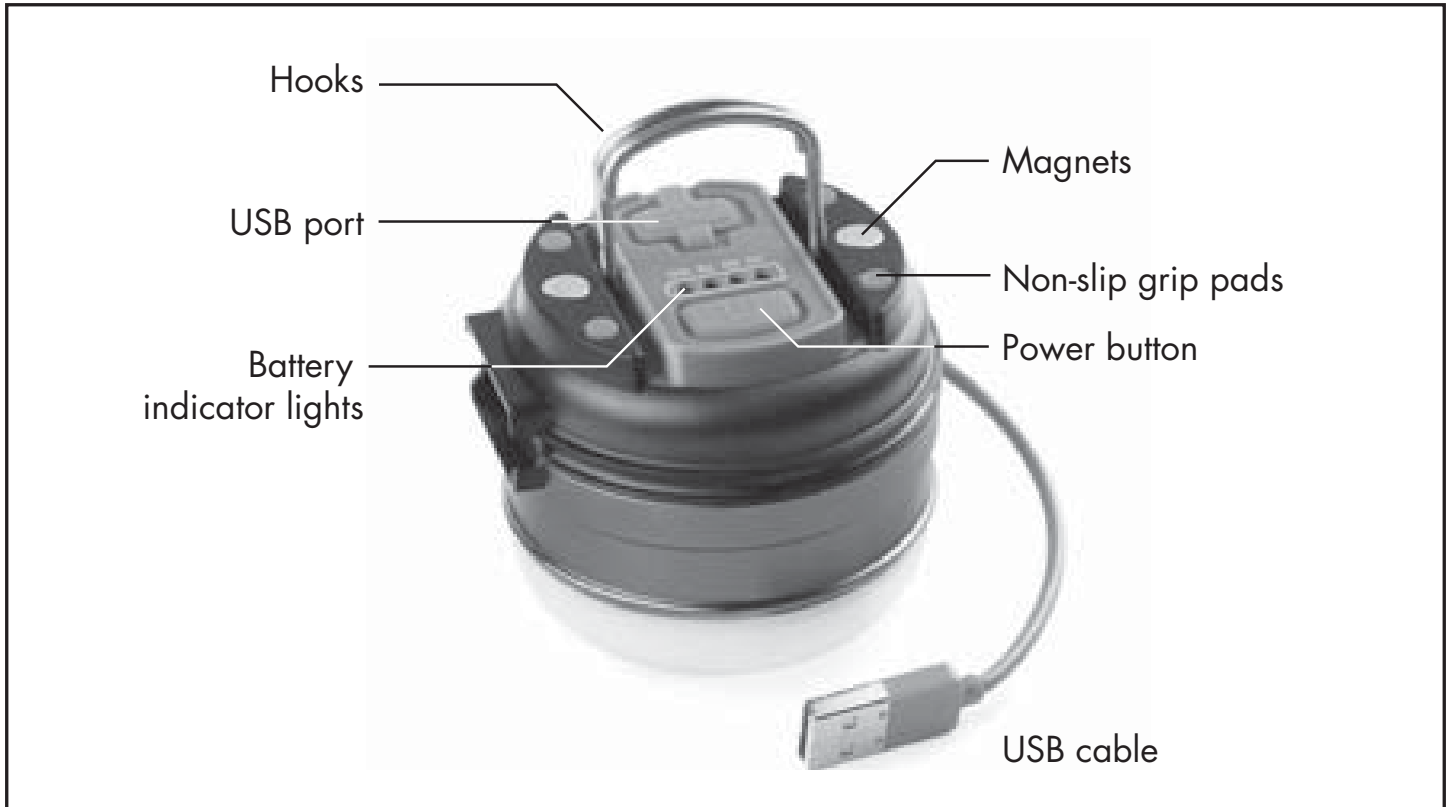

FEATURES

- 12 bright LEDs
- 3 light modes: High, Low and SOS
- Dual function flashlight and lantern
- Doubles as a power bank with USB output for charging your devices
- Rechargeable lithium battery
- 4 stage battery status indicator
- Dual hooks for hands-free lighting
- Strong magnetic base
- Compact and lightweight

SPECIFICATIONS

Lumens	220 (high), 110 (low)
Run Time	6 hours (high), 14 hours (low)
Battery	3000mAh lithium polymer (3.7V)
Impact Resistance	1 meter
Beam Distance	15 meters
USB Output	1 A

CAUTION


- This product is not a toy: Do not allow children to play with or near this item.
- Do not store in direct sunlight or near a heat source.
- Use for intended purposes only.
- Do not submerge in water.
- This product contains strong magnets that may cause interference with pacemakers and other implanted medical devices when placed within a close proximity. Keep this product at least 6 inches from your chest if you have a pacemaker.

CHARGING THE INTERNAL BATTERY

This product may arrive partially charged. To get the maximum use, it is recommended to fully charge the unit before use. In order to prolong the life of the battery, be sure to fully recharge the unit every 3 to 6 months, even if the unit has not been used.

Check the status of the battery by pressing the power button once. The number of illuminated LEDs indicates the percentage of charge (25%-100%).

1. Unwind the USB cable and plug into any USB charger/power source.
2. While recharging, the status indicator lights will show the present battery capacity. When the internal battery is fully charged, all indicator lights will be solid. Charging time for a fully depleted battery is 5 to 6 hours.

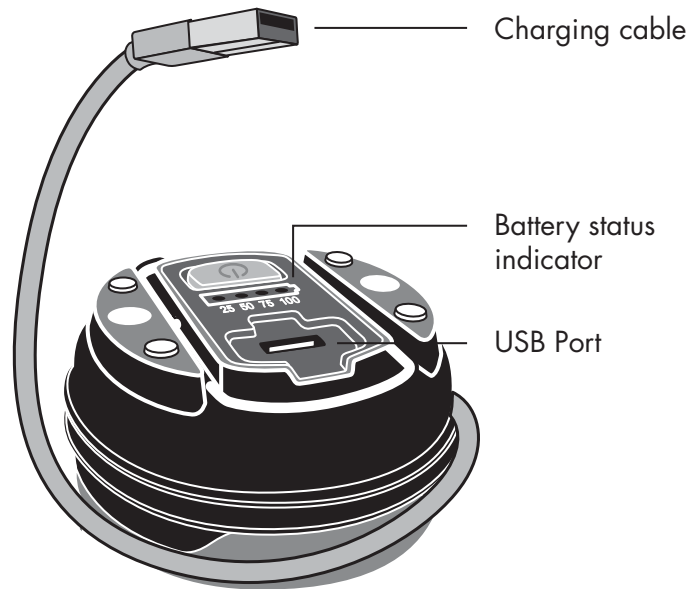

CARE AND MAINTENANCE

- Periodically wipe the entire lantern with a soft clean cloth.

USAGE

Light

The Dome USB Lantern has 3 light modes.

1. To turn unit on: press the power button 2 times for High mode (pressing once will only show the battery status)
2. To change modes: press the power button to cycle through the modes once for each mode (High > Low > SOS > OFF).

Power Bank

The Dome USB Lantern doubles as a portable power bank which allows you to charge your devices when you need them.

1. Open the dust cover from the USB port
2. Connect a user-supplied USB cable to the USB power port
3. The battery indicator LEDs will illuminate.
4. After use, disconnect the USB cable and replace the dust cover.