






## XPP-5466

### FORTEM™ Intrinsicly Safe Dual-Light Flashlight


<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, fire & rescue
<b>CASE MATERIAL</b>	Aircraft-Grade 6061-T6 Aluminum
<b>DIMENSIONS</b>	Length: 3.2 in. (1.2 mm) • Width: 1.4 in. (0.05 mm)
<b>WEIGHT</b>	Weight: 6.5 oz. (184 g)
<b>LIGHT SOURCE</b>	CREE® LED technology – 50,000 +hours LED life
<b>LIGHT OUTPUT</b>	Flashlight Lumens: High 250, Medium 100, Low 25 • Floodlight Lumens: High 115, Medium 50, Survival 10 • Dual-Light Lumens: 150
<b>ON/OFF</b>	Dual Switches • High/Low Spotlight • High/Low Floodlight • Dual-Light
<b>RUN-TIME</b>	Flashlight Run-time: High 3.5 hrs., Medium 6.5 hrs., Low 16 hrs. • Floodlight Run-time: High 3.5 hrs., Medium 6.5 hrs. • Survival 16 hrs.
<b>BATTERY</b>	2 CR-123 Lithium Batteries (included)

- FEATURES**
- Flashlight – Floodlight – Dual-Light™
  - User-selectable brightness on flashlight & floodlight including 10 Lumen survival mode on floodlight
  - 45 degree downward angled floodlight
  - Works with virtually all fire helmets and hard hats
  - Can be mounted to the brim on either side of most helmets
  - Allows user to select exact angle and position for optimum light alignment and clearance of face shields, goggles or other equipment
  - Rear-facing Green safety LED
  - Dustproof / Waterproof
  - Impact and chemical resistant
  - Meets the requirements for NFPA-1971-8.6 (2013)
  - Serialized for personal identification


FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>250</b> LUMENS	<b>100</b> LUMENS	<b>25</b> LUMENS
	<b>3h 30min</b>	<b>6h 30min</b>	<b>16h</b>
	<b>203m</b>	<b>126m</b>	<b>64m</b>
	<b>10,335cd</b>	<b>3,975cd</b>	<b>1,021cd</b>
			

**WARRANTY** Limited Lifetime Warranty

**APPROVALS**

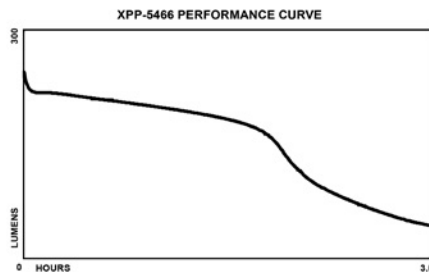

**Bayco Products, Inc. XPP-5466**

 E 467756 ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE CE 0359	CLASS I DIV 1 GRPS A-D T4 CLASS II & III DIV 1 GRPS E-G T135°C CLASS I ZONE 0 AEx ia IIC T4 Ga CLASS I ZONE 0 Ex ia IIC T4 -20°C ≤ Tamb ≤ +40°C 3.0V/Cell / Energizer 123
--	--

**WARNINGS:**  
Do not change batteries in hazardous location.  
Use only Energizer 123 Batteries

<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0	<b>Certified to:</b> CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25
---	--