



Since 1946, the **Bohning Company LTD**® has proudly designed and manufactured some of the most innovative and successful arrow accessories from the same location in Lake City, Michigan. As we enter our 75th year of operation, the passion to continue the tradition remains stronger than ever. We stand proudly with our customers, distributors, and sales partners, while supporting archery organizations world-wide. This milestone anniversary is made possible by **you**; the archer, dealer, distributor, media and sales partners, who have graced us with your trust for 75 years.

The Bohning story started when Rollin Bohning, a chemist, family man, and archer sought to solve the issue of broadhead to arrow adhesion in 1946. That same year Ferr-L-Tite® was created and, after extensive work with Fred Bear and Doug Easton, it was perfected. Seventy-five years later, Ferr-L-Tite remains the industry standard.

We are a privately owned and operated company, manufacturing products which have earned the title "most successful and widely used in the world". Throughout the past seven decades, we have produced items for the archery, Christmas tree, fishing, and agricultural industries.

Here at Bohning innovation is expected, delivered, and driven by a team of dedicated people who live and work in a place of natural beauty, where wildlife is abundant and peace of mind is just a dirt road away. Our everyday commitment to archery is evident in our continued and enthusiastic support of many local, regional, and national organizations. We've contributed to the mission of many these organizations, even in trying economic times, and we are a recognized leader in customer service, quality, and innovation because of our close contact, involvement, and support of the industry.

Our desire and ability to take a product from conception to launch in a short time frame, react to customer demands, and constantly improve products sets us apart from all others. Quality and performance keeps Bohning products on the arrow, on the fletching table, and in the photo after the hunt. The memories earned from those adventures live in the very products we make.




CONTENTS

- 2 Featured Products
- 6 Vanes
- 14 Wraps
- 16 Nocks
- 18 Fletching Jigs
- 20 Premium Points
- 24 String Care
- 29 Adhesives
- 31 Accessories
- 40 Crossbow
- 42 Traditional
- 48 Apparel
- 49 Replacement Parts


2

GRIFFIN® VANE - PG. 9


In 2021 the Summer Olympics will be held in Tokyo, Japan. Bohning is featuring our one of a kind Olympic recurve vane, the Griffin. This scientifically designed vane is perfect for Olympic recurve and 3D compound shooters. The twisted ribbon design delivers two times the rotation as mylar vanes and is super durable.



GRIFFIN®



- For Olympic recurve and 3D compound
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs

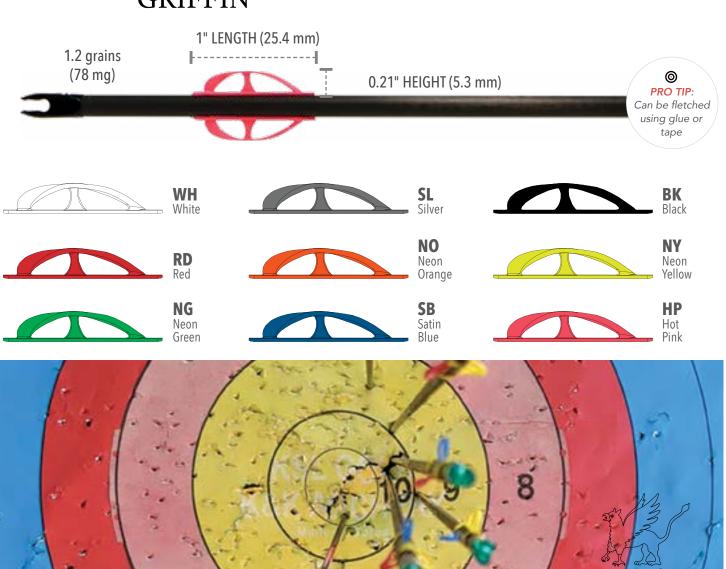

SHOOTER STOOL-PG. 32



MULTI-FLETCHER®- PG. 19

• Capable of fletching 1° to 3° right, 1° to 3° left, or straight

Fully adjustable to accommodate all arrow diameters including bolts and micro arrows

• Easy clean up — clamp inserts and clamp plates can be cleaned with acetone to remove glue

• Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles


Bring your arrow fletching game to the next level. The Multi-Fletcher allows you to fletch every type of arrow imaginable. Everything is included to accurately place your plastic vanes straight, 1° right and left, or 3° right and left. It even comes with a split insert to work with your feathers. Are you ready to become a fletching expert? Try out the Multi-Fletcher this season!









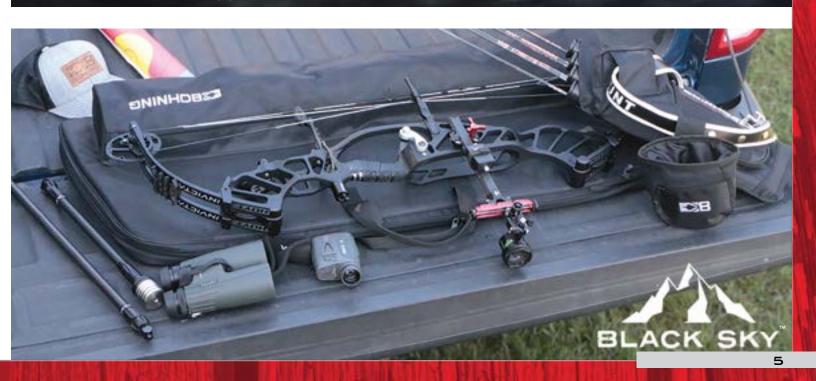

0 PRO TIP:

Made out of

the ultra-durable Blazer vane material. Time-tested,

> performance proven.



© PRO TIP: Introduced in 2004, the Blazer Vane was designed for hunters and target shooters alike. The Blazer vane allows you to switch from field points to broadheads with minimal adjustment. This revolutionary product is still the #1 vane in the world.



10831 - 36 pk **10832 -** 100 pk **10833 -** 1000 pk



STIFFNESS: 6.0



0 PRO TIP: Reader's Choice Gold

Best Fletching

since 2005. - Bowhunting World









Blater

Blazer











6.1 GRAINS

(395 mg)















BLEEL'

2"LENGTH (50.8 mm)















0.53"HEIGHT (13.5 mm)































NEW

101042CT





RT Realtree® BR or WH



ALL COLOR VANE AND WRAP COMBO PACKS

 Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

101042

- Includes:
 - 12 arrow wraps (standard size)
 - 36 True Color Blazer® vanes











FΒ

Fred Bear Made WH








⊚ PRO TIP:

Same great Blazer vane with

enhanced

graphics

OPRO TIP: One factor in choosing a vane is its stiffness. Bohning has developed a stiffness scale to help you dial in your perfect arrow setup. On a 1 to 10 scale, 1 is the most flexible and 10 is the stiffest.























HS Hot Sun





GWF

NEW

BS Blue





NEW

FR





CANF

American Flag





RFL















TXF







WLP

TRUE COLOR

VANE AND WRAP COMBO PACKS

• Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

101040

- Includes:
 - 12 arrow wraps (standard size)
- 24 True Color Blazer® vanes
- 12 white Blazer® vanes



No other vane manufacturer does color like Bohning. Our 4 color printing process gives us the ability to make you stand out in the crowd. With over 50 color choices of Blazer Vanes, you can make your arrow set-up unique. Remember at Bohning: "It's In Our Vanes!"

WH/NO





COMBO PACK

- Includes:
- 12 white Blazer® vanes
- 24 color Blazer® vanes

101050 - 36 pk



WH/RD White and Red



WH/NY White and Neon Yellow













TRUEFLETCH®

- Shrinks to Fit shafts 0.219" - 0.375" (5.56 mm - 9.525 mm)
- Store in a cool place until use
- 5" in length (127 mm)
- Average weight: 27 grains (1.7 g)

101001 - 6 pk **101003 -** 50 pk







@ PRO TIP:




CUSTOM ARROW WRAPS AND BLAZER VANES


- Color options:
 - Wraps: All colors including patterns
 - Blazer Vanes:- Solid colors only
- Order 50 wraps minimum
- Order 1,000 vanes minimum

ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!





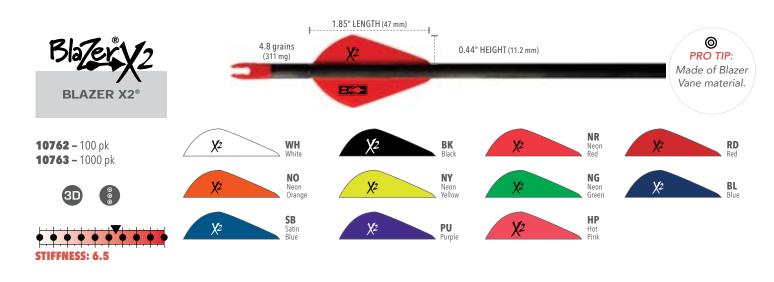

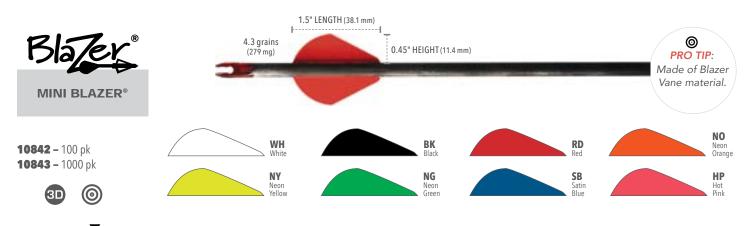





GRIFFIN® VANE

GRIFFIN


- For Olympic recurve and 3D compound
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs

101055 - 40 pk









PRO TIP:
Can be fletched using glue or tape

HEAT

0.36" HEIGHT (9.2 mm)

0

****HEAT**


HEAT VANE

• Made out of the ultra-stiff Heat* vane material for maximum arrow stabilization, arrow control, and quiet flight


101036 - 36 pk **101037** - 100 pk **101038 –** 1000 pk













American Flag



2.25" LENGTH (57.2 mm)

相思

1662

1.75" LENGTH (44.5 mm)

X3[™] VANE

• Made out of the ultra-stiff Heat* vane material for maximum arrow stabilization, arrow control, and quiet flight


101052 - 100 pk

(3D)










5.8 grains

(376 mg)

4.3 grains (285.1 mg)



0.40" HEIGHT (10.2 mm)





0 **PRO TIP:** Blazer Bond or

Fletch-Fuse are recommended

for this vane.









3D

STIFFNESS: 6.1

STIFFNESS: 6.7

3" VANE (76.2 mm)

2.25" VANE (57.2 mm)

@

1.5" AND 1.75" VANE

(38.1 mm and 44.5 mm)

000

WH

TL

HP

00

000



SL Silver

NO

BL

Neon Orange

OXO

00

000

NR

Neon Red

NG

Neon Green

PU

000

OXO

BK

NY

Neon Yellow

SB

Satin Blue

UKF





VANE SYMBOL LEGEND















- Made of Blazer® vane material
- Solves clearance issues when using large diameter shafts


101047 - 36 pk **101048** – 100 pk

101049 - 1000 pk






STIFFNESS: 6.5









AIR™ VANE

- Made of Blazer® vane material
- Great for long distances and smaller diameter shafts
- Ideal for minimizing crosswind drift


101026 - 36 pk

101027 - 100 pk

101028 - 1000 pk





J AIR ∖



4.5 grains / AIR \ 0.3" HEIGHT (7.6 mm) (292 mg) WH

2" LENGTH (50.8 mm)







NR

NG

Neon Green

ΡU





- Made of Blazer* vane material
- Ideal for minimizing crosswind drift

101021 - 36 pk **101022 -** 100 pk

101023 - 1000 pk











SOLID WRAPS

- Indicate color code when ordering
- 13 wraps per pack

4" WRAP (101.6 mm)

501031 - 4" Standard

501032 - 4" Small

501033 - 4" XS

501034 - 4" Large

501035 - 4" XL

5.5" WRAP (139.7 mm)

501071 – 5.5" Standard

501072 - 5.5" Small **501073** - 5.5" XS

501074 - 5.5" Large

501075 - 5.5" XL

7" WRAP (177.8 mm)

501051 - 7" Standard

501052 - 7" Small

501053 - 7" XS

501054 - 7" Large

501055 - 7" XL

SOLID AND REFLECTIVE WRAPS



PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

501001 – 4" Standard

501002 - 4" Small

501003 - 4" XS

501004 - 4" Large

501005 - 4" XL

5.5" WRAP (139.7 mm)

501061 – 5.5" Standard

501062 - 5.5" Small

501063 - 5.5" XS

501064 - 5.5" Large

501065 - 5.5" XL

7" WRAP (177.8 mm)

501041 – 7" Standard

501042 - 7" Small

501043 - 7" XS

501044 - 7" Large

501045 - 7" XL

		MEWI	поп	DEFINI	HUN	WRAP	•	
FR	BS	HS	СВ	TGT	СТ	KM	KH	KP
First	Blue	Hot	Cool	Target	Caution	Kryptek	Kryptek	Krypte
Resnon-	Skv	Sun	Blue	Face	Tane	Mandrake	Highlander	Pontus

BX

GX Green X-Ray ΥX

OX

HIGH DEFINITION WRAPS

BWF

RWF

TF CF





WEIGHT CODE (SEE TABLE PG. 13)

WRAP AROUND NUMBER DECAL

- 16 sets of numbers 1-12
- Fits arrows up to standard diameter : 19/64"/ 0.296" (7.54mm)


501012WA







HIGH DEFINITION WRAPS

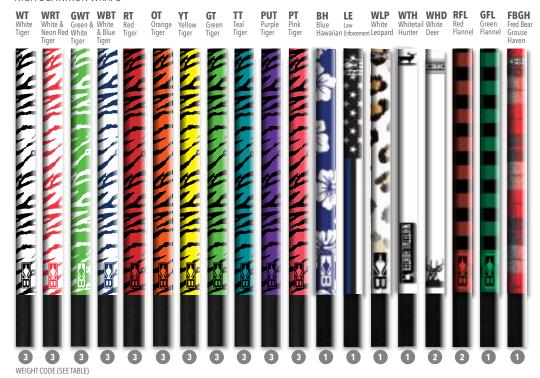

HIGH DEFINITION WRAPS BIRCH WSPT FBC DC

RE NOC CAMO1 PC

Birch Bark	White Spatter	Fred Bear Camo	Digital Camo	Realtree® Edge	Neon Orange Camo	Camo HD	Pink Camo	Yellow Airbrush	Crested Wrap Yellow	Crested Wrap Blue	Crested Wrap Red	Australian UK Flag Flag	Canadian Flag	Conf Flag	Industrial Flag	Stars & Stripes
THE WALLE WALLE	₩ -				では、100mmので							*		* * *	政方式のなどのでする。	語 トルト
2	1	0	1	1	2	1	1	2	0	1	0	0 0	1	0	1	1

YAB

CYE CBL CRD AUSF UKF

WEIGHT CODE

WEIGHT OF SINGLE WRAP IN GRAINS

	0	2 3	4			
4" WRAP (101.6mm)						
XS	4.2gn	5.4 gn	8.4 gn			
	(272mg)	(350 mg)	(544 mg)			
SM	4.8 gn	6.2 gn	9.5 gn			
	(311 mg)	(402 mg)	(616 mg)			
STND	6.0 gn	7.7 gn	11.9 gn			
	(389 mg)	(499 mg)	(771 mg)			
LG	6.5 gn	8.4 gn	13.0 gn			
	(421 mg)	(544 mg)	(842 mg)			
XL	7.2 gn	9.2 gn	14.3 gn			
	(467 mg)	(596 mg)	(927 mg)			
	5.5" WRA	P (139.7mm)			
XS	5.8 gn	7.4 gn	11.5 gn			
	(376 mg)	(480 mg)	(745 mg)			
SM	6.6 gn	8.5 gn	13.1 gn			
	(428 mg)	(551 mg)	(849 mg)			
STND	8.3 gn	10.6 gn	16.4 gn			
	(538 mg)	(687 mg)	(1063 mg)			
LG	9.0 gn	11.5 gn	17.8 gn			
	(583 mg)	(745 mg)	(1153 mg)			
XL	9.9 gn	12.7 gn	19.7 gn			
	(542 mg)	(823 mg)	(1277 mg)			
XS	7.4 gn	9.4 gn	14.6 gn			
	(480 mg)	(609 mg)	(946 mg)			
SM	8.4 gn	10.8 gn	16.7 gn			
	(544 mg)	(700 mg)	(1082 mg)			
STND	10.5 gn	13.5 gn	20.9 gn			
	(680 mg)	(875 mg)	(1354 mg)			
LG	11.4 gn	14.6 gn	22.7 gn			
	(739 mg)	(946 mg)	(1471 mg)			
XL	12.6 gn	16.2 gn	25.1 gn			
	(816 mg)	(1050 mg)	(1626 mg)			

- 1 = HIGH DEFINITION MATERIAL
- 2 = NEON MATERIAL
- 3 = SOLID COLOR MATERIAL
- 4 = REFLECTIVE MATERIAL

O PRO TIP:

Applying arrow wraps:

Ensure your hands are clean and free of contaminants that may adversely affect adhesion. Remove wrap from backing, placing wrap adhesive side up on a mouse pad or other semi-soft surface. Align shaft with the edge of the wrap and roll with steady motion and downward pressure. Once wrap is applied, roll the arrow between your hands to fully activate the adhesive. Place the index fletching over the wrap seam to help secure the wrap.

VISI-WRAP

WEIGHT CODE (SEE TABLE)

- 3 sets of 12 highly reflective decal wrans
- Fits arrows up to standard diameter: 19/64"/ 0.296" (7.54mm)

501018BL – Bohning Logo **501018TS** – Tiger





CANF CONF IF US

PRO TIP: Great way to

Great way to find arrows in poor lighting conditions

ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS

CL Clear

















0 PRO TIP:

PRESS FIT NOCK INSTALLATION: Using bowstring wax can be helpful for tight fitting nocks, simply apply wax to the nock shank, insert while rotating until the nock is in the appropriate position.

NEVER push the nock ears against a hard surface, use pliers to twist into place, or bite the nock.



Throat Size .120" (3.05 mm) 6.5 grains (421 mg)



Throat Size .120" (3.05 mm) 7.0 grains (454 mg)



Throat Size .120" (3.05 mm) 8.0 grains (518 mg)



Throat Size .120" (3.05 mm) 9.0 grains (583 mg)

BLAZER®

NOCK

• Double-lock throat

• Raised index

1003 - 12 pk

1004 - 100 pk

1005 - 1000 pk

Fits **.246"** shafts



Throat Size .120" (3.05 mm) 7.0 grains (583 mg)



Throat Size .109" (2.77 mm) 12.0 grains (778 mg)

SIGNATURE®

NOCK

F NOCK®



Double-lock throat

10141 - 12 pk **10142 -** 100 pk **10143 -** 1000 pk A NOCK®



- Double-lock throat
- Raised index

10151 - 12 pk **10152 -** 100 pk **10153 -** 1000 pk



- Recessed index

401023 - 12 pk **401024 -** 100 pk **401025 -** 1000 pk

H.E. NOCK



- Double-lock throat



SMOOTH RELEASE **INSERT NOCK**



Fits **.246"** shafts

- Single lock throat for ultimate accuracy
- Raised index

401033 - 12 pk **401034 -** 100 pk **401035 -** 1000 pk

Fits **.246"** shafts

- Smooth throat
- Raised index

1006 - 12 pk **1008** - 100 pk

1009 - 1000 pk



Standard Throat Size .120" (3.05 mm) 5.0 grains (324 mg)



Small Throat Size .106" (2.69 mm) 5.0 grains (324 mg)

.120" (3.05 mm) 5.0 grains (324 mg)

Throat Size

SMOOTH RELEASE PIN NOCK

BLAZER® PIN NOCK

Standard Throat

- Marked with the letter "V"
- Raised index

10071 – 12 pk **10072 -** 100 pk **10073 -** 1000 pk

Small Throat

- Marked with the letter "R"
- Raised index

10161 - 12 pk 10162 - 100 pk 10163 - 1000 pk

- Marked with letter "M"
 - Redesigned to fit broader range of pin sizes
 - Smooth throat and short ears
 - Raised index

401030 - 12 pk **401031 -** 100 pk **401032 -** 1000 pk

@ PRO TIP:

PIN NOCKS INSTALLATION: DO NOT use excessive force to install the pin nock onto the adapter as this could cause cracks in the nock and lead to nock failure.



All Bohning Pin nocks now accommodate a broader range of pin adapter brands!

0 PRO TIP:

INSPECTING YOUR NOCK The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This of course could harm you and damage your equipment. When in doubt, replace the nock.



Throat size .115" (2.92 mm) Weight dependent on size - see below

CLASSIC NOCK

- Glue-on nock for swedged end aluminum, wood and fiberglass
- Index and alignment feature

AVAILABLE SIZES:

- 5/16" (7.93 mm) Avg. Weight: 10.0 grains (648 mg)
- 11/32" (8.73 mm) Avg. Weight: 13.0 grains (842 mg)

10131 - 12 pk **10132 -** 100 pk

10133 - 1000 pk



Purple



11.0 grains (713 mg)



YE

9.0 grains (583 mg)

CROSSBOW NOCK

.300" Half Moon Nock (7.70 mm)

401008 - 12 pk

401009 – 100 pk

401010 - 1000 pk

.300" Flat Nock (7.70 mm)

401014 - 12 pk

401015 - 100 pk

401016 - 1000 pk






Throat size .118" (3 mm) 8.5 grains (551 mg)

APEX NOCK

• Glue-on nock for shafts with an O.D. of 0.197" (5 mm)

401007 - 1000 pk







T NOCK AND LEGEND NOCK: To install, simply apply 3-4 drops of Fletch-Tite Platinum, Blazer Bond, or Fletch-Fuse to the tapered end of the shaft. Use light pressure, twist the swedged nock on to the tapered end one full rotation until fully seated.



Weight dependent on size - see below

T NOCK

• Glue-on nock for swedged end aluminum, wood & fiberglass shafts

AVAILABLE SIZES:

- 1/4" T Nock (6.35mm)

Throat size: 0.105" (2.67 mm) Average Weight: 6.0 grains (388 mg)

- 9/32" T Nock (7.14 mm)

Throat size: 0.115" (2.92 mm) Average Weight: 8.0 grains (519 mg)

- 5/16" T Nock (7.94 mm)

Throat size: 0.115" (2.92 mm) Average Weight: 14.0 grains (907 mg)

- 11/32" T Nock (8.73 mm)


WH

Throat size: 0.105" (2.67 mm) Average Weight: 15.0 grains (972 mg)

1054T - 12 pk

1055T - 100 pk

1056T - 1000 pk



Throat size .105" (2.67 mm)

LEGEND NOCK

• Glue-on nock for swedged end aluminum, wood and fiberglass shafts

AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm) Average Weight 8.0 grains (519 mg)
- 5/16" Legend Nock (7.94 mm) Average Weight: 11.0 grains (713 mg)

1057 - 12 pk


1058 - 100 pk

WH

1059 - 1000 pk

SOLID COLOR TRANSLUCENT



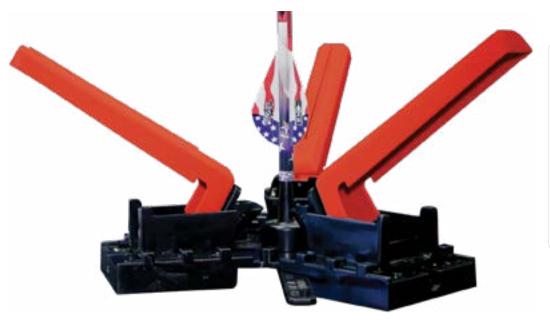

@ PRO TIP:

FAST, PRECISE AND VERSATILE:

Tower jigs fletch 3 vanes at once and apply more pressure than standard jigs. One base with interchangeable arm options for feathers, plastic vanes, mylar vanes, or Impulse vanes. Choose from straight, one degree (right or left) two degree (right or left), or three degree (right or left) helical arms. Engineeringgrade polymer allows you to soak arms in acetone (up to 1 hour) to remove CA glue build-up without damaging jig.

COLOR OF ARMS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART#
Gray (solid)	Plastic Vane	Straight	4" (101mm)	1201
Black	Plastic Vane	3° Right	3" (76mm)	1202
Red	Plastic Vane	1° Right	4" (101mm)	1200
Purple	Plastic Vane	3° Left	3" (76mm)	601038
Orange	Plastic Vane	1° Left	4" (101mm)	601037
Yellow	Thin Plastic Vane (e.g. Impulse™)	1° Right	4" (101mm)	601007
Gray w/ Red Clip	Mylar Vane	Straight	3.75" (95mm)	601024
Blue	Feather	2° Right	5" (127mm)	601008R
Green	Feather	2° Left	5" (127mm)	601008L

See page 43 for other Tower' Jig replacement parts

• Capable of fletching 1° to 3° right, 1° to 3° left, or straight • Fletch all 3 vanes at once with precise 120° spacing • Applies even pressure along the entire vane base • Great for single or multiple vane repairs too!

601027 - COMPLETE TOWER®

- Great for clubs and families
- All the Tower® Jig components in one purchase

12963 - TRIPLE TOWER®

- Arms: Gray (solid), Black, Red
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

12962 - HELIXTOWER®

- Arms: Black, Purple
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

TOWER® JIGS

601010 - FEATHER TOWER®

- Arms: Blue, Green
- Center Posts: F Nock, Standard, Swedged

601001 - CROSSBOWTOWER®

- Arms: Black, Red
- Center Posts: Crossbow

601035 - MYLAR TOWER®

- Arms: Gray w/ red clip
- Center Posts: F Nock, Standard, Pin Nock

601006 - IMPULSE TOWER®

- Arms: Yellow
- Center Posts: F Nock, Standard, Pin Nock



BLAZER® HELIX JIG

- 3° right helical on vanes up to 2.5" (63.5mm) long
- Fits standard shafts 0.293 -0.306" (7.4 - 7.8mm) OD
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

1344 - Blazer® Helix Jiq



BLAZER® STRAIGHT JIG

- Straight fletch on vanes up to 2.125" (54mm) long
- Fits shafts with 0.25" (6.3mm) OD or smaller
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

1345 - Blazer® Straight Jig



THE BIG JIG

- 3° right helical or 1° right offset on vanes up to 4" (101.6mm) long
- Fits standard shafts 0.293 -0.306" (7.4 - 7.8mm) OD
- •3 or 4 fletch (4 at 90° or 60°x120° apart)

1320 - The Big Jig



PRO CLASS JIG

- Capable of 3 or 4 fletch (4 at 90° apart)
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm)

1348 – Straight

1349 - Right Wing 1350 – Left Wing



PRO CLASS CLAMPS

1351 – Straight

1352 – Right Wing

1353 – Left Wing

601020 - 1" (25cm) Vane Fletching Clamp - Griffin Vane

MULTI-FLETCHER®

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Easy clean up clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles

601055 - Multi-Fletcher®

601056 - Clamp Plate

@ PRO TIP:

EASY CLEAN UP: Clamp and inserts can be cleaned with acetone (up to one hour).

DO NOT use acetone to clean the other plastic parts.



INSERTS INCLUDED WITH THE MULTI-FLETCHER:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART#
Gray	Plastic Vane	Straight	5" (127mm)	601059
Black	Plastic Vane	3° Right	3" (76mm)	601057
Red	Plastic Vane	1° Right	5" (127mm)	601058
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060
Blue	Feather	2° Right	5" (127mm)	601062
Green	Feather	2° Left	5" (127mm)	601063







AVAILABLE IN 6, 12, 120, AND 1,200 PACKS (SPECIFY PACK SIZE WHEN ORDERING)

BULLET POINTS AND CONCAVE POINTS



SUPERIOR CONCENTRICITY FOR A TRUE SPIN: GUARANTEED CONCENTRIC WITHIN 0.001"

SCREW-IN POINT FIT GUIDE

PLACE YOUR SHAFT HERE

(start at largest diameter and move right until white dotted line is not visible)



(see conversion chart below for metric)

	CONVERSION CHAR	Т
17/64"	0.266"	6.75 mm
9/32"	0.313"	7.14 mm
19/64"	0.296"	7.54 mm
5/16"	0.313"	7.95 mm
21/64"	0.328"	8.33 mm
11/32"	.0344"	8.74 mm

PRO TIP:

Coat the threads of the screw-in point with a solid wax, like Tex-Tite, Seal-Tite, or Grit Guard, prior to installing as this will help prevent it from loosening.



PIN POINTS

		SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART#
			100 gn (6.5 g)		851036
A		PS23	150 gn (9.7 g)	Black Eagle	851037
			180 gn (11.7 g)		851038
			120 gn (7.8 g)		851039
			180 gn (11.7 g)	D. 15 1	851040
400		PS27	210 gn (13.6 g)	Black Eagle	851041
			250 gn (16.2 g)		851042
			100 gn (6.5 g)		851030
	-	Tank 23D/	120 gn (7.8g)	Carbon	851031
		X Buster (350 - 500 Spine)	150 gn (9.7 g)	Express	851032
			180 gn (11.7 g)		851075
A			120 gn (7.8 g)		851063
/A		X Buster (600 - 700 Spine)	150 gn (9.7 g)	Carbon Express _*	851064
1			180 gn (11.7 g)		851065
			100 gn (6.5 g)		851047
		LineJammerPro	120 gn (7.8 g)	Carbon Express _®	851048
			150 gn (9.7 g)		851049
			150 gn (9.7 g)		851068
		T1-07	180 gn (11.7 g)	Carbon Express.	851069
		Tank 27	210 gn (13.6 g)		851070
			250 gn (16.2 g)		851071
		2242	150 gn (9.7 g)	Fastan	851001
		2312	200 gn (13.0 g)	Easton _®	851002
		2314	150 gn (9.7 g)	Easton	851003
A		2314	200 gn (13 g)	Easton _®	851004
/A		2245	150 gn (9.7 g)	Fastan	851005
1		2315	200 gn (13.0 g)	Easton₀	851006
		2318	150 gn (9.7 g)	Eacton	851028
		2318	200 gn (13.0 g)	Easton _®	851029
		2712	200 gn (13.0 g)	Eacton	851007
		2/12	300 gn (19.4 g)	Easton。	851008
			100 gn (6.5 mg)		851094
		FatBoy	150 gn (9.7 mg)	Easton	851095 851096
			180 gn (11.7mg)		031070

PRO TIP: To install glue in points use Ferr-L-Tite for aluminum arrows and Ferr-L-Tite Cool Flex for carbon arrows or carbon hybrid arrows.

PIN POINTS (CONT.)

		SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART#
			100 gn (6.5 g)		851033
	-	SuperDrive 23	120 gn (7.8 g)	Easton。	851034
A			150 gn (9.7 g)		851035
A			100 gn (6.5g)		851050
		SuperDrive 25	150 gn (9.7 g)	Easton。	851051
181			180 gn (11.7 g)		851052
			150 gn (9.7 g)		851066
		SuperDrive 27	180 gn (11.7 g)	Easton。	851067
			100 gn (6.5 g)		851053
A	-	9.3 Max	120 gn (7.8 g)	Gold Tip∘	851054
			150 gn (9.7 g)		851055
1			120 gn (7.8 g)		851072
	-	Triple X	180 gn (11.7 g)	Gold Tip₀	851073
			210 gn (13.6 g)		851074
	-		100 gn (6.5 g)	Victory	851060
Λ		NVX 23	150 gn (9.7 g)		851061
A			180 gn (11.7 g)		851062
	-	NVX 25	100 gn (6.5 g)	Victory∘	851056
		NVX 23	120 gn (7.8 g)	victory	851057
		NVX 25 HV	100 gn (6.5 g)	Victory _®	851058
			120 gn (7.8 g)		851059
			120 gn (7.8 g)		851043
		NVX 27	180 gn (11.7 g)	Victory₀	851044
		HAV F1	210 gn (13.6 g)	victorys	851045
			250 gn (16.2 g)		851046

BREAK-OFF

0.166"/4.22 mm	Type I (6.5-7.2-7.8 g) 0.218" (5.54 mm) 851025 0.166"/4.22 mm		SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	PART#
Type II (6.5-7.2-7.8g) (2.29" (0.228" (5.56-5.79mm)) 851026	Type II 100-110-120 gn	A -		· ·		851025
0.106"/4.22 mm 100-110-120 gn 0.229" (5.82mm) 851027	0.166"/4.22 mm 100-110-120 gn 0.229" (5.82mm) 851027			9	0.219"- 0.228"	851026
(0.3-7.2-7.0g) and up	#			· ·	0.229" (5.82mm)	851027

NEW

ANCHOR KNOT

- Serve-less cable attachment for drop away rest cord
- Time Saver
- Durable construction
- Made in USA

802001 – Anchor Knot **802017 –** 24 Anchor Knots

This product is not designed to be served in. Doing so will result in damage to your strings.













O PRO TIP:

INSTALL A PEEP SIGHT IN 10 SECONDS!

Bohning's Serveless Peep It® and Anchor Knot are huge time savers because you don't need to serve them. No more accidentally cutting or burning your bowstring during the peep removal process!

NEW

SERVE-LESS PEEP IT®

- Serve-less peep site
- Time saver installs without serving
- Durable construction
- Made in USA

SERVE-LESS PEEP IT SERVE-LESS PEEP IT - 24 PACK

802002 - 1/8"* 802012 - 1/8"* **802003 -** 3/16" **802016 -** 3/16" **802004 -** 7/32" **802014 -** 7/32"

802005 - 1/4" **802015 -** 1/4"

WITH ALIGNER* WITH ALIGNER - 24 PACK* **802006 -** 3/16" **802026 -** 3/16" **802007 -** 7/32" **802027 -** 7/32" 802008 - 1/4" 802018 - 1/4"

THREADED* THREADED - 24 PACK* **802009 -** 1/8" 802019 - 1/8" **802010 -** 1/4" 802011 - 1/4"

* available in black (BK) only

This product is not designed to be served in. Doing so will result in damage to your strings.

	CONVERSION CHART	
1/8"	0.125"	3.18 mm
3/16"	0.187"	4.76 mm
7/32"	0.218"	5.54 mm
1/4"	0.250"	6.35 mm



O PRO TIP:

PERFECTLY ALIGNED FOR A CLEAR SIGHT PICTURE.

The Peep It® stays in place even better than a standard tied-in peep sight. It is also available as a Threaded Peep It, which accepts clarifiers, verifiers, and Peep It with aligner.



STRING NOCKS

- Creates a positive nocking point for consistent shots
- Quick and easy to install Hunter (black liner): for 12-14 strand strings -5.4 grains (350 mg)
- Cam (red liner): for 16-18 strand strings -7.4 grains (480 mg)

Cam String Nocks

1065 - 6 pk

1068 – 100 pk

1071 - 1000 pk

Hunter String Nocks

1064 – 6 pk

1067 – 100 pk

1070 – 1000 pk



STRING WHISKERS

- Two pieces per package, 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

1051 – 1Pair

1635 - 50 Pair



CINCH SLING

- Easily adjustable to fit over bare hand or gloves
- Base plate allows for the stabilizer to be torqued without rotating out of place
- Stays open for ease of use

801049BK – Cinch Sling **15211** – 12 pk (bulk)



STRING SEPARATOR

- Fast and easy installation of serving, peeps, silencers, etc.
- Easily inserts into strands without damaging, twist into separate strings
- 2" (50.58mm) x .625" (15.87mm) x 1" (25.4mm)

1601 - Separator



KISSER BUTTON

- Helps maintain a consistent anchor point every shot
- Lightweight and durable, 0.5" (12.7 mm) diameter
- Easy installation with 2 enclosed clips


1664 – Kisser w/ clips **801081** – 100 pk



"SLIM" PEEP

- Durable, high-impact and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm) tubing, bulk peeps do not

1668 – Peep with tube **1640** – 50 pk (peep only)

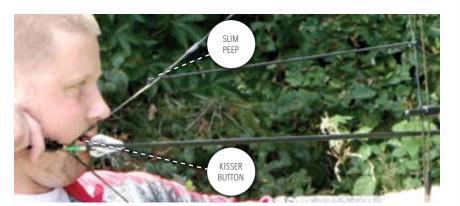



SEAL-TITE®

- Silicone-based bowstring wax
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Vegan

1360 – 0.92 oz (28 grams)

1631 – 24 tubes

1631BOWL - Bowl and 24pk

35001 - 250 tubes

3500 - 500 tubes

1360Box – 1 box 1.41 oz (40 grams)

1631Box - 24 boxes

35001Box - 250 boxes

3500Box - 500 boxes

SEAL-TITE

TEX-TITE



TEX-TITE®

- Natural-based bowstring wax
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

1306 - 0.92 oz (28 grams)

1630 – 24 tubes

1630BOWL - Bowl and 24pk

32001 – 250 tubes

3200 - 500 tubes

1306Box - 1 box 1.41 oz (40 grams)

1630Box - 24 boxes

32001Box - 250 boxes **3200Box -** 500 boxes



XCCELERATOR WAX®

- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

1365 – 0.51 oz (14.5 grams) tube

1634 - 16 tubes

1634BOWL - Bowl and 24pk



STRING SHIELD®

- Silicone-based liquid wax
- Sponge-top applicator
- Odorless and waterproof
- Vegan

301019 - 1.18 oz (35 ml) tube



collecting on strings • Odorless and waterproof

GRIT GUARD™

- Premium conditioners
- Convenient drop side box container made from 100% recycled plastic
- Vegan

GRIT GUARD

301026 – 1 box 1.41 oz (40 grams)



STRING SHIELD'S™ liquid formula penetrates fibers of individual strands on string.

OPENITY PRO TIP: SEAL-TITE® and TEX-TITE® are available in convenient and simple to use drop side boxes for the easiest bow string wax application on the market. No more wax melting out of a tube and all over your bow case and expensive equipment.

◎ PRO TIP: OTHER USES FOR SEAL-TITE®, TEX-TITE®, AND GRIT GUARD™

- Apply to nock shank on press-fit nocks for easier insertion and indexing.
- Apply to pin bushings for easier installation and indexing of tight-fitting pin nocks.
- Apply to point and broadhead threads to keep them from loosening and to help prevent rust.

BOWSTRING APPLICATION:

XCCELERATOR WAX

STEP 1 (ALL WAXES):

STRING SHIELD

Start with a clean string: using a rag dipped in warm water, or by wrapping a serving thread around the string and moving it up and down, remove dirt and old wax.

SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD - SEAL-TITE BOX - TEX-TITE BOX
Remove the I Apply wax lib	id and push o erally to bow		Step 2: Apply thin coat to bowstring using the foam applicator	Step 2: Lower the sides of the applicator box and apply wax liberally to bowstrings. Rub wax into string fibers using your fingers or leather strip -
warms, it mel		ers briskly using your fingers or a leather strip - as wax ring fibers.		as the wax warms, it melts into the string fibers



POWERGRIP

- A blend of tightly braided Spectra and nylon yarn
- Resin coated for durability and good grip
- 0.021" (0.53mm) Contains 75 yards (68.6 m)
- 0.025" (0.64mm) Contains 50 yards (45.7 m)

801034 - 0.021" (0.53mm) **801035** - 0.025" (0.64mm)



HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" (0.36mm) white turns clear when served tightly
- 0.014" (0.53mm) Contains 120 yards (109.7 m)
- 0.021" (0.64mm) Contains 75 yards (68.6 m)
- 0.024" (0.64mm) Contains 45 yards (41.1 m)

801031 - 0.014" (0.36mm) **801032 -** 0.021" (0.53mm) **801033 -** 0.024" (0.61mm)

COLOR CHOICES





POLYGRIP

- Superior grip
- 100% polyester
- 0.020" (0.53mm) Contains 75 yards (68.6 m)

1624 - 0.021" (0.53mm)



NYLON SERVING THREAD

- Traditional nylon serving thread
- Use for end serving, peeps and nocks
- 0.018" (0.46mm) Contains 100 yards (91.4 m)

1616 - 0.018" (0.46mm)



CROSSBOW SERVING THREAD

- Designed for high performance Braided for superior grip and crossbow strings
- 0.030" (0.76mm) Contains 45 yards (41.1 m)

801011BK- 0.030" (0.76mm)



#62 BRAID **SERVING THREAD**

- durability
- 0.021" (0.53mm) Contains 75 yards (68.6 m)
- 0.025" (0.64mm) Contains 60 yards (54.9 m)

1626 - 0.021" (0.53mm) **1627 -** 0.025" (0.64mm)



MINI-SERVER®

- Great for travel and quick fixes
- Eliminates the need for a cable spreader
- 2.06" x 1.4" x 0.875" (52.4 x 35.6 x 22.2 mm)
- Contains 27' (8.2 m) of #62XS 0.021" (0.53mm) serving in black and white

801017 - Server 801024BW - 2 pk spool replacement



LOOP ROPE

801002 - 39" (1m)

801003 - 100 ft (30.5m)

- 20% stronger than regular • 0.196" (2.0 mm) BCY #24 serving thread polyester D-loop rope
- 0.018" (0.46mm) Contains 100 yards (91.4 m)

#62 XS

SERVING THREAD

• 0.021" (0.53mm) Contains 75 yards (68.6 m)

801001 - 0.021" (0.53mm) **801010 -** 0.018" (0.46mm)

RD

COLOR CHOICES



BK





Neon Green







BL




SERVE-TITE

- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- Contains 75 yards (68.6m)

16240 – Serve-Tite w/ Polygrip 0.020" (0.53mm)

16150 - Tool Only



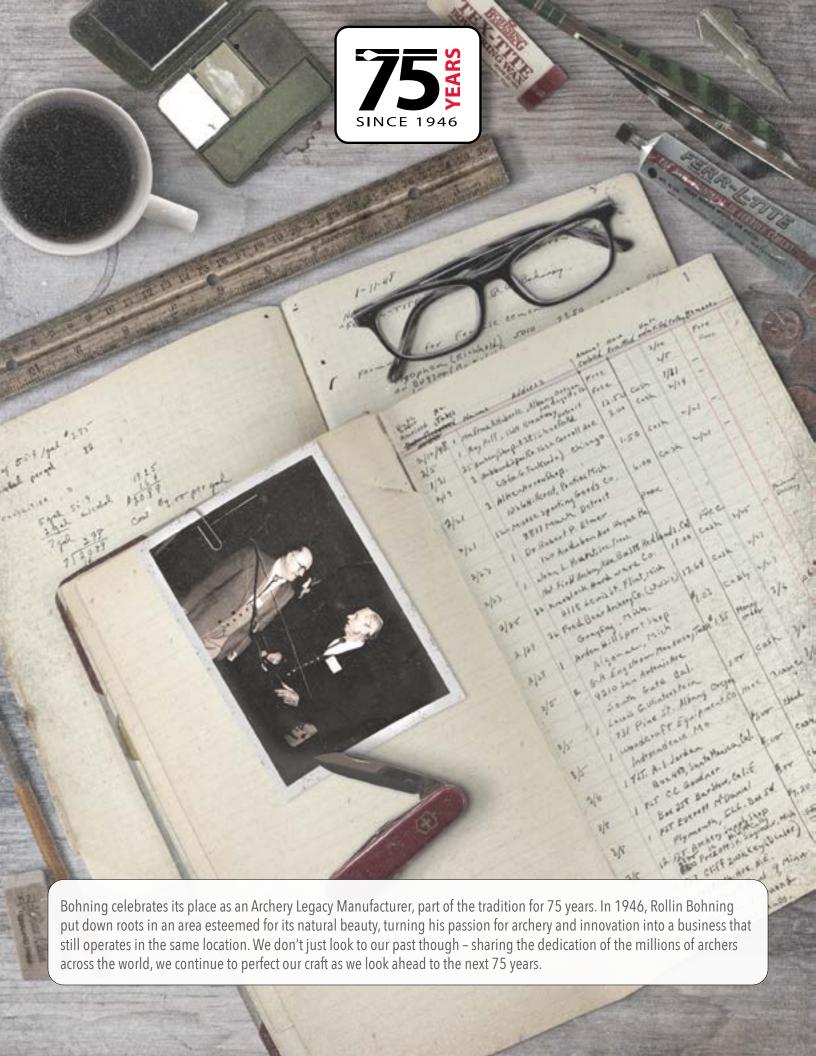









A TRADITION OF INNOVATION SINCE 1946



O PRO TIP:

BASIC FLETCHING INSTRUCTIONS:

- 1. Make sure that jig is correctly set up so that the clamp/arm seats firmly to the shaft for the entire length of the vane. Test this by dry fitting shaft and vane in jig without glue.
- 2. Place vane at the desired height in the clamp/arm to get desired distance from the nock.
- 3. For Fletch-Tite Platinum apply adhesive over the entire vane base. For Blazer Bond and Fletch-Fuse apply several dots of adhesive along the vane base and then use the tip of the bottle to spread the adhesive along the length of the base.
- 4. Clamp the vane in the jig for 5 minutes for Fletch-Tite Platinum, 20 seconds for Blazer Bond and 30 seconds for Fletch-Fuse.
- 5. Carefully remove arrow from the jig, and allow Fletch-Tite Platinum to cure for 24-48 hours, Blazer Bond and Fletch-Fuse for 2 hours before use.

ADHESION TROUBLE-SHOOTING

The best prevention for adhesion problems is to properly clean your arrows using Bohning SSR Powder. **DO NOT clean Bohning Vanes. Follow the correct clamp and cure time for the adhesive that you are using.

Make sure your fletching area and hands are free from spray lubricants, dust, pet hair, greasy food, chemicals or aerosol sprays. Use the correct amount of adhesive based on the adhesive type.

Clean your jig frequently. For Bohning jigs, a short soak of the arm/clamp/insert in acetone will remove excessive adhesive. Never use a knife to scrape off excess glue. This will cause damage to the jig.

IDENTIFYING FLETCHING ADHESION PROBLEMS

If fletching fails with adhesive remaining on the shaft but not on the fletch, this indicates an incompatibility between the adhesive and the fletch. Ensure the adhesive you have chosen is the correct choice for your fletch.

If the fletching fails with adhesive remaining on the vanes but not the shaft, this would indicate a problem with the arrow shaft. Start by cleaning the arrow shaft using the Bohning SSR Powder, making sure to rough up the shaft surface and then rinse with hot water and allow to dry. If the fletching fails with the adhesive remaining on both the vane and the shaft, this could indicate a setup problem with the jig, a damaged clamp, inadequate adhesive curing or a possible contamination on the shaft or vanes.

ADHESIVES



FLETCH-TITE PLATINUM®

- Solvent-based glue designed for vanes, feathers and swedged
- Works on carbon, aluminum, wood, fiberglass, wraps and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 49
- Industry standard for over 70 years

1301 – 3/4 oz Tube (22.1ml) **1356** – Pint (473.1 ml)

301040 – 40 pk

301030 - 200 pk

301006EQ-6 pk* **301040EQ** – 40 pk*

301030EQ – 200 pk*

1357 – Quart (946.4 ml)

1358 – Gallon (3.79 I)

*Packed to meet "Excepted Quantities" International ocean and air transportation requirements in order to reduce dangerous goods fees.

WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov.



BLAZER BOND®

- · Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 20 seconds, cure time 2 hours
- Use a very thin bead or several dots spread out for best adhesion
- Works well in humid conditions

301015 – 1/2 oz Bottle (17.2 ml)

301016 - 1 oz Bottle (29.6 ml)



CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH-TITE PLATINUM	Vanes Feathers Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	5 Minutes	Minimum: 24 hours 48 hours is best

USEFUL INFORMATION:

- Flexible (non-brittle) bond absorbs shock when shooting into a target repeatedly
- . Does not crack or become brittle.
- Along with other applications, use this glue on tip and tail of vanes or feathers for added
- Easy jig clean-up simply scrape glue off. Do not use knife or any sharp instruments
- Best in low humidity applications.
 Two year expiration on unopened tubes.
- . Do NOT store solvent-based adhesives in the refrigerator.

NAME APPLICATIONS		SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
BLAZER® BOND**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	20 Seconds	2 Hours

USEFUL INFORMATION:

- Fastest curing time.
- Instant, rigid-bonding glue.
 Medium viscosity (Bohning's most liquid CA glue).
- Begins curing on contact.
- · Best for high humidity application.
- One year expiration on unopened tubes.
- ** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks



FLETCH FUSE™

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 30 seconds, cure time 2 hours
- Budget-friendly

301025 - 1/2 oz Bottle (17.2 ml)



- Designed for points and inserts
- Works on all shaft types
- 48 hour cure time (72 hours if air is dry)

1317 - 1 oz Bottle (29.6 ml)



DISPENSER BOTTLES

- 2 oz (59.1 ml) bottle for use with Fletch-Tite Platinum
- Deluxe bottle has a smaller opening for easier/ cleaner application

1303 - Regular

1304 – 6 pk regular (red) replacement nozzles and caps

13031 - Deluxe

13032 – 6 pk deluxe (white) replacement nozzles and caps

NAME APPLICATIONS		SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)	
FLETCH FUSE**	Inserts		30 Seconds	2 Hours	

USEFUL INFORMATION

- Instant, rigid-bonding glue
- Medium viscosity (thicker than Blazer Bond)
- Begins curing on contact
- Best for high humidity application
- . One year expiration on unopened tubes
- ** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME APPLICATIONS		SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)	
INSERT IRON	Points Ca Inserts Ce Outserts Fib		n/a	48 Hours (72 Hours if air is dry)	

USEFUL INFORMATION:

- · Strongest glue.
- Insert Iron expands when curing. Hold point or insert in place while curing
- Cures with moisture best when applied in humid conditions
- One year expiration on unopened bottles
- . DO NOT store in the refrigerator

HOT MELT ADHESIVES



and the surfaces said



CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFTTYPE	CLAMPTIME	CURE TIME (before using arrow)	
FERR-L-TITE	Points Inserts Outserts	Cedar Aluminum	n/a	As soon as it has reached room temperature (approx. 5 minutes)	

USEFUL INFORMATION:

- Hot melt adhesive.
- No expiration.

FERR-L-TITE®

- Designed for points and inserts
- Recommended for wood and aluminum shafts
- Not for carbon shafts
- Heat-reversible on aluminum shafts—high temperature required
- Melting point of 350°F (176.7°C)
- Industry standard for 75 years

1309 – 12 Gram Stick

1339 – 1 lb. Brick (453.6 g)

1633 - 16 Sticks (Bulk)

31001 – 250 Sticks (Bulk)

FERR-L-TITE COOL FLEX®

- Designed for points, inserts and bushings
- Recommended for carbon, aluminum and fiberglass shafts
- Fully cured when it reaches room temperature
- Use hot water for adjustment, replacement or removal
- Melting point of 280°F (137.8°C)

1308 – 12 Gram Stick

1368 - 1 lb. Brick (453.6 g)

13081 – 16 Sticks (Bulk)

13082 – 250 Sticks (Bulk)

ALCOHOL
BURNER

- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

1315 - Burner

1316 - Replacement wick

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE COOL FLEX	Points Inserts Outserts Pin Bushings	Carbon Aluminum Fiberglass	N/A	As soon as it has reached room temperature (approx. 5 minutes)

USEFUL INFORMATION:

- Hot melt adhesive (low melt)
- Heat reversible on aluminum shafts flame required
- No expiration.

TAPE



PREMIUM FLETCHING TAPE

- Designed for feathers and mylar vanes
- Works on all shaft types
- Length 60' (18.3m), width 0.188" (4.8mm)
- Machine-cut without lubricant so no dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers



FLETCHING TAPE DISPENSER

- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris
- Refillable; includes 1 roll of premium fletching tape
- Screw holes for easy mounting

801099

NAME	APPLICATIONS	SHAFTTYPE CLAMP TIME		CURE TIME (before using arrow)	
FLETCHING TAPE	Feathers Mylar Vanes	All	N/A	Immediate	

USEFUL INFORMATION

Pressure sensitive adhesiveNo expiration



THE STRIPPER

- Strips your arrow shaft of fletchings, glue, and arrow wraps
- Safe cutting angle for all shaft types
- Replacement blades sold separately

1524 – Stripper **15240 –** Blades: 3pk



THE STRIP-PRO

- 2 blades for ergonomic versatility
- Heavy-duty handle and steel blade
- Easily strip your arrow shaft of fletchings, glue, and arrow wraps
- Replacement blades sold separately

801025LM – Strip-Pro **801026 –** Blades: 3pk



SSR

- Concentrated cleaning powder removes dirt, grease, residue and contaminants
- For carbon, aluminum and fiberglass shafts
- Use on a scour pad with hot water to scrub, then rinse

801052 – Single-use pk - 1 tsp (4.9 ml) **801053** – Shaker bottle -2.65 oz (78.4 ml)



PRO TIP

TO REMOVE FLETCHINGS:

Use "The Stripper" or the "Strip-Pro" by Bohning to strip the fletchings from arrow shafts. Clean with SSR powder on a scour pad to prepare for new fletching.



PRO TIP:

3 WAYS TO REMOVE WRAPS:

- 1. Use "The Stripper" or the "Strip-Pro" to remove the wrap.
- 2. Use a hair dryer to soften the adhesive and peel the wrap.
- 3. Use boiling water to soak the wrapped arrow shafts in and peel the wrap off once softened.

To remove remaining wrap adhesive, use SSR powder on a scour pad in hot water to scrub off.

SHOOTER STOOL

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

701058BK – Stool with arrow tubes/umbrella holder

701055BK – Stool only

PRO TIP: STOOL CAPACITY: 300 pounds (136 kg)





BUILT IN COOLER



SLIP-ON ARMGUARD

- Durable yet flexible and soft compression-fit material
- Easy on and off; protects the entire forearm

801009

	SLIP-ON ARMGUARD SIZING (APPROXIMATE)						
SIZE LENGTH				SMALL END STRETCHED	LARGE END STRETCHED		
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)		
M 9" (22.9 cm)		7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)		
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)		






WEB ARMGUARD

- Open design for maximum ventilation
- Durable and flexible, with adjustable elastic bands for easy on and off

801040BK



D-FLECTOR ARMGUARD

- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center

801092

SOLID COLOR CHOICES







3-STRAP ARMGUARD

- Made of heavy-duty cordura double stitched to prevent fraying
- Protects arm and holds loose clothing away from bow strings
- Adjustable quick disconnect buckle straps

1689

ADULT BOW CASE

- Dimensions: 44.5" (113.0 cm) x 19.5" (49.5 cm)
- Fits bows up to 37" (94cm) axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura® Nylon

701037



GYBL Gray and Blue



GYRD







ADULT BOW CASE INTERIOR - COLOR MAY VARY Interior dimensions: 43.5" x 18" (110.5 cm x 45.7 cm)

THE SHELTER

BOW CASE

- Dimensions: 46" (116.8 cm) x 18.5" (47.0 cm)
- 4 outer pockets, including one arrow pocket

701045CAMO - The Shelter, Sling/Case Combo

701043CAMO - Case Only

SLING

- Fits bows from 28" (71 cm) to 38" (97 cm) axle to axle
- 2 outer accessory pockets
- 2 end clips for added security

701044BK – Bow Sling Only







SHELTER BOW CASE INTERIOR Interior dimensions: 44.5" x 18" (113.0 cm x 45.7 cm)









YOUTH BOW CASE

- Dimensions: 40" (101.6 cm) x 15.8" (40.1 cm)
- Fits most youth bows (including Genesis*)
- Outer arrow storage pocket and 3 zippered interior pockets

701036





YOUTH BOW CASE INTERIOR Interior dimensions: 38" x 15" (96.5 cm x 38.1 cm)

TUBE QUIVER

- Dimensions: 19" x 1.5" (49.5 cm x 3.8 mm)
- 2 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 STD sized arrows
- Ambidextrous
- Mesh storage pocket



(2) Arrow Tubes: 18"+ (457 cm) long - 1.2" (30 cm) I.D.





ADULT TARGET QUIVER

- 4 high capacity, durable, solid base arrow tubes
- Each tube easily fits 6 STD sized arrows
- 2 zippered storage compartments:
- Easy to access mesh and pencil storage areas
- Constructed with premium Cordura® and Ripstop nylons
- Superior durability and water repellent
- Fits up to 3" (76 cm) belt

701041BK



ACCESSORY POUCH

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant
- Strong and comfortable belt Loop - Fits up to 2.5" (64 cm) belt

701040BK



ADULT FIELD QUIVER

- Can be right or left handed
- Double zippered, large interior pocket
- Adjustable arrow angle
- Loop for bow pod
- Multiple pencil/pen locations

701042BK





Arrow Tubes:
17" (432 cm) long - 1.2" (30 cm) l.D.
Main Pocket:
11" (279 cm) x 5" (127 cm)
Upper Pocket:
4.5" (114 cm) x 5" (127 cm)



Dimensions:

6.25" (159cm) Width 5.75" (146cm) Height 3.5" (89cm) Depth







POCKET QUIVER

- Dimensions: 3.75" x 5.125" x 1.25" (95.3 mm x 133.4 mm x 31.8 mm)
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Made in USA

201035BK - Pocket Quiver

Replacement Parts 201036 - Body **201037 -** Clip **201038 -** Retainer Cap




AVAILABLE SPRING 2021







Securely holds 6 arrows or bolts

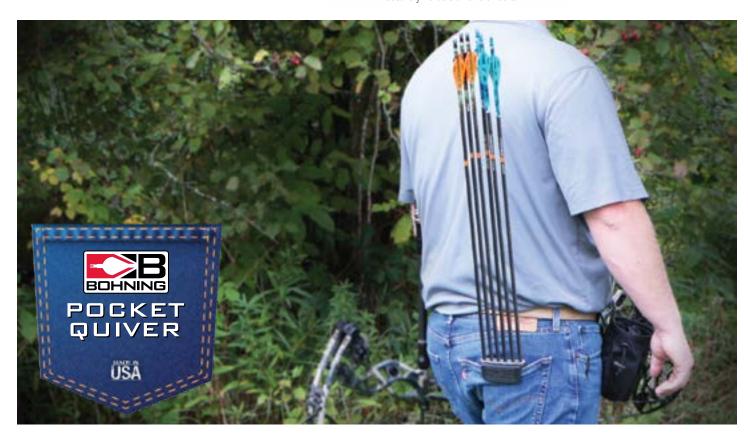

BRUIN

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with the Lever-Lock mounting system

201030 – Indicate hood and liner color













LINER COLOR CHOICES








BK Black

* Red liner available only with black or carbon fiber hoods



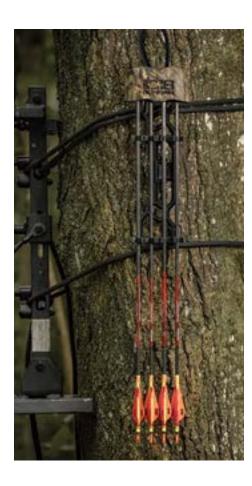

LYNX®

- Dual-retainer quiver
- Molded hood and liner for quiet storage of any broadhead style
- Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

1038 – Black

201013RX - Realtree® Xtra

201013RE - Realtree Edge®

201013MOC – Mossy Oak® Break-Up Country

HOOD COLOR CHOICES













LEVER LOCK

- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click)

1073 – Lever Lock





UNIVERSAL ARROW BOX

- Each box holds 12 arrows, up to 36" (91 cm)
- Dimensions: 36.5" x 6" x 2.5" (93 cm x 15 cm x 6 cm)

1623 - 50 pk



"BOA" AND "PYTHON" ARROW PADS

- Boa holds 12 arrows of any size
- Python holds 12 arrows
 Sizes .219" (5.56 mm) to .359" (9.12 mm)

16092 – Boa **801047 –** Python



ARROW PEN FERRULES

- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to PaperMate® 1.0mm (not included)

990004BK



Turn arrow scraps into fletching showpieces. Our Arrow Pen Ferrules easily turn a broken arrow piece into a sellable product, or an advertising tool.





BROADHEAD WRENCH

- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point

1619



BOW GRIP/SIGHT WINDOW PAD

- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak® Break-Up Infinity

1602 - 2 Pads



WIND CHECK

- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy onehand use

1612 – 0.21 oz (6 grams)



ARROW LUBE

- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based

301023 - 1.18 oz (35 ml) tube

CROSSBOW



CROSSBOW LUBE KIT

- Includes:
- 1 tube of Lightning Lube 1.18 oz (35 ml)
- 1 tube of Xccelerator Wax 0.57 oz (16.1 grams)

801005



LIGHTNING LUBE™

- Silicone-based, odorless rail lube
- No-mess foam applicator
- Provides a protective film for reduced friction and increased velocity

1363 – 1.18 oz (35 ml) tube **941019** – 16 pk bulk **941019BOWL** - Bowl and 24 pk





TOP MOUNT

- Parallel quiver mounting system
- Installs easily to the right or left side of the sight rail without removing the scope
- Slim and adjustable design allows for easy access to arrows and reduction in forward weight of crossbow
- Includes both allen head and thumb screw

801012



MULTI-FLETCHER®

- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Capable of fletching crossbow bolts up to 0.42" (10.7 mm) OD
- Can fletch 1° to 3° right, 1° to 3° left, or straight
- See page 19 for more information

601055 – Multi-Fletcher®



CROSSBOW TOWER®

- Capable of fletching crossbow bolts up to 0.35" (8.9 mm) OD
- Can fletch bolts either 1° right offset or 3° right helical
- See page 18 for more information

601001 - Crossbow Tower®

CROSSBOW



BOLT™ VANE

• See page 13 for more information

101033 – 36 pk **101034** – 100 pk **101035** – 1000 pk



CROSSBOW SERVING THREAD

• See page 25w3 for more information

801011BK





CROSSBOW NOCKS

• See page 17 for more information

.300" Half Moon Nock (7.70 mm)

401008 – 12 pk

401009 – 100 pk

401010 - 1000 pk

.300" Flat Nock (7.70 mm)

401014 - 12 pk

401015 – 100 pk

401016 – 1000 pk



TRADITIONAL

PROFESSIONAL CRESTING KIT

- The kit includes:
- One crester (made with maple wood)
- Six 1 oz jars of Crest-Lac paint: black, red, yellow, blue, silver, and gold
- Four paint brushes:
 Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with English and metric doubles as pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V

801083 – Cresting Kit **801084** – Crester Only



DIP KIT

- Includes:
- 1 glass dip tube
- 1 arrow hanger
- 2 pints (946 ml) of white Crest-Lac
- 2 pints (946 ml) of clear Crest-Lac
- 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

801094 - Dip Kit

801085 – Cresting Kit and Dip Kit Combo

801095 – Dip Tube

801098 – Arrow Hanger

801100 – Dip'n Plug Ring





CROWN DIPPING AND CRESTING

Bohning offers many options for this purpose, ranging from clearcoats to white to colors, in both solvent-based and water-based finishes. Bohning offers water-based Crest-Lac paint, which is very low odor, easy to thin to your desired consistency using distilled water, and is easy to clean up.

Bohning's Fletch-Lac paint is the original solvent-based arrow paint, it is time tested, covers all arrow surfaces extremely well with minimal coats, and thins well with Bohning Fletch-Lac Thinner.

Crown dipping for both Fletch-Lac and Crest-Lac paint, follow the steps below for the best arrow finish:

- 1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For Carbon or Aluminum arrows, scrub shaft surface with Bohning SSR powder on a scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
- 2. Pour paint into dip tube making sure to adjust the viscosity (thickness) with the correct thinner for the paint that you are using. Stir paint, allow to sit for 20 minutes, pop any surface bubbles in the paint.
- 3. Hang arrows using the Bohning Arrow hanger.
- 4. Plug hollow arrows with Bohning Dip'n Plug ring.
- 5. Dip arrows to the desired depth in the paint, pull out of paint until paint starts to drip, then dip the arrows back into paint. Allow the paint to stream off the shafts until it is just dripping and then hang to dry over a surface that can collect the excess paint.
- 6. Allow paint to dry completely before coating with another paint or clearcoat. If coating with another paint, it is recommended that you lightly sand the painted surface of the shaft and then wipe with a tack cloth.
- 7. Pour leftover paint back into cans to save for the next round of arrows.

Cresting for both Fletch-Lac and Crest-Lac paint.

- 1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For carbon or aluminum arrows, scrub the shaft surface with Bohning SSR powder and a dish scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
 - c. For Dipped/Painted arrow shafts: Wipe dipped/painted end of shaft with a tack cloth.
- 2. Mix desired paints. Determine your desired cresting pattern.
- 3. Place arrow onto The Bohning Crester, making sure to put the nock end tight against the arrow stop.
- 4. Proceed with cresting the arrow. Leave the crester spinning with the arrow in place until the paint is dry.
- 5. If a clearcoat top coat is desired for the arrow, using Crest-Lac clear is strongly recommended as it will not dissolve the cresting lines.

For unfinished wooden arrows, a finish is essential for the entire arrow shaft.





FLETCH-LAC

- Industry standard for over 50 years top choice of custom arrow shops worldwide!
- Solvent-based cresting paints that dry to a hard, chip-resistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

1412 – 1 oz Jar (17.2 ml)

1105 - Pint (473.1 ml)

1106 – Quart (946.4 ml)

1107 - Gallon (3.79 I)

GLOSS COLOR CHOICES















FLORESCENT COLOR CHOICES







MATTE COLOR









CREST-LAC

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

301011 - 1 oz Jar (17.2 ml)

301014 - Pint (473.1 ml)

301012 - Quart (946.4 ml)

301013 – Gallon (3.79 I)

GLOSS COLOR CHOICES





















FLORESCENT COLOR CHOICES











METALLIC COLOR CHOICES











PRO TIP:

If thinning is desired, use distilled water **NOT** paint thinner



FLETCH-LAC THINNER

- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

1131 - Pint (473 ml)

1132 - Quart (946.4)

1133 – Gallon (3.79 I)



FLETCH-LAC SEALANTS

CLEAR AND BLUE CLEAR

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

1124 – BC/CL Pint (473 ml)

1125 - BC/CL Quart (946.4)

1126 – BC/CL Gallon (3.79 I)

SUPERCOAT

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

1120 – Supercoat Pint (473 ml)

1121 – Supercoat Quart (946.4)

1122 – Supercoat Gallon (3.79 I)



FEATHER-DRI

- Protect your fletchings from the weather
- Colorless, odorless, water-repellent powder
- Includes bag to shake powder onto fletched feathers
- Environmentally safe





FEATHER TOWER®

• See page 16 for more information

601010

SHIRTS





ZIP-UP PULL-OVER

- Made of high quality, moisture-wicking material
- Sm-3XL

701049GY/WH – Gray/White **701049GY/RD** – Gray/Red

75TH ANNIVERSARY SHIRT

- Fabric Content 100% polyester, 3 oz
- Moisture management/antimicrobial performance fabric
- Sm-3XL

701075 – Red/White











NEON GREEN JERSEY

- Limited Edition "It's in Our Vanes" jersey
- High quality, breathable fabric
- YL-3XL

701038NG

SHOOTER JERSEY

- Made of high quality, moisture-wicking material
- Option to customize
- Sm-3XL

HATS

NEW



GREEN MESH

- Mesh back
- Adjustable snap back

701043GR



LEATHER PATCH

- Mesh back
- Adjustable snap back701043LTH



DISTRESSED BROWN

- Bohning's best sellerMesh back
- Adjustable snap back

701043TR



REALTREE®

- Hook and loop closure
- 701004RT

FISHBOWL DISPLAY

1630BOWL - Tex-Tite - 24 pk **1631BOWL - Seal-Tite - 24 pk 941019BOWL -** Lightning Lube - 16 pk 1634BOWL - Xccelerator - 16 pk





STOCKED SNAPFIT™ DISPLAY

- Shelf capacity: 5 lbs (2.3 kg) per 4" panel
- Hook capacity: 1 lb (.45 kg) per hook
- Made from engineeringgrade, recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for nonmarring stability
- Slots in column caps accommodate standard foam board signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays



CALL A BOHNING REP FOR MORE DETAILS AND ORDERING: 231 - 229 - 4247



DISPLAY - 8 X 8

- Includes:
 - Sixteen 16" columns
- Twenty-four 8" plates
- Includes four stabilizing feet
- Forty-eight 3" hooks
- Four 8" shelves



Includes:

– Sixteen – 16" columns

SNAPFIT ™

DISPLAY - 8 X 16

- -Twelve 16" plates
- -Twelve 8" plates
- Includes four stabilizing feet
- Sixty-four 3" hooks
- Eight 8" shelves



SNAPFIT ™ **DISPLAY — 16 X 16**

Includes:

901053

- Sixteen 16" columns
- Twenty-four 16" plates
- Includes four stabilizing feet
- One hundred 3" hooks
- Eight 16" shelves



SNAPFIT™ DISPLAY TABLETOP

• Includes:

- One 16" column
- Includes one stabilizing foot
- -Ten 3" hooks

901050



ALL DISPLAYS:



901051

ADHESIVES

1304 – Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)

13032 – Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)

1316 - Alcohol Burner Replacement Wick

1134 - Platinum Thinner* - 1 Pint (473.1 ml)

*PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING. ONLY USE **PLATINUM THINNER** WITH PINT, QUART, OR GALLON SIZES OF PLATINUM THAT HAVE THICKENED WITH TIME.

CRESTING AND DIPPING

1400 – Hair Line Cresting Brush

1401 – 1/8" (3.18 cm) Cresting Brush

1402 - 1/4" (6.35 cm) Cresting Brush

1403 - 1/2" (12.7 cm) Cresting

801095 - Dip Tube

801098 - Arrow Hanger **801100** - Dip'n Plug Ring

Brush

FLETCHING JIGS

Blazer® Jigs and The Big Jig

1319 – Clamp Release Tape, 3 pieces

13192 – Clamp Release Tape Bulk Pack, 21 Pieces

8250 - Blazer Straight Clamp

8251 - Blazer 3° Right Helical Clamp

8361 - Big Jig 3° Right Helical Clamp

8362 – Big Jig 1° Right Offset Clamp

601004 - Crossbow Receiver / Adapter

601009 - 4 Fletch Disk Adapter

Multi-Fletcher®

601056 - Multi-Fletcher Clamp

601057 - Insert, 3° Right Helical

601058 - Insert, 1° Right offset

601059 - Insert, Straight

601060 - Insert, 1° Left Offset

601061 - Insert, 3° Left Helical

601062 – Insert, Feather 2° Right Offset

601063 – Insert, Feather 2° Left Offset

Pro Class Jig

1351 - Straight Clamp

1352 - Right Clamp

1353 – Left Clamp

601020 - 1" (25cm) Vane Fletching Clamp - Griffin Vane

601004 - Crossbow Receiver / Adapter

Tower® Jigs

601011 – Center Post for .246 (6.25 cm) ID (Standard size)

601012 - Center Post for Pin Adapter

601013 – Center Post for .167" (5.50 cm) ID (F Nock size)

601014 - Center Post for .204" (5.18 cm)ID (A Nock size)

601015 - Center Post for Crossbow Bolts

601016 – Center Post for Swedged-end Arrows

601030 - Center Post for .231" (5.87 cm) ID (H.E. Nock size)

1200 - Arms, 1° Right Offset (red), set of 3

1201 - Arms, Straight (gray), set of 3

1202 - Arms, 3° Helical (black), set of 3

601007 – Arms, Impulse Straight (yellow), set of 3

601024 - Arms, Mylar Straight (gray w/ red clip), set of 3

601037 – Arms, 1° Left Offset (orange), set of 3

601038 - Arms, 3° Left Helical (purple), set of 3

601008L – Arms, Feather Left Wing (green), set of 3

601008R - Arms, Feather Right Wing (blue), set of 3

80211 – Tower Spacers, set of 3

601017 – Pressure Ring, Small (red)

601018 - Pressure Ring, Large (lime)

601036 - Pressure Ring, X-Large (orange)

1319 – Clamp Release Tape, 3 pieces

13192 - Clamp Release Tape, Bulk Pack (21 Pieces)

SERVER

801024BW - Mini-Server Replacement Spool with thread, 2 pk

QUIVERS

Bruin Quiver

201031 – Retainer Set

201032 – Tree Hanging Loop

1073 – Lever Lock

Lynx® Quiver

1045 - Retainer Set for small .166" (4.22 cm) and .204" (5.18 cm) arrows

10382 - Retainer Set for standard-size arrows

STRIPPER TOOLS

15240 - The Stripper Blades, 3 pk

801026 - The Strip-Pro Blades, 3 pk

SHOOTER STOOL

701057 – Arrow tubes with clips

Pocket Quiver

201036 - Body

201037 - Clip

201038 - Retainer Cap