

# CONTOUR

**FRAME**

- + WRAP-AROUND
- + NON-SLIP BRIDGE
- + SPORTIVE DESIGN
- + LIGHTWEIGHT



**TEMPLES**

- + NON-SLIP TIPGRIP TEMPLES

**LENS**

- + PLATINUM® ASAF COATING

VERSIONS



**SMOKE**  
#PSSCONT443B



**CSP**  
#PSSCONT13B



+ MICROFIBER POUCH INCLUDED

DESCRIPTION

*21 g of strength: sturdy, protective, stylish, comfortable and lightweight. CONTOUR is the most extreme everyday sun and safety protection eyewear*


TECHNOLOGIES

**PLATINUM® (P) ASAF Coating**

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

**CSP**

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments. CSP is also combined with the exclusive PLATINUM® coating that sustainably combats fogging.

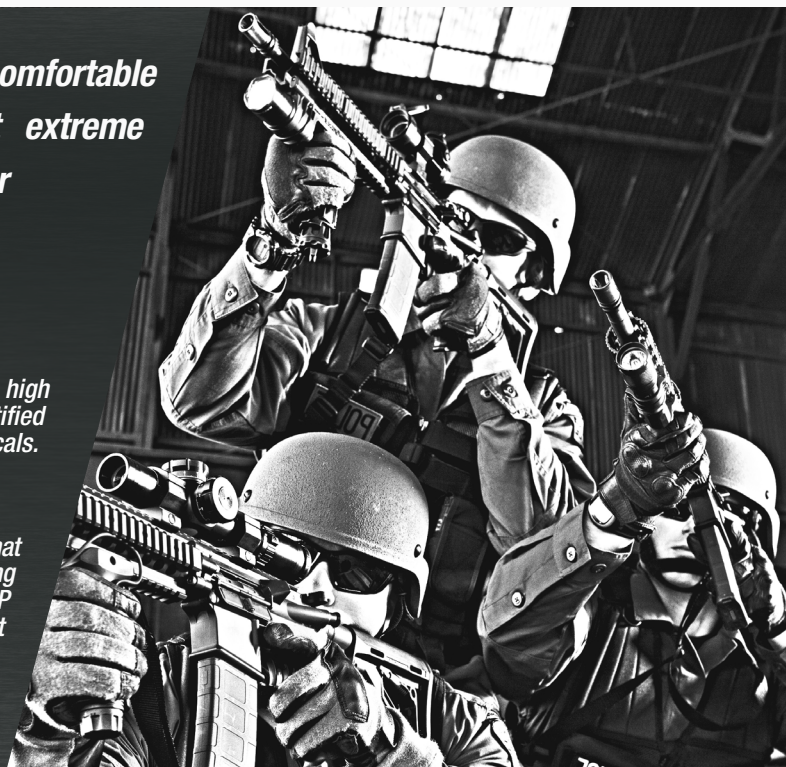



# CONTOUR



MODEL	VERSIONS	REFERENCES	LENS MARKING	FRAME MARKING	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATINGS
<b>CONTOUR</b>	Smoke	PSSCONT443B	5-2,5  1 FT KN c€	EN166 FT c€	781.2 km/h - 217.8 m/s	ANSI Z87.1 MIL-PRF-32432A	Anti-scratch/anti-fog
	CSP	PSSCONT13B	5-1,4  1 FT KN c€	EN166 FT c€	788.4 km/h - 219.1 m/s	ANSI Z87.1 MIL-PRF-32432A	Anti-scratch/anti-fog

## Lens markings

### Optical class symbols:

1. Continuous work

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

c€ European standard Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

## Frame markings

### Standards :

**EN166.** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

c€ European standard Manufacturer name

	PSSCONT443B	PSSCONT13B
<b>EAN13 Unit pack</b>	3 660 740 012 533	3 660 740 012 540
<b>EAN13 Carton</b> (number of unit per master pack)	3 660 740 212 537 (100 units)	3 660 740 212 544 (100 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.  
Storage: All products must be stored in a dry and clean environment.*

CONTOUR	
<b>LENSES</b>	PC - 2.2 mm - Curve 8
<b>FRAME</b>	PC
<b>TEMPLES</b>	Nylon + TPE
<b>STRAP</b>	Not applicable
<b>FOAM</b>	Not applicable
<b>Country of origin</b>	Taiwan

