

RUSH+



FRAME
 + UPPER PROTECTION
 + NON-SLIP NOSE BRIDGE
 + SINGLE-LENS FRAME

TEMPLES
 + BI-MATERIAL TEMPLES FOR MORE COMFORT
 + FOAM AND STRAP KIT (OPTION)

LENS
 + PLATINUM® ASAF COATING
 + PANORAMIC FIELD OF VISION



CLEAR
 #PSSRUSP064B



SMOKE
 #PSSRUSP443B



CSP
 #PSSRUSPC13B



STRAP & FOAM
 #RUSHKITFS




+ MICROFIBER POUCH INCLUDED

Sporty, RUSH+ provides a panoramic field of vision and offers an attractive design thanks to its flexible co-injected temples. Also ultra-light, RUSH+ ensures perfect optical quality and ultimate comfort.

PLATINUM® (P) ASAF Coating
 Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

CSP
 This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.

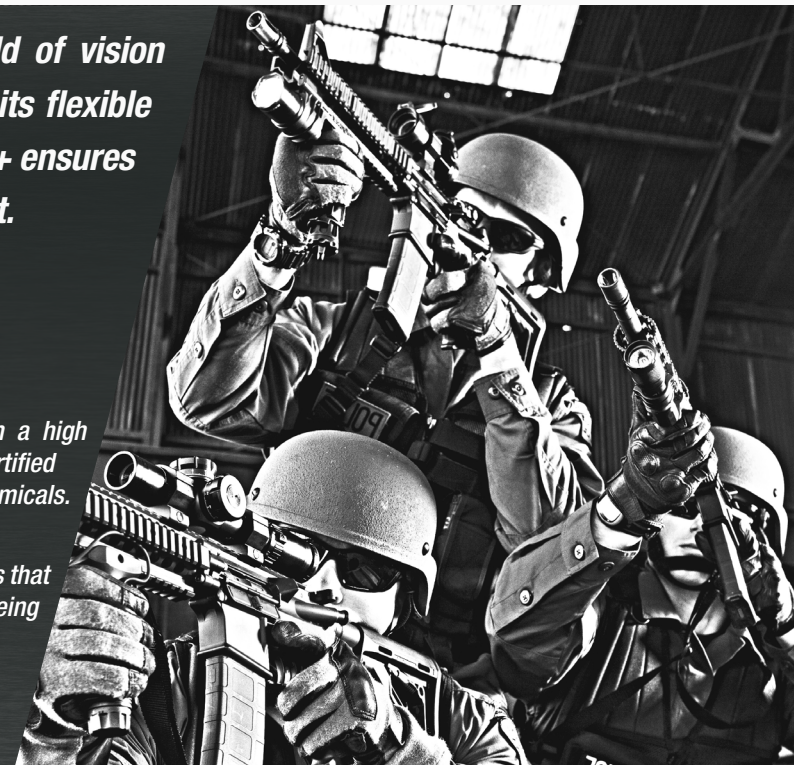

RUSH+

MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
RUSH+	■ Black	Clear	PSSRUSP064B	2C-1.2 1 FT KN	EN166 FT	784.8 km/h - 218.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF
		Smoke	PSSRUSP443B	5-3.1 1 FT KN	EN166 FT	774km/h - 215.9 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF
		CSP	PSSRUSPC13B	5-1.4 1 FT KN	EN166 FT	756km/h - 210.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF
	Foam & Strap Kit	-	RUSHKITFS	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

CE European standard Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

CE European standard Manufacturer name

	PSSRUSP064B	PSSRUSP443B	PSSRUSPC13B	RUSHKITFS
EAN13 Unit pack	3 660 740 012 458	3 660 740 012 465	3 660 740 012 472	3 660 740 006 488
EAN13 Inner pack (number of unit per inner pack)	-	-	-	3 660 740 106 485 (20 units)
EAN13 Carton (number of unit per master pack)	3 660 740 212 452 (125 units)	3 660 740 212 469 (125 units)	3 660 740 212 476 (125 units)	3 660 740 206 482 (240 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.
Storage: All products must be stored in a dry and clean environment.*

RUSH+	
Lens	PC - 2.3 mm - Curve 9
Temples	PC + TPR
Strap	Nylon - 15mm
Foam	SBR + Nylon
Spare lens	No
Country of Origin	Taiwan

