

# RUSH+ SMALL

**bolle**  
SAFETY



**FRAME**

- + UPPER PROTECTION
- + ADAPTED TO NARROW FACES
- + SINGLE-LENS FRAME



**TEMPLES**

- + BI-MATERIAL TEMPLES FOR MORE COMFORT
- + FOAM AND STRAP KIT (OPTION)

**LENS**

- + PLATINUM® ASAF COATING
- + PANORAMIC FIELD OF VISION

VERSIONS



**CLEAR**  
#PSSRUSP0652B



**SMOKE**  
#PSSRUSP4442B



**CSP**  
#PSSRUSPC142B



**STRAP & FOAM**  
#RUSHKITFS



26 g

+ MICROFIBER POUCH INCLUDED

DESCRIPTION

The wraparound RUSH+ Small was specifically designed for narrow faces. Light and with a wide field of view, this model offers a perfect optical quality and unique comfort in all situations.


**PLATINUM® (+P) ASAF Coating**

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

**CSP**

This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments.

TECHNOLOGIES

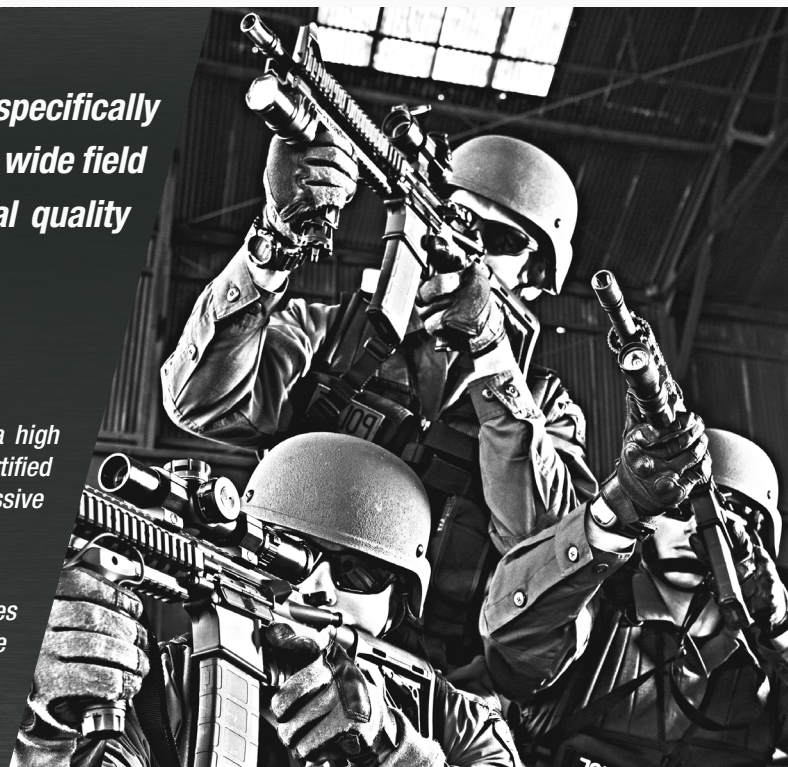

# RUSH+ SMALL

bolle  
SAFETY

MODEL	FRAME	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
<b>RUSH+ SMALL</b>	■ Black	● Clear	PSSRUSP0652B	2C-1.2 ☞ 1 FT KN C€	☞ EN166 FT C€	799.2 km/h - 222.9 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	■ Black	● Smoke	PSSRUSP4442B	5-3.1 ☞ 1 FT KN C€	☞ EN166 FT C€	828 km/h - 230.4 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	■ Black	● CSP	PSSRUSPC142B	5-1.4 ☞ 1 FT KN C€	☞ EN166 FT C€	763.2 km/h - 212.2 m/s	ANSI Z87.1 MIL-PRF-32432A	ASAF ☞
	Foam & Strap Kit	-	RUSHKITFS	-	-	-	-	-

## Lens markings

### Optical class symbols:

1. Continuous work

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard ☞ Manufacturer name

## Frame markings

### Standards :

**EN166.** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

### Others symbols:

C€ European standard ☞ Manufacturer name

Bolle Safety product approval certificates to CE standards will be sent on request.

	PSSRUSP0652B	PSSRUSP4442B	PSSRUSPC142B	RUSHKITFS
<b>EAN13 Unit pack</b>	3 660 740 012 489	3 660 740 012 496	3 660 740 012 502	3660740006488
<b>EAN13 Inner pack</b> (number of unit per inner pack)	-	-	-	3660740106485 (20 units)
<b>EAN13 Carton</b> (number of unit per master pack)	3 660 740 212 483 (125 units)	3 660 740 212 490 (125 units)	3 660 740 212 506 (125 units)	3660740206482 (240 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.*

*Storage: All products must be stored in a dry and clean environment.*

RUSH+ SMALL	
<b>Lens</b>	PC - 2. mm - Curve 9
<b>Temples</b>	PC + TPR
<b>Strap</b>	Nylon - 15mm
<b>Foam</b>	SBR + Nylon
<b>Spare lens</b>	No
<b>Country of Origin</b>	Taiwan

