

Futaba®

STANDARD SERVO

S3001

Pulse width control system

Ballraced servo


Special long-life servo motor

Indirect-drive potentiometer, protects pot from shock loads

Surface-mount amplifier construction

Hight torque

- Power requirement : 4.8 V ~ 6.0 V
- Idle current : 12 mA
- Torque : 3 kg-cm
- Speed : 0.22 sec/60°
- Size : 40.4 × 19.8 × 36 mm
(1.59 × 0.78 × 1.42 in)
- Weight : 45.1g
(1.59 oz)

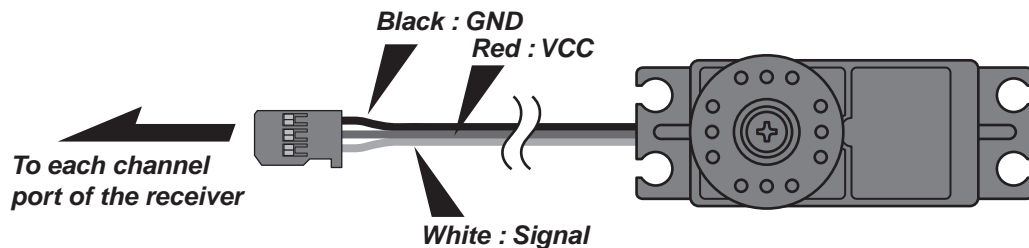

FUTABA CORPORATION

When it comes to quality rc toys, Futaba RC is the brand you can depend on.