

Futaba®


STANDARD SERVO

S3003

Pulse width control system

(standard servo)

- Power requirement:
4.8V or 6V (common with receiver) Current drain: 8mA (at 6V / Idle)
- Output torque: 3.2kg-cm (at 4.8V)
- Operating speed: 0.23sec/60 degree (at 4.8V)
- Size: 40.4x19.8x36mm
- Weight: 37.2g

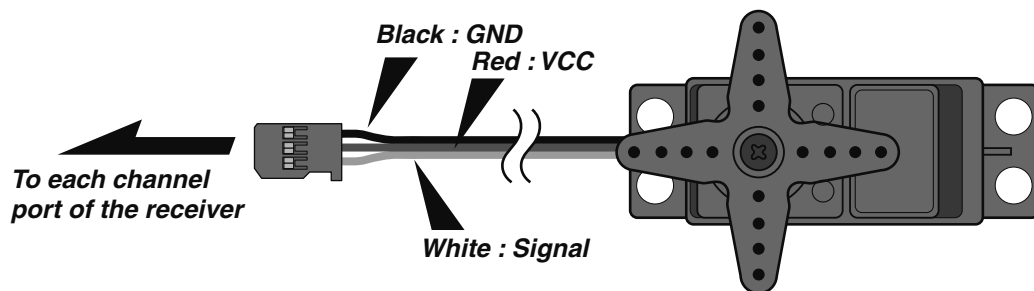

FUTABA CORPORATION