
GAMO® BI-POD PARTS & FUNCTIONS



GAMO® BI-POD INSTALLATION & OPERATION INSTRUCTIONS



1. To open the Bi-Pod Barrel Fastener Ring depress the Barrel Fastener Spring Release Latch. The Barrel Fastener Ring will unlock and rotate open. Insert rifle barrel into the Bi-Pod and close the Barrel Fastener Ring until it locks with a "click."

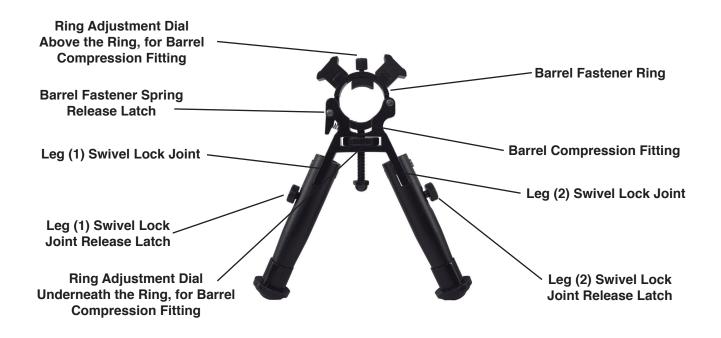

2. All rifle barrels have a different outer diameter, so the Bi-Pod will need to be tightened for a secure fit. To tighten, first rotate the adjustment dial underneath the ring to move the barrel compression fitting upward until the barrel is approximately in the center position of the ring. Next, rotate the dial on top of the ring to move the compression fitting downward and closer to the barrel. Continue rotating until the compression fitting is snug on the barrel (Figure A).





3. The Gamo Bi-Pod's legs feature two positions, down for bipod shooting and up for storage or easier cocking of your gun. To unlock the legs simply depress the Swivel Lock Joint Release Latch and reposition the leg.



