

FEEL THE DIFFERENCE



LEW'S

2022

LEW'S FISHING / 2022 PRODUCT GUIDE

MEET THE PROS

ANDY MONTGOMERY

KEVIN VANDAM

MARK ROSE

MARK ZONA

GREG HACKNEY

WALLY MARSHALL

BRIAN LATIMER

DAVID FRITTS

HANK PARKER

MARK DAVIS

JAMES NIGGEMEYER

ANDY MORGAN

MELINDA HAYES

JOHN GARRETT

CHAD MORGENTHALER

JAMEY CALDWELL

MARK MENENDEZ

JARED MCMILLAN

BILL McDONALD

SHAW GRIGSBY

MATT AREY

JEFF SPRAGUE

BILL LOWEN

FEEL THE DIFFERENCE

SINCE 1949

From our heritage, we honor Lew's original commitment for product innovation and excellence, and the ongoing commitment to have cutting-edge technology.

Team Lew's

NEW FOR 2022
LEW'S PRODUCTS

2022

REELS



NEW BB1 PRO
PAGE 9



NEW CUSTOM PRO
SLP
PAGE 12



NEW HYPERMAG
MAGNESIUM
PAGE 24



NEW TOURNAMENT LITE
LFS
PAGE 16



NEW CUSTOM SLP
PAGE 13



NEW SUPERDUTY
LFS
PAGE 20

RODS



NEW SIGNATURE SERIES PAGE 32

NEW XD CRANKING SERIES PAGE 34

NEW WALLY MARSHALL CLASSIC SERIES PAGE 46

NEW MODELS LASER SG SPINNING COMBO PAGE 53

COMBOS

NEW FOR 2022

PERFORMANCE INNOVATIONS

LEW'S REEL TECHNOLOGIES



P2 SUPER PINION®

Bearing supported pinion gear which provides precise alignment and solid stability, resulting in a smoother operation and extended gear life. The P2 Super Pinion is supported by a bearing on each end of the spool shaft and a bushing in the middle for 3-points of contact.



SPEED DIAL®

Allows you to easily identify the line type and pound test on the reel. Use a coin to turn the inner dial to line up the indicator arrows marked: M - Monofilament, F - Fluorocarbon, B - Braid with the correct pound test line.

SPEED KEEPER®

Hook keeper gives convenience a whole new meaning. Swing it out and secure your hook, swing it back and it conveniently tucks back under the reel when not in use. Allows Texas rigged baits to stay rigged, preventing plastic damage and minimizes reel scratches.



SPEED GEARS®

Cut on the finest Hamai CNC machines, resulting in precise gear interface for smooth cranking power and less wear, making your reel last longer.

BRAKING SYSTEMS

LEW'S BRAKING TECHNOLOGY



MSB Multi-Setting Brake

MULTI-SETTING BRAKE (MSB)

Features both an externally-adjustable, full-release magnetic braking system as well as an internally adjustable centrifugal brake system. The magnetic brakes give consistent braking throughout the entire cast and are adjusted by the palming sideplate dial. The centrifugal brakes provide initial braking at the beginning of the cast to reduce backlash and can be turned off to reduce braking by removing the palming sideplate and pushing the white pin(s) towards the center of the spool until they click. To turn them back on push the white pin(s) away from the center of the spool until they click.



MCS Magnetic Control System

MAGNETIC CONTROL SYSTEM (MCS)

Externally adjustable, full-release magnetic braking system for complete free spool casting. As the spool accelerates it experiences magnetic resistance, which can be controlled with a dial on the palming sideplate. Full-release magnetic brake.



SmartPlus 6-PIN CBS Centrifugal Brake System

SMARTPLUS™ CENTRIFUGAL BRAKE SYSTEM / 6-PIN

This brake system is unmatched for casting distance and backlash control. This system features four spring loaded SmartPlus pins (white) and two Speed pins (blue), each capable of being turned "on" (out position) or "off" (in position). The SmartPlus pins automatically back off the applied brake resistance as the cast slows, offering superior control in a variety of fishing conditions. For more braking power such as when casting into the wind, the Speed pins can be engaged throughout the entire cast. The Speed pins can be accessed by removing the palming sideplate. To engage, simply push the Speed pins away from the center of the spool until they click, to disengage push them towards the center of the spool until they click.



SpeedCast 4-PIN Adjustable Centrifugal Brake

SPEEDCAST® ADJUSTABLE CENTRIFUGAL BRAKE / 4-PIN

Delivers an extreme range of braking power from free spool to maximum by simply clicking its external dial to choose among 27 variable settings. The ACB system puts you in control of your casts, perfectly aligning brake power to conditions. With this system you will have more casting control over light lures, while maximizing casting distance with all lures.



QuietCast 6-PIN Adjustable Centrifugal Brake

QUIETCAST® ADJUSTABLE CENTRIFUGAL BRAKE / 6-PIN

Delivers an extreme range of braking power from free spool to maximum by simply clicking its external dial to choose among 27 variable settings. The ACB system puts you in control of your casts, perfectly aligning brake power to conditions. With this system you will have quiet and smooth casting control, while maximizing casting distance.



SUPERIOR
EQUIPMENT
SINCE
1949

THE BB1 PRO

THE LEGACY THAT LASTS

The original BB-1 developed by Lew Childre in 1973 introduced anglers to several baitcast reel firsts, including the low-profile design, narrow spool, fully disengaging levelwind, and no-knob side cover. It became famous for its rugged durability, casting distance and comfort. The ingenuity and craftsmanship of the Lew's BB1 reels developed a loyal following of anglers that still carries on to this day.

BB1 PRO CASTING

NEW



BB1 Pro Speed Spool® Series

- NEW Ergonomically shaped aluminum frame with graphite sideplates
- NEW Lew's exclusive double taper paddle knobs
- P2 Super Pinion® bearing supported pinion gear provides precise alignment and solid stability, resulting in for a smoother operation and extended gear life
- Braid ready, machine forged black titanium anodized aluminum U-shape high capacity 35mm spool
- Premium 10-bearing system with double-shielded ball bearings and Zero Reverse® anti-reverse
- Hard anodized aluminum alloy Speed Gears®, cut on precision Hamai CNC hobbing machines
- Externally adjustable 6-pin 27 position QuietCast® Adjustable Centrifugal Braking system (ACB)
- Double anodized aluminum spool tension knob with patented Speed Dial® line indicator
- Carbon fiber drag with Drag Out Alarm produces 20 lbs. of max drag
- Audible click aluminum star drag control
- Bowed 95mm anodized skeletal aluminum reel handle with Lew's® custom paddle grips
- Dual stage titanium-coated Zirconia line guide positioned farther away from the spool to minimize line friction and maximize casting performance
- External lube port
- Exclusive patented Speed Keeper® hook keeper



MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
PROIH	9+1	6.2:1	25"	160/12	160/50	6.7	20 lbs.	Right
PROIHL	9+1	6.2:1	25"	160/12	160/50	6.7	20 lbs.	Left
PROISH	9+1	7.5:1	31"	160/12	160/50	6.7	20 lbs.	Right
PROISHL	9+1	7.5:1	31"	160/12	160/50	6.7	20 lbs.	Left
PROIXH	9+1	8.3:1	35"	160/12	160/50	6.7	20 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

SUPER LOW PROFILE

LEW'S SLP BAITCAST REELS

At Lew's, we know you depend on your gear to hold up in any condition. We build for that, we test for that, in fact, we pride ourselves in that.

-Team Lew's

Team Lew's® Pro-Ti SLP Series



- 11 bearing system with stainless steel double-shielded ball bearings, includes 2 Japanese high speed-spool bearings
- Aircraft-grade Duralumin double anodized drilled and chamfered U-Shape 32mm spool
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame
- Aluminum sideplates with titanium deposition finish
- 6-pin QuietCast® externally Adjustable Centrifugal Brake (ACB) system
- External lube port
- Patented Speed Dial® line indicator allows for easy identification of line type and pound test
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Titanium-coated Zirconia line guide
- Carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines
- 95mm bowed carbon fiber handle with Winn® Dri-Tac knobs

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TLPT1SH	10+1	7.5:1	30"	110/12	110/50	6.3	20 lbs.	Right
TLPT1SHL	10+1	7.5:1	30"	110/12	110/50	6.3	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Team Lew's HyperMag SLP Series



- 11 bearing system with stainless steel double shielded ball bearings
- Aircraft-grade Duralumin double anodized drilled and chamfered U-Shape 32mm spool
- Zero Reverse® one-way clutch bearing
- One-piece magnesium frame
- C45 carbon sideplates
- 4-pin SpeedCast® externally Adjustable Centrifugal Brake (ACB) system
- External lube port
- Patented Speed Dial® line indicator allows for easy identification of line type and pound test
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Titanium-coated Zirconia line guide
- Carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines
- 95mm bowed carbon fiber handle with Winn® Dri-Tac knobs

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TLH1SH	10+1	7.5:1	30"	110/12	110/50	5.4	20 lbs.	Right
TLH1SHL	10+1	7.5:1	30"	110/12	110/50	5.4	20 lbs.	Left
TLH1XH	10+1	8.3:1	33"	110/12	110/50	5.4	20 lbs.	Right
TLH1XHL	10+1	8.3:1	33"	110/12	110/50	5.4	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand
Magnesium frame not suitable for use in saltwater.



LOW PROFILE DESIGN WAS BORN HERE

Lew's introduced the first low profile reel design in 1973, and would forever change the way we look at a fishing reel.

NEW



Team Lew's® Custom Pro SLP Series

- **NEW** One-piece aluminum Super Low Profile frame with strong, lightweight C45 carbon sideplates
- Aircraft-grade double anodized Duralumin drilled U-shape 32mm spool
- Hard aluminum alloy Speed Gears®, cut on Hamai CNC gear hobbing machine
- P2 Super Pinion® bearing supported pinion gear provides precise alignment and solid stability, resulting in for a smoother operation and extended gear life
- Premium 11 bearing system with double-shielded stainless steel ball bearings and Zero Reverse one-way clutch bearing
- Externally adjustable 6-pin 27 position QuietCast® Adjustable Centrifugal Braking system (ACB)
- Double anodized aluminum spool tension adjustment with audible click
- Rugged carbon fiber drag system provides up to 20 lbs. of drag power
- Bowed lightweight 95mm carbon fiber handle with EVA Pro knobs
- Double anodized bowed aluminum drag star with audible click adjustment
- Titanium-coated Zirconia line guide
- Patented Speed Dial® line indicator and patented Speed Keeper® hook keeper
- External lube port

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CPB1H	10+1	6.8:1	27"	110/12	110/50	5.6	20 lbs.	Right
CPB1SH	10+1	7.5:1	30"	110/12	110/50	5.6	20 lbs.	Right
CPB1SHL	10+1	7.5:1	30"	110/12	110/50	5.6	20 lbs.	Left
CPB1XH	10+1	8.3:1	33"	110/12	110/50	5.6	20 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Custom Lite SLP Series

- 11 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece proprietary Tanso Tech™ frame with drain ports
- C45 carbon sideplates
- 6-pin QuietCast® externally Adjustable Centrifugal Brake (ACB) system
- External lube port
- Patented Speed Dial® line indicator allows for easy identification of line type and pound test
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Titanium-coated Zirconia line guide
- Carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed carbon fiber handle with EVA paddle knobs
- Titanium anodized aircraft-grade Duralumin 30mm U-style spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CL1SH	10+1	7.5:1	28"	90/12	90/50	4.9	20 lbs.	Right
CL1SHL	10+1	7.5:1	28"	90/12	90/50	4.9	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

NEW



Custom SLP Series

- **NEW** One-piece aluminum Super Low Profile frame with strong, lightweight graphite sideplates
- Drilled and forged, anodized aluminum U style 32mm spool
- Hard anodized aluminum alloy Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- P2 Super Pinion® bearing supported pinion gear provides precise alignment and solid stability, resulting in for a smoother operation and extended gear life
- Multi-Setting Brake (MSB) dual cast control system utilizing both an external click-dial for setting the magnetic brake, plus 4 individually disengaging, disk-mounted internal brake shoes that operate on centrifugal force
- Premium 10 bearing system with double-shielded stainless steel ball bearings and Zero Reverse® one-way clutch bearing
- Double anodized aluminum spool tension adjustment with audible click
- Rugged carbon fiber drag system provides up to 20 lbs. of drag power.
- Bowed lightweight aluminum reel handle with EVA Pro knobs
- Anodized bowed aluminum drag star with audible click adjustment
- Zirconia line guide
- Patented Speed Dial® line indicator and Speed Keeper® hook keeper
- External lube port

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CU1SH	9+1	7.5:1	30"	110/12	110/50	6.4	20 lbs.	Right
CU1SHL	9+1	7.5:1	30"	110/12	110/50	6.4	20 lbs.	Left
CU1XH	9+1	8.3:1	33"	110/12	110/50	6.4	20 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



LESS LINE. LESS PRACTICE. MORE FISH.

PRO SP - BUILT FOR SKIPPING & PITCHING



Team Lew's® Pro SP SLP Series

- 9 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame
- Graphite sideplates
- 6-pin QuietCast® externally Adjustable Centrifugal Brake (ACB) system with Skipping Zone
- External lube port
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- 20 lb. carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines
- 95mm bowed aluminum handle with EVA Pro knobs
- Anodized aluminum 32mm shallow spool with Knot Slot for smooth line lay

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
PSP1XH	8+1	8.3:1	33"	40/20	40/50	6.0	20 lbs.	Right
PSP1XHL	8+1	8.3:1	33"	40/20	40/50	6.0	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



SKIPPING ZONE FOR EASY SETUP



Laser® MG SLP Series

- 8 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame and sideplates
- High strength solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- Externally adjustable Magnetic Control System (MCS)
- Durable Rulon drag system, provides up to 15 lbs. of drag power
- High strength solid brass main gear and crank shaft
- Zirconia line guide
- 95mm bowed anodized aluminum handle with Lew's custom paddle knobs
- Anodized aluminum 32mm spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
LSG1HAMG	7+1	6.8:1	27"	110/12	110/50	7.1	15 lbs.	Right
LSG1SHAMG OR C	7+1	7.5:1	30"	110/12	110/50	7.1	15 lbs.	Right
LSG1SHLAMG	7+1	7.5:1	30"	110/12	110/50	7.1	15 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam Pack



LIGHTER FASTER STRONGER

LEW'S LFS BAITCAST REELS

As the inventors of the low profile reel, leading the way with product innovation is in our blood.

- Team Lew's

NEW

Tournament Lite LFS Series

- One-piece aluminum frame with strong, lightweight C45 carbon sideplates
- Aircraft-grade double anodized Duralumin drilled U-shape 34mm spool
- Hard aluminum alloy Speed Gear®, cut on Hamai CNC gear hobbing machines
- P2 Super Pinion® bearing supported pinion gear provides precise alignment and solid stability, resulting in for a smoother operation and extended gear life
- Premium 11 bearing system with double-shielded stainless-steel ball bearings and Zero Reverse® one-way clutch bearing
- Externally adjustable 6-pin 27 position QuietCast® Adjustable Centrifugal Braking system (ACB)
- Double anodized aluminum spool tension adjustment with audible click
- Rugged carbon fiber drag system provides up to 20 lbs. of drag power
- Bowed lightweight 95mm carbon fiber handle with EVA Pro knobs
- Double anodized bowed aluminum drag star with audible click adjustment
- Combat Grip® thumb bar
- Titanium-coated Zirconia line guide
- Patented Speed Dial® indicator and Speed Keeper® hook keeper
- External lube port

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TLTISH	10+1	7.5:1	31"	120/12	120/50	5.3	20 lbs.	Right
TLTISHL	10+1	7.5:1	31"	120/12	120/50	5.3	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Tournament Pro Speed Spool® LFS Series

- 11 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame
- C45 carbon sideplates
- 6-pin QuietCast® externally Adjustable Centrifugal Brake (ACB) system
- External lube port
- Patented Speed Dial® line indicator allows for easy identification of line type and pound test
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Combat Grip® thumb bar
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- Carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed carbon fiber handle with Combat Grip® knobs
- Double anodized forged aluminum 34mm spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TP1HA	10+1	6.8:1	28"	120/12	120/50	6.4	20 lbs.	Right
TP1HLA	10+1	6.8:1	28"	120/12	120/50	6.4	20 lbs.	Left
TP1SHA	10+1	7.5:1	31"	120/12	120/50	6.4	20 lbs.	Right
TP1SHLA	10+1	7.5:1	31"	120/12	120/50	6.4	20 lbs.	Left
TP1XHA	10+1	8.3:1	35"	120/12	120/50	6.4	20 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Tournament MP Speed Spool® LFS Series

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with graphite sideplates
- Multi-Setting Brake (MSB) system utilizes externally adjustable magnetic and internally adjustable 4-pin centrifugal braking
- External lube port
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Combat Grip® thumb bar
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- 20 lb. max carbon fiber drag system
- Hard anodized aluminum alloy Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed anodized aluminum handle with Combat Grip® knobs
- Double anodized aluminum 34mm U-style spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TS1SMP	9+1	5.6:1	23"	140/12	140/50	7.0	20 lbs.	Right
TS1HMP	9+1	6.8:1	28"	120/12	120/50	6.9	20 lbs.	Right
TS1HMPL	9+1	6.8:1	28"	120/12	120/50	6.9	20 lbs.	Left
TS1SHMP	9+1	7.5:1	31"	120/12	120/50	6.9	20 lbs.	Right
TS1SHMPL	9+1	7.5:1	31"	120/12	120/50	6.9	20 lbs.	Left
TS1XHMP	9+1	8.3:1	35"	120/12	120/50	6.9	20 lbs.	Right
TS1XHMPL	9+1	8.3:1	35"	120/12	120/50	6.9	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Speed Spool LFS Series

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with graphite sideplates
- Externally adjustable Magnetic Control System (MCS)
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- Durable Rulon 15 lb. max drag system
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed anodized aluminum handle with SoftTouch paddle knobs
- Anodized aluminum 34mm spool. SSISA features high capacity spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SSISA	9+1	5.6:1	23"	140/12	140/50	7.2	15 lbs.	Right
SSIHA	9+1	6.8:1	28"	120/12	120/50	7.1	15 lbs.	Right
SSIHLA	9+1	6.8:1	28"	120/12	120/50	7.1	15 lbs.	Left
SSISHA	9+1	7.5:1	31"	120/12	120/50	7.1	15 lbs.	Right
SSISHLA	9+1	7.5:1	31"	120/12	120/50	7.1	15 lbs.	Left
SSIXHA	9+1	8.3:1	35"	120/12	120/50	7.1	15 lbs.	Right
SSIXHLA	9+1	8.3:1	35"	120/12	120/50	7.1	15 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

AF

COMBAT GRIP

SPEED KEEPER

SPEED GEARS

MSB Multi-Setting Brake

10 Bearing System

P2 SUPER PINION

MODEL TS1SMP
FEATURES A
DEEPER SPOOL



AF

SPEED GEARS

MCS Magnetic Control System

10 Bearing System

P2 SUPER PINION

COMBINING SPEED WITH POWER

“I've been so impressed with the quality of components Lew's uses in their reels, and at a very affordable price.”

Kei Valda
MLF PRO ANGLER



KVD LFS Series

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with graphite sideplates
- Multi-Setting Brake (MSB) system utilizes externally adjustable magnetic and internally adjustable 4-pin adjustable centrifugal braking
- External lube port
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- 20 lb. max carbon fiber drag system
- Hard anodized brass Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed anodized aluminum handle with EVA knobs
- Anodized aluminum 34mm U-style spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
KVDIH	9+1	6.2:1	25"	120/12	120/50	7.2	20 lbs.	Right
KVDIHL	9+1	6.2:1	25"	120/12	120/50	7.2	20 lbs.	Left
KVDISH	9+1	7.5:1	31"	120/12	120/50	7.2	20 lbs.	Right
KVDISHL	9+1	7.5:1	31"	120/12	120/50	7.2	20 lbs.	Left
KVDIXH	9+1	8.3:1	35"	120/12	120/50	7.2	20 lbs.	Right
KVDIXHL	9+1	8.3:1	35"	120/12	120/50	7.2	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

AF

SPEED KEEPER

SPEED GEARS

MSB Multi-Setting Brake

10 Bearing System

P2 SUPER PINION

POWER & GRIT

THE SUPER DUTY SERIES



NEW



Super Duty® LFS Series

- One-piece aluminum frame and handle sideplate
- Premium 11 bearing system with stainless steel double shielded bearings and Zero Reverse® one-way clutch
- Braid-ready, machined, double anodized, 34mm deep capacity spool
- P2 Super Pinion® bearing supported pinion gear provides precise alignment and solid stability, resulting in for a smoother operation and extended gear life
- Externally adjustable Magnetic Control System (MCS)
- Easily removable palming graphite sideplate with SoftTouch armor finish
- Double anodized aluminum spool tension adjustment with audible click
- Rugged carbon fiber drag system provides up to 20 lbs. of drag power
- Audible click, bowed, double anodized aluminum star drag
- Bowed, anodized aluminum "power crank" 95mm reel handle
- Lew's® Combat Grip® paddle knobs
- Lew's® Combat Grip® thumb bar
- Titanium-coated Zirconia line guide
- All models now have a flipping switch

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SD1HF*	10+1	6.8:1	28"	150/12	150/50	8.0	20 lbs.	Right
SD1SHF*	10+1	7.5:1	31"	150/12	150/50	8.0	20 lbs.	Right
SD1XHF*	10+1	8.3:1	35"	150/12	150/50	8.0	20 lbs.	Right
SD1XHLF*	10+1	8.3:1	35"	150/12	150/50	8.0	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | * Flipping Switch



Super Duty GX3 Series

- 5 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one way clutch and ZRXtra system multi-stop back up
- One-piece graphite frame with drain ports and graphite sideplates
- SmartPlus™ 6-pin Centrifugal Brake System (CBS)
- External lube port
- Combat Grip® thumb bar
- On/Off bait clicker switch
- Drag out alarm
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- Carbon fiber drag system
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- 100mm bowed anodized aluminum handle with Combat Grip® paddle knobs
- Braid ready, double anodized deep capacity spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SDGX3H	4+1	6.5:1	31"	190/14	150/65	8.8	20 lbs.	Right
SDGX3HL	4+1	6.5:1	31"	190/14	150/65	8.8	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Super Duty 300 Series

- 7 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one way clutch and ZRXtra system multi-stop back up
- One-piece aluminum frame with drain ports
- Aluminum handle sideplate and graphite palm sideplate
- Multi-Setting Brake (MSB) system utilizes externally adjustable magnetic and internally adjustable 4-pin centrifugal braking
- External lube port
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Combat Grip® thumb bar
- Drag out alarm
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Titanium-coated Zirconia line guide
- 20 lb. Carbon fiber drag system
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- 100mm bowed anodized aluminum handle with Winn® Dri-Tac knobs
- Braid ready, double anodized deep capacity spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SD3H	6+1	6.5:1	31"	190/14	150/65	9.2	24 lbs.	Right
SD3HL	6+1	6.5:1	31"	190/14	150/65	9.2	24 lbs.	Left
SD3SH	6+1	7.2:1	35"	190/14	150/65	9.2	24 lbs.	Right
SD3SHL	6+1	7.2:1	35"	190/14	150/65	9.2	24 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Speed Cast®

- 5 bearing system
- Zero Reverse® one-way clutch bearing
- Aluminum frame and sideplates
- Centrifugal braking system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Carbon fiber drag system
- Brass main gear and crankshaft
- 100mm anodized power handle with round EVA knobs
- Audible bait clicker
- Anodized aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SC600	4+1	5.3:1	23"	300/15	200/65	11.8	15 lbs.	Right
SC600L	4+1	5.3:1	23"	300/15	200/65	11.8	15 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

5 Bearing System
ZERO REVERSE®



Laser XL®

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Stick frame construction with aluminum sideplates
- Centrifugal braking system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Carbon fiber drag system
- Brass main gear and crankshaft
- 100mm anodized power handle with round EVA knobs
- Audible bait clicker
- Anodized aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
LXLC60	3+1	4.2:1	18"	330/20	330/80	11.9	15 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

ZERO REVERSE®
4 Bearing System



Wally Marshall™ Signature Series Jig/Troll Crappie Reel

- 2 bearing system
- Multi-stop anti-reverse
- Graphite frame and sideplates
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Smooth drag system
- Precision machined brass gearing
- Dual grip handle
- Selective on/off bait clicker
- Graphite spool
- Pre-spooled with premium 6 lb. Mr. Crappie® Monofilament

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
WMR5	2	6.1:1	19"	100/10	5.6	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

2 Bearing System

SPEED CAST SERIES

**GREAT VALUE.
GREAT LOOKING.
SPEED INCLUDED.**



Speed Cast and Speed Cast Mini Spincast Reels

- 2 Bearing system
- Multi-stop anti-reverse
- Stainless steel cone
- Dual pick-up pins
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Combat Grip® thumb button
- Graphite handle with Combat Grip® paddle knob
- Adjustable for right or left hand retrieve
- Pre-spooled with premium monofilament

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
SSC1C	2	4.4:1	18"	125/4	5.6	R/L
SSC2C	2	4.4:1	24"	100/6	6.4	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam pack

2 Bearing System
COMBAT GRIP



Speed Cast Underspin Spincast Reel

- 2 Bearing system
- Multi-stop anti-reverse
- Stainless Steel cone
- Dual pick-up pins
- Ergonomically designed trigger
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Graphite handle with Combat Grip® paddle knob
- Adjustable for right or left hand retrieve
- Pre-spooled with premium monofilament

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
SUS1C	2	4.4:1	16"	125/4	6.0	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam pack

2 Bearing System
COMBAT GRIP

RAISING THE BAR

LEW'S SPINNING REELS

The new standard for spinning excellence is here. A perfect combination of speed, power, and balance.

- Team Lew's

NEW



HyperMag Magnesium

- Premium 11 stainless steel bearing system
- Zero Reverse® sealed one-way clutch bearing
- Magnesium body and sideplate
- Lightweight high strength magnesium skeletal rotor with aluminum bail wire
- Lightweight double anodized knurled aluminum spool
- Proprietary forged main gear
- External stainless steel screws
- Smooth sealed multi-disc carbon drag system
- Machined aluminum handle with Winn® Dri-Tac knob
- Speed Lube® for exceptional smoothness and uninterrupted performance in all weather conditions from extreme heat to freezing cold

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
HMS200	10+1	6.2:1	32"	160/8	200/15	7.3	20 lbs.	R/L
HMS300	10+1	6.2:1	34"	160/10	180/20	7.6	22 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left
Magnesium frame not suitable for use in saltwater.



Team Lew's® Custom Pro Series

- 12 bearing system
- Zero Reverse® one-way clutch bearing
- Aluminum frame and sideplate
- Flush and drain port that allows you to flush out your reel with a water dispersing spray if accidentally submerged (2000, 3000, 4000 models only)
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- C60 carbon skeletal rotor
- Carbon fiber drag system
- High strength Speed Gears® with a strong, lightweight aluminum pinion gear cut on Hamai CNC machines
- Screw in aluminum handle with Winn® Dri-Tac knob
- Double anodized braid ready aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
TLC1000	11+1	5.2:1	25"	90/6	100/8	7.2	8 lbs.	R/L
TLC2000	11+1	6.2:1	32"	160/8	2000/15	8.8	20 lbs.	R/L
TLC3000	11+1	6.2:1	34"	160/10	180/20	9.0	22 lbs.	R/L
TLC4000	11+1	6.2:1	37"	190/12	200/30	10.1	24 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



Custom Series

- 10 bearing system
- Zero Reverse® one-way clutch bearing
- Aluminum frame and sideplate
- Flush and drain port that allows you to flush out your reel with a water dispersing spray if accidentally submerged (200 and 300 models only)
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- C60 carbon skeletal rotor
- Carbon fiber drag system
- High strength Speed Gears® with a strong, lightweight aluminum pinion gear cut on Hamai CNC machines
- Screw in aluminum handle with Winn® Dri-Tac knob
- Double anodized braid ready aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CS100	9+1	5.2:1	25"	90/6	100/10	7.5	8 lbs.	R/L
CS200	9+1	6.2:1	32"	160/8	200/15	9.0	20 lbs.	R/L
CS300	9+1	6.2:1	34"	160/10	180/30	9.2	22 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



WE'VE PUT A NEW SPIN ON THINGS



KVD Series

- 10 bearing system
- Zero Reverse® one-way clutch bearing
- Aluminum frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- C40 carbon skeletal rotor
- DuraMax™ drag system
- Solid brass pinion gear and stainless steel main shaft
- Screw in aluminum handle with EVA Pro handle knob
- Double anodized braid ready knurled aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
KVD200	9+1	6.2:1	31"	120/8	180/10	8.6	14 lbs.	R/L
KVD300	9+1	6.2:1	32"	180/10	250/15	8.8	14 lbs.	R/L
KVD400	9+1	6.2:1	35"	190/12	300/20	9.8	18 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



THE CLASSICS NEVER GO OUT OF STYLE



Speed Spin® Series

- 10 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- High strength Speed Gears® cut on Hamai CNC machines
- Solid brass pinion gear and stainless steel main shaft
- Screw in aluminum handle with Combat Grip® paddle knob
- Double anodized braid ready knurled aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SS10HS OR C	9+1	5.2:1	23"	90/6	115/8	7.4	7 lbs.	R/L
SS20HS OR C	9+1	6.2:1	32"	145/8	220/10	9.1	9 lbs.	R/L
SS30HS OR C	9+1	6.2:1	35"	145/10	200/15	9.4	13 lbs.	R/L
SS40HS OR C	9+1	6.2:1	38"	185/12	290/20	10.3	15 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Wally Marshall
PRO CRAPPIE ANGLER

CALL THEM
WHAT YOU WANT
WE HAVE THE
REEL FOR IT

WALLY MARSHALL CRAPPIE REELS



Wally Marshall™ Speed Shooter Series

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Folding handle with SoftTouch knob
- Double anodized aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
WMSS75 OR C	3+1	5.0:1	22"	160/4	5.1	R/L
WMSS100 OR C	3+1	5.1:1	23.5"	160/6	7.4	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Wally Marshall™ Signature Series

- 6 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Folding handle with SoftTouch knob
- Double anodized aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
WSP50 OR C	5+1	5.0:1	21"	120/4	4.9	R/L
WSP75 OR C	5+1	5.0:1	22"	120/6	5.0	R/L
WSP100	5+1	5.1:1	23.5"	160/6	7.3	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Laser® SG Series

- 8 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Oiled felt multi-disc drag system
- Skeletal graphite rotor
- Folding handle with Lew's performance paddle knob
- Double anodized braid ready knurled aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
LSG100A OR C	7+1	5.2:1	23"	120/6	150/8	8.1	7 lbs.	R/L
LSG200A OR C	7+1	5.2:1	25"	120/8	180/10	8.3	14 lbs.	R/L
LSG300A OR C	7+1	5.2:1	27"	180/10	150/15	9.3	14 lbs.	R/L
LSG400A OR C	7+1	5.2:1	30"	190/12	300/20	9.8	18 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Laser Lite Series

- 7 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Folding handle with SoftTouch knob
- Double anodized aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
LLS50 OR C	6+1	5.0:1	21"	120/4	4.9	R/L
LLS75 OR C	6+1	5.0:1	22"	120/6	5.0	R/L
LLS100 OR C	6+1	5.1:1	23.5"	160/6	7.3	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



DRIVEN BY INNOVATION

FUELED BY PASSION

LEW'S RODS

Our team is constantly pushing the limits with our rod testing and design. We believe we have some of the best rods on the market today and we're not slowing down.

- Team Lew's

TEAM LEW'S SIGNATURE SERIES

XD CRANKING SERIES

WALLY MARSHALL CLASSIC SERIES

RODS

NEW FOR 2022



Mark Rose

MARK ROSE - CAROLINA RIG - CASTING

Mark Zona

MARK ZONA - POWER FINESSE - SPINNING

PRO DESIGNED.
PRO TESTED.
PRO PROVEN

Kevin Van Dam

KEVIN VAN DAM - TOPWATER - CASTING

Andy Montgomery

ANDY MONTGOMERY - THUNDER CRICKET - CASTING

Greg Hackney

GREG HACKNEY - PITCHING - HEAVY COVER CASTING

"This is personal to me. Before my signature is stamped on a rod, you can be sure that I have the confidence it will meet the demands of the anglers who will be buying them."

MARK ROSE

"With my style of spinning, sensitivity is key. I have no patience for missing even the slightest strike. This was my most critical request for my friends at Lew's - build a rod with exceptional sensitivity. And Team Lew's delivered."

MARK ZONA

"At this point in my career, I only use the best. I fish hard, and I am demanding on my gear. I designed the KVD Signature Series rods to meet the rigors of my style of angling."

KEVIN VANDAM

"This rod is built by folks I trust. By people who understand serious angling. It is built to deliver results. It is built with integrity."

ANDY MONTGOMERY

"Power and speed are so important to my style of pitching a jig and throwing a frog. I need a rod that is strong enough to pull a fish out of heaviest of cover. A lesser rod just won't cut it. Our team at Lew's has built a rod that will do the job."

GREG HACKNEY

NEW

Team Lew's® Signature Series

- Lew's proprietary multilayered graphite blank with FOCAS® Blank Technology
- NEW Winn® Dri-Tac Ultra split grips
- SeaGuide® RA seaguides with premium aluminum oxide inserts
- Full contact reel seat for increased blank contact on casting models
- Lew's exclusive BARE reel seat utilizing G Clutch® Handle System for spinning models
- Patented "No Foul" hook keeper

FOCAS® BLANK TECHNOLOGY

- 75% greater tip strength than traditional blanks
- Increased hook up strength
- Increased overall strength with blank protection, while still maintaining a lightweight blank



MODEL	TECHNIQUE	PRO	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods											
TLS610MH	Jerkbait	KVD	6'10"-1	MH	F	12-25	3/8-3/4	FOCAS	Split	Winn®	8+Tip
TLS70M	Topwater	KVD	7'0"-1	M	F	10-20	3/16-1/2	FOCAS	Split	Winn®	8+Tip
TLS70MH	Spinnerbait/ Target Rod	KVD	7'0"-1	MH	F	10-30	1/4-2	FOCAS	Split	Winn®	8+Tip
TLS70M-CB	Squarebill/ Red Eyed Shads	KVD	7'0"-1	M	F	10-17	1/4-3/8	FOCAS	Split	Winn®	8+Tip
TLS69H	Skipping	Andy Montgomery	6'9"-1	H	M	16-30	1/4-1 1/2	FOCAS	Split	Winn®	8+Tip
TLS71H	Skipping	Andy Montgomery	7'1"-1	H	F	16-30	1/4-1 1/2	FOCAS	Split	Winn®	8+Tip
TLS73MH	Thunder Cricket	Andy Montgomery	7'3"-1	MH	F	10-20	1/4-3/4	FOCAS	Split	Winn®	9+Tip
TLS72H	Jig/Worm	Mark Rose	7'2"-1	H	MF	14-25	3/8-1 1/2	FOCAS	Split	Winn®	9+Tip
TLS75MH	Carolina Rig	Mark Rose	7'5"-1	MH	F	12-25	1/4-1 1/2	FOCAS	Split	Winn®	9+Tip
TLS76MH	Swimbait	Mark Rose	7'6"-1	MH	F	14-25	1/4 1 1/2	FOCAS	Split	Winn®	9+Tip
TLS711MH-CB	Deep Crankbaits	Mark Rose	7'11"-1	MH	F	10-14	1/8- 3/4	FOCAS	Split	Winn®	10+Tip
Heavy Cover Casting											
TLS73H	Frog	Greg Hackney	7'3"-1	H	F	14-65	3/8-1 1/2	FOCAS	Split	Winn®	10+Tip
TLS76H	Pitching	Greg Hackney	7'6"-1	H	F	14-65	1/4-2	FOCAS	Split	Winn®	10+Tip
TLS711H	Flipping	Greg Hackney	7'11"-1	H	F	17-65	1/4-2	FOCAS	Split	Winn®	10+Tip
Spinning											
TLS610MXFS	Shakey Head	Mark Zona	6'10"-1	M	XF	6-12	1/8-3/8	FOCAS	G-Clutch	Winn®	8+Tip
TLS70MXFS	All-Purpose	Mark Zona	7'0"-1	M	XF	6-12	1/8-3/8	FOCAS	G-Clutch	Winn®	8+Tip
TLS72MXFS	Tube Crackin' Special	Mark Zona	7'2"-1	M	XF	6-12	1/8-3/8	FOCAS	G-Clutch	Winn®	8+Tip
TLS74MXFS	Power Finesse	Mark Zona	7'4"-1	M	XF	6-12	1/8-3/8	FOCAS	G-Clutch	Winn®	8+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material

GO DEEP

OR GO HOME

NEW



XTRA DEEP

XD Cranking Series

- Premium HM50 Tour Grade high modulus graphite blank with Carbon Nano Tube construction
- SeaGuide® X-Frame guides
- Lew's® exclusive SoftTouch graphite skeletal reel seat
- **NEW** Lew's exclusive Winn® full length Dry-Tac grips
- Solid stainless steel hook keepers

MODEL	TECHNIQUE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
LPM3XD	3XD Crankbait	7'4"-1	M	MF	8-14	1/4-3/4	HM50	Full	Winn®	10+Tip
LPM5XD	5XD Crankbait	7'6"-1	M	MF	8-14	1/4-3/4	HM50	Full	Winn®	10+Tip
LPM6XD	6XD Crankbait	7'6"-1	MH	XF	8-17	1/4-1 1/2	HM50	Full	Winn®	12+Tip
LPM8XD	8XD Crankbait	7'8"-1	MH	XF	8-17	1/4-1 1/2	HM50	Full	Winn®	12+Tip
LPM10XD	10XD Crankbait	7'10"-1	MH	XF	8-17	1/4-2	HM50	Full	Winn®	12+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material



LEW'S EXCLUSIVE VTR SYSTEM

Vibration Transfer Ring (VTR) provides direct contact with the blank, transferring vibration directly to your hands.

CT-1™ COMFORTOUCH GRIPS

The grip fully encompasses the entire reel foot, providing the most comfortable grip ever produced on a spinning rod.

Team Lew's® Pro-Ti Series

- Lew's® exclusive multilayered proprietary LFS-X5 graphite blank with Titanium Nano Technology
- Premium tangle free titanium guide frames with Zirconia inserts
- VTR System (Vibration Transfer Ring) allows direct contact with the blank
- CT-1™ Comfortouch Winn® Dri-Tac handle on spinning models
- Winn® Dri-Tac split grip handle
- Lew's exclusive SoftTouch graphite skeletal reel seat on casting models
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
TLPTI68M	Casting	6'8"-1	M	F	6-12	1/8-1/2	LFS-X5	Split	Winn®	9+Tip
TLPTI610MH	Casting	6'10"-1	MH	F	10-20	3/16-5/8	LFS-X5	Split	Winn®	9+Tip
TLPTI70M	Casting	7'0"-1	M	MF	10-20	1/8-1/2	LFS-X5	Split	Winn®	9+Tip
TLPTI70MH	Casting	7'0"-1	MH	F	12-25	1/4-7/8	LFS-X5	Split	Winn®	9+Tip
TLPTI72M	Casting	7'2"-1	M	F	10-20	3/16-5/8	LFS-X5	Split	Winn®	9+Tip
TLPTI73MH	Casting	7'3"-1	MH	F	12-20	3/16-1	LFS-X5	Split	Winn®	10+Tip
TLPTI74H	Casting	7'4"-1	H	F	15-65	3/16-1 1/2	LFS-X5	Split	Winn®	10+Tip
Spinning Rods										
TLPTI66MLFS	Spinning	6'6"-1	ML	F	4-10	1/16-1/4	LFS-X5	CT-1®	Winn®	7+Tip
TLPTI68MXFS	Spinning	6'8"-1	M	XF	6-12	1/16-1/4	LFS-X5	CT-1®	Winn®	8+Tip
TLPTI69MLFS	Spinning	6'9"-1	ML	F	6-10	1/8-3/8	LFS-X5	CT-1®	Winn®	8+Tip
TLPTI610MXFS	Spinning	6'10"-1	M	XF	6-12	1/4-5/8	LFS-X5	CT-1®	Winn®	8+Tip
TLPTI70MFS	Spinning	7'0"-1	M	F	6-14	3/16-5/8	LFS-X5	CT-1®	Winn®	8+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material

RODS

XD & PRO-TI






Team Lew's® Custom Pro Series

- Lew's® exclusive multilayered proprietary LFS-X5 graphite blank
- Tangle free stainless steel guide frames with zirconium inserts
- A-Grade cork with palm swell handles with EVA and Duracork inlay
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Patented "No Foul" hook keeper

LFS-X5 NANO TECHNOLOGY

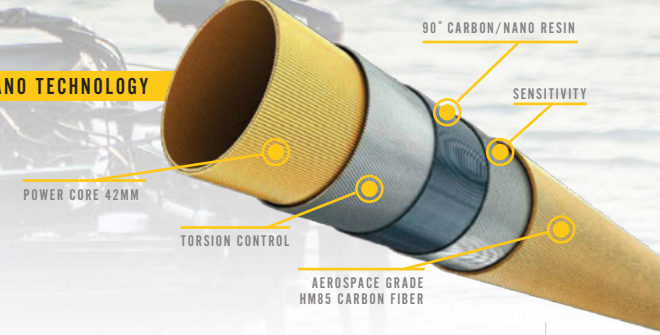

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
TLCPTWS	Topwater Special	6'8"-1	M	F	6-12	1/8-1/2	LFS-X5	Full-Length	Cork/EVA	9+Tip
TLCPSBR	Spinnerbait	6'10"-1	MH	F	10-20	3/16-5/8	LFS-X5	Full-Length	Cork/EVA	9+Tip
TLCAPAC	All Purpose	7'0"-1	M	MF	10-20	1/8-1/2	LFS-X5	Full-Length	Cork/EVA	9+Tip
TLCPMBRI	Magnum Bass 1	7'0"-1	MH	F	12-25	1/4-7/8	LFS-X5	Full-Length	Cork/EVA	9+Tip
TLCPMH	Magnum Hammer	7'3"-1	MH	F	10-25	1/4-5/8	LFS-X5	Full-Length	Cork/EVA	10+Tip
TLCPMPS	Magnum Pitching	7'4"-1	H	F	15-65	1/2-2	LFS-X5	Full-Length	Cork/EVA	10+Tip
TLCPMHC	Magnum Heavy Cover	7'6"-1	H	F	15-65	3/16-1	LFS-X5	Full-Length	Cork/EVA	10+Tip
TLCPMFR*	Monster Flipping	9'0"-Tel	H	F	17-65	1/2-2	LFS-X5	Full-Length	Cork/EVA	12+Tip
Spinning Rods										
TLCPDS	Dock Sniper	6'11"-1	M	XF	6-10	1/8-3/8	LFS-X5	Split grip	Cork/EVA	8+Tip
TLCPAPS1	All Purpose	7'0"-1	M	F	6-12	3/16-5/8	LFS-X5	Split grip	Cork/EVA	9+Tip
TLCPMSR2	Magnum 2	7'0"-1	MH	F	8-14	3/8-3/4	LFS-X5	Split grip	Cork/EVA	9+Tip
TLCPTS	Tube Special	7'2"-1	MH	MF	8-30	1/4-5/8	LFS-X5	Split grip	Cork/EVA	9+Tip
Open Water Spinning										
TLCP76MMFS	All Purpose	7'6"-1	M	MF	8-15	3/16-1/2	LFS-X5	Split grip	Cork/EVA	7+Tip
TLCP76MFS	All Purpose	7'6"-1	M	F	8-17	3/16-1/2	LFS-X5	Split grip	Cork/EVA	7+Tip
TLCP76MHFS	All Purpose	7'6"-1	MH	F	8-17	1/4-5/8	LFS-X5	Split grip	Cork/EVA	7+Tip
Ledge Casting										
TLCPJWR	Worm/Jig	7'2"-1	H	MF	14-25	3/8-1 1/2	LFS-X5	Full-length	Cork/EVA	9+Tip
TLCPHJR	Hair Jig	7'3.5"-1	MH	F	10-25	3/8-1	LFS-X5	Full-length	Cork/EVA	10+Tip
TLCPCRR	Carolina Rig	7'4.5"-1	MH	MF	12-25	1/4-1 1/2	LFS-X5	Full-length	Cork/EVA	10+Tip
TLCPSWBR	Swimbait	7'6"-1	MH	MF	14-25	1/4-1 1/2	LFS-X5	Full-length	Cork/EVA	9+Tip
TLCPCBR1	Small Crankbaits	7'6"-1	M	F	8-12	1/8-5/8	LFS-X5	Full-length	Cork/EVA	9+Tip
TLCPBSR	Big Spoon	7'10"-1	H	F	15-40	1-4	LFS-X5	Full-length	Cork/EVA	11+Tip
TLCPCBR2	Big Crankbaits	7'11"-1	MH	F	10-14	1/8-3/4	LFS-X5	Full-length	Cork/EVA	10+Tip
TLCPCBR3	Magnum Crankbaits	7'11"-1	MH	F	14-25	1/4-1 1/2	LFS-X5	Full-length	Cork/EVA	10+Tip
TLCPLRCB*	Long Range Crankbaits	9'0"-Tel	MH	F	10-17	1/8-3/4	LFS-X5	Full-length	Cork/EVA	12+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

LFS-X5



SUPER DUTY

MULTI-SPECIES RODS

BASS RODS

Super Duty® Series

- Premium HM60 graphite blank
- Bass Actions: full length Winn® Dri-Tac grips
- Multi-Species: Winn® split grip with extended foregrip
- Graphite skeletal reel seat
- Stainless steel guide frame with aluminum oxide inserts
- Multi-Species top guide have Zirconia insert for added strength
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Bass Casting										
SD68H	Peacock Bass	6'8"-1	H	F	20-65	1-4	HM60	Full-length	Winn®	8+Tip
SD76MH	Pitching/Flipping	7'6"-1	MH	F	12-50	1/2-1 1/2	HM60	Full-length	Winn®	10+Tip
SD76H	Pitching/Flipping	7'6"-1	H	F	20-65	1-4	HM60	Full-length	Winn®	10+Tip
SD711MH	Pitching/Flipping	7'11"-1	MH	MF	12-65	1/2-2	HM60	Full-length	Winn®	11+Tip
SD711H	Pitching/Flipping	7'11"-1	H	F	20-65	1-4	HM60	Full-length	Winn®	11+Tip
SD711XH	Pitching/Flipping	7'11"-1	XH	MF	30-80	4-10	HM60	Full-length	Winn®	11+Tip
Multi Species Casting										
SD76MHLH	Calico Bass	7'6"-1	MH	F	12-50	1/2-1 1/2	HM60	Split grip	Winn®	10+Tip
SD76HLH	Muskie	7'6"-1	H	F	20-65	1-4	HM60	Split grip	Winn®	10+Tip
SD711MHLH	Calico Bass	7'11"-1	MH	MF	12-65	1/2-2	HM60	Split grip	Winn®	11+Tip
SD711HLH	Calico Bass/Muskie	7'11"-1	H	F	20-65	1-4	HM60	Split grip	Winn®	11+Tip
SD711XHLH	Muskie	7'11"-1	XH	MF	30-80	4-10	HM60	Split grip	Winn®	11+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material



HIGH PERFORMANCE BLANK WITH PREMIUM POWER



Custom Lite Series

- Top-grade multilayer HM85, 85 million modulus graphite blank
- Stainless steel guide frame with titanium oxide inserts
- Winn® Dri-Tac split grip handle
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
LCLTWJB	Topwater/Jerkbait	6'8"-1	ML	F	6-10	1/8-1/2	HM85	Split grip	Winn®	9+Tip
LCLSBR	Spinnerbait	6'10"-1	MH	F	10-20	3/16-5/8	HM85	Split grip	Winn®	9+Tip
LCLBJR	Bladed Jig	6'11"-1	M	M	8-17	1/4-5/8	HM85	Split grip	Winn®	9+Tip
LCLAPC	All Purpose	7'0"-1	M	F	8-17	1/4-5/8	HM85	Split grip	Winn®	9+Tip
LCLMBR	Magnum Bass	7'0"-1	MH	F	12-25	1/4-7/8	HM85	Split grip	Winn®	9+Tip
LCLMGR	Magnum Grass	7'2"-1	H	F	14-65	3/8-1 1/2	HM85	Split grip	Winn®	9+Tip
LCLMH	Magnum Hammer	7'3"-1	MH	F	10-25	1/4-5/8	HM85	Split grip	Winn®	9+Tip
LCLMJR	Magnum Jig	7'3"-1	MH	MF	15-30	1/2-1	HM85	Split grip	Winn®	9+Tip
LCLMPS	Magnum Pitchin	7'4"-1	H	F	15-65	1/2-2	HM85	Split grip	Winn®	10+Tip
LCLFRH	Magnum Flippin	7'6"-1	H	F	15-65	3/16-2	HM85	Split grip	Winn®	10+Tip
LCLMCR	Magnum Casting	7'11"-1	MH	M	12-50	1/2-3	HM85	Split grip	Winn®	11+Tip
Spinning Rods										
LCLDSS	Drop Shot Special	6'10"-1	ML	XF	4-10	1/8-1/2	HM85	Split grip	Winn®	8+Tip
LCLDS	Dock Sniper	6'11"-1	M	XF	6-10	1/8-3/8	HM85	Split grip	Winn®	8+Tip
LCLSHS	Shakey Head Special	7'0"-1	M	XF	6-12	1/8-3/8	HM85	Split grip	Winn®	8+Tip
LCLMSR1	Magnum 1	7'0"-1	M	F	6-12	3/16-5/8	HM85	Split grip	Winn®	9+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic



COME THROUGH IN THE CLUTCH



CT-1™ COMFORTOUCH GRIPS

The grip fully encompasses the entire reel foot, providing the most comfortable grip ever produced on a spinning rod

G CLUTCH® HANDLE SYSTEM WITH MIDAS TOUCH®

Comfortable, lightweight, and ergonomic handles. The innovative design allows direct contact to the blank for ultimate sensitivity while placing the reel closer to the rod for a lower profile and better balance

Custom Series

- Lightweight, proprietary, multilayered, multidirectional, HM60 graphite blank
- Fuji Concept® O guides with deep pressed aluminum oxide inserts
- G Clutch® handle system with Midas Touch® on casting models
- CT-1™ ComfortTouch grips on spinning models
- Split grip EVA handles with duracork inlay
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
CJBS	Jerkbait Special	6'7"-1	ML	F	6-10	1/8-1/2	HM60	G Clutch	EVA/Cork	9+Tip
CTWS	Topwater Special	6'8"-1	M	MF	8-14	1/4-3/4	HM60	G Clutch	EVA/Cork	9+Tip
CSPS	Soft Plastic Special	6'10"-1	M	MF	10-20	3/16-5/8	HM60	G Clutch	EVA/Cork	9+Tip
CSBR	Spinnerbait	6'10"-1	MH	F	10-20	3/16-5/8	HM60	G Clutch	EVA/Cork	9+Tip
CWR1	Worm Rod 1	7'0"-1	MH	MF	12-20	3/16-5/8	HM60	G Clutch	EVA/Cork	9+Tip
CMBR1	Magnum Bass 1	7'0"-1	MH	F	12-25	1/4-7/8	HM60	G Clutch	EVA/Cork	9+Tip
CMFR	Magnum Frog	7'2"-1	H	F	14-65	3/8-1	HM60	G Clutch	EVA/Cork	10+Tip
CMBR2	Magnum Bass 2	7'2"-1	MH	F	12-20	3/8-1	HM60	G Clutch	EVA/Cork	10+Tip
CFJR	Finesse Jig	7'2"-1	MH	F	12-20	3/16-5/8	HM60	G Clutch	EVA/Cork	10+Tip
CFBJR	Football Jig	7'3"-1	H	MF	15-30	1/2-1	HM60	G Clutch	EVA/Cork	10+Tip
CMH	Magnum Hammer	7'3"-1	MH	F	10-25	1/4-5/8	HM60	G Clutch	EVA/Cork	10+Tip
CMPS	Magnum Pitchin	7'4"-1	H	F	15-65	1/2-2	HM60	G Clutch	EVA/Cork	10+Tip
CMBR3	Magnum Bass 3	7'6"-1	MH	MF	12-30	1/2-1	HM60	G Clutch	EVA/Cork	10+Tip
CMHC	Magnum Heavy Cover	7'6"-1	H	F	15-65	3/16-1	HM60	G Clutch	EVA/Cork	10+Tip
Casting Crankbait										
CSBC	Squarebill Crankbaits	6'9"-1	MH	MF	10-17	1/4-3/4	HM60	G Clutch	EVA/Cork	9+Tip
CWWS	Wart Special	7'0"-1	M	MF	8-14	1/4-5/8	HM60	G Clutch	EVA/Cork	9+Tip
CCBR1	Crankbait 1	7'2"-1	M	MF	15-30	1/2-1 1/4	HM60	G Clutch	EVA/Cork	10+Tip
CMCBR2	Magnum Crankbait 2	7'6"-1	MH	MF	10-25	1/2-1 3/8	HM60	G Clutch	EVA/Cork	10+Tip
CMCBR3	Magnum Crankbait 3	7'10"-1	MH	MF	12-25	1/2-1 3/8	HM60	G Clutch	EVA/Cork	10+Tip
Spinning Rods										
CDSS	Dropshot Special	6'10"-1	ML	XF	4-10	1/8-1/2	HM60	CT-1	EVA/Cork	8+Tip
CSHS	Shakey Head Special	7'0"-1	M	XF	6-12	1/8-3/8	HM60	CT-1	EVA/Cork	9+Tip
CMSR1	Magnum Spinning 1	7'0"-1	M	F	6-12	3/16-5/8	HM60	CT-1	EVA/Cork	9+Tip
CTS	Tube Special	7'2"-1	M	MF	8-30	1-4-5/8	HM60	CT-1	EVA/Cork	10+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic





TOUR TESTED TOUR READY



TP1 Black Series

- Premium HM50 tour grade high modulus graphite blank with Carbon Nano Tube construction
- American Tackle MicroWave™ guide system features stainless steel guide frames with Nanolite inserts

- VTR System (Vibration Transfer Ring) allows direct contact with the blank
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
TP1B68MF	Jerkbait/Topwater	6'8"-1	M	MF	8-12	1/8-1/2	HM50	Split	Winn	8+Tip
TP1B610MHF	Spinnerbait	6'10"-1	MH	MF	10-20	1/4-3/4	HM50	Split	Winn	8+Tip
TP1B70M	All Purpose	7'0"-1	M	MF	10-20	1/8-1/2	HM50	Split	Winn	8+Tip
TP1B70MH	Worm Rod	7'0"-1	MH	F	12-20	3/16-5/8	HM50	Split	Winn	8+Tip
TP1B72MF	Weightless Plastic	7'2"-1	M	F	10-20	3/16-5/8	HM50	Split	Winn	8+Tip
TP1B72MH	Jig Rod	7'2"-1	MH	F	12-30	1/4-1	HM50	Split	Winn	8+Tip
TP1B73MH	All Purpose	7'3"-1	MH	F	12-20	3/16-1	HM50	Split	Winn	8+Tip
TP1B74H	Pitchin	7'4"-1	H	F	15-65	3/16-1 1/2	HM50	Split	Winn	8+Tip
Spinning Rods										
TP1B66MLFS	Walleye	6'6"-1	ML	F	6-10	1/8-3/8	HM50	Split	Winn	8+Tip
TP1B69MLFS	Finesse Rod	6'9"-1	ML	F	6-10	1/8-3/8	HM50	Split	Winn	8+Tip
TP1B610MXFS	Walleye	6'10"-1	M	XF	6-12	1/4-5/8	HM50	Split	Winn	8+Tip
TP1B70MFS	Grub Rod	7'0"-1	M	F	6-14	3/16-5/8	HM50	Split	Winn	8+Tip
TP1B72MHS	Magnum 2	7'2"-1	MH	MF	8-30	3/16-3/4	HM50	Split	Winn	8+Tip
TP1B76MHFS	Open Water	7'6"-1	MH	F	8-17	1/4-5/8	HM50	Split	Winn	7+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

TP1X Series

- Premium HM40 graphite blank
- Stainless steel guides with aluminum oxide inserts
- Lew's exclusive graphite skeletal reel seat
- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
TP1X68MLF	Topwater/ Jerkbait	6'8"-1	ML	F	6-12	1/8-1/2	HM40	Split grip	Winn	7+Tip
TP1X610MHF	Spinnerbait/Plastics	6'10"-1	MH	F	10-20	3/16-5/8	HM40	Split grip	Winn	7+Tip
TP1X611MM-CB	Bladed Jig Rod	6'11"-1	M	M	8-17	1/4-5/8	HM40	Split grip	Winn	7+Tip
TP1X70M	All Purpose	7'0"-1	M	F	8-17	1/4-5/8	HM40	Split grip	Winn	7+Tip
TP1X70MH	All Purpose	7'0"-1	MH	F	12-25	1/4-7/8	HM40	Split grip	Winn	7+Tip
TP1X72MH	All Purpose	7'2"-1	MH	F	12-25	1/4-1	HM40	Split grip	Winn	7+Tip
TP1X73H	Pitching/ Grass/ Jigs	7'3"-1	H	F	14-65	3/8-1 1/2	HM40	Split grip	Winn	7+Tip
TP1X76H	Flipping/ A-Rig	7'6"-1	H	F	15-65	3/16-1 1/2	HM40	Split grip	Winn	8+Tip
Crankback Rods										
TP1X73MH-CB	Perfect Crankback	7'3"-1	MH	M	10-25	1/2-1 3/8	HM40	Split grip	Winn	8+Tip
Spinning Rods										
TP1X67MLFS	Ned Rig Rod	6'7"-1	ML	F	4-10	1/16-1/4	HM40	Split grip	Winn	7+Tip
TP1X69MLFS	Shakey Heads/Finesse	6'9"-1	ML	F	6-10	1/8-3/8	HM40	Split grip	Winn	7+Tip
TP1X611DS	Dock Sniper	6'11"-1	M	XF	6-10	1/8-3/8	HM40	Split grip	Winn	7+Tip
TP1X70MMFS	All Purpose	7'0"-1	M	MF	6-15	1/4-5/8	HM40	Split grip	Winn	7+Tip
TP1X70MHS	Worms/Jigs/Tubes	7'0"-1	MH	F	8-14	3/16-3/4	HM40	Split grip	Winn	7+Tip
TP1X60MS-2	All Purpose	6'0"-2	M	F	4-12	1/8-1/2	HM40	Split grip	Winn	7+Tip
TP1X66MS-2	All Purpose	6'6"-2	M	F	4-12	1/8-1/2	HM40	Split grip	Winn	7+Tip
TP1X70MS-2	All Purpose	7'0"-2	M	F	4-12	1/8-1/2	HM40	Split grip	Winn	7+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic



KVD SERIES RODS

BUILT BY THE BEST

“All of these rods have been thoroughly tested and the actions have been built exactly how I want them for each technique.”

KEVIN VANDAM
MLF Pro Angler

Kevin Vandam



KVD Series

- Premium IM8 graphite blank in GC and GS models
- Premium IM8 graphite/glass composite blank in CC models
- Stainless steel guides, aluminum oxide inserts, and Zirconia insert tip tops
- Lew's® proprietary full contact reel seats with increased blank contact on casting models

- Rear locking reel seat on spinning models
- EVA split grip handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RTG(LBS.)	LURE RTG(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Graphite Casting										
LKVDGC1	Jerkbait	6'8"-1	MH	F	12-25	3/8-3/4	IM8	Split grip	EVA	8+Tip
LKVDGC2	Jerkbait	6'10"-1	MH	F	12-25	3/8-3/4	IM8	Split grip	EVA	8+Tip
LKVDGC3	All Purpose Reaction	7'0"-1	M	F	10-20	3/16-1/2	IM8	Split grip	EVA	8+Tip
LKVDGC4	All Purpose Reaction	7'0"-1	MH	F	10-30	1/4-2	IM8	Split grip	EVA	8+Tip
LKVDGC5	Dock Skipping/Frog	7'2"-1	MH	XF	10-30	1/4-2	IM8	Split grip	EVA	9+Tip
LKVDGC6	Spinnerbait/Swim Jig/Topwater	7'4"-1	MH	XF	15-30	1/2-2	IM8	Split grip	EVA	9+Tip
LKVDGC7	Flipping/Pitching	7'4"-1	H	XF	10-20	3/8-1	IM8	Split grip	EVA	10+Tip
LKVDGC8	Fb Jig/Car. Rig/Big Spinnerbait	7'6"-1	H	XF	15-30	1/2-1 1/2	IM8	Split grip	EVA	10+Tip
LKVDGC9	Flipping/Pitching	7'6"-1	XH	XF	15-65	1/2-3	IM8	Split grip	EVA	10+Tip
LKVDGC10	Flipping/Pitching	7'10"-1	H	XF	15-30	1/2-1 1/2	IM8	Split grip	EVA	10+Tip
Graphite Spinning										
LKVDGS1	Dropshot/Finesse Dock	6'10"-1	M	XF	6-14	1/4-1/2	IM8	Split grip	EVA	8+Tip
LKVDGS2	Dropshot/Ned Rig	7'0"-1	ML	XF	6-14	1/8-3/8	IM8	Split grip	EVA	8+Tip
LKVDGS3	All Purpose Finesse	7'0"-1	M	XF	8-20	1/4-3/4	IM8	Split grip	EVA	8+Tip
LKVDGS4	All Purpose/Dock Rod	7'2"-1	ML	XF	6-14	1/8-3/8	IM8	Split grip	EVA	8+Tip
LKVDGS5	Shakey Head/Tube	7'2"-1	M	XF	8-20	1/4-3/4	IM8	Split grip	EVA	8+Tip
LKVDGS6	Smallmouth Special	7'4"-1	M	XF	8-20	1/4-3/4	IM8	Split grip	EVA	8+Tip
LKVDGS7	Smallmouth Special	7'6"-1	ML	XF	6-14	1/8-3/8	IM8	Split grip	EVA	8+Tip
Composite Casting										
LKVDCC1	Small Crankbaits	6'8"-1	ML	M	8-12	1/4-5/16	Composite	Split grip	EVA	9+Tip
LKVDCC2	Squarebill/Red Eye Shad	7'0"-1	M	M	10-17	1/4-3/8	Composite	Split grip	EVA	9+Tip
LKVDCC3	Accuracy Bladed Jig/KVD 2.5	7'1"-1	MH	M	12-20	1/4-1/2	Composite	Split grip	EVA	9+Tip
LKVDCC4	Medium Crankbaits	7'4"-1	MH	M	12-20	1/4-1/2	Composite	Split grip	EVA	9+Tip
LKVDCC5	Open Water Bladed Jig/KVD 2.5	7'4"-1	H	M	12-30	1/2-2	Composite	Split grip	EVA	9+Tip
LKVDCC6	Medium To Deep Crankbaits	7'10"-1	M	M	10-17	1/4-3/8	Composite	Split grip	EVA	9+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

BASS
WALLEYE
TROUT
PANFISH

CATCH THEM HOW YOU WANT

30 SPECIES SPECIFIC ACTIONS

Speed Stick® Series

- Premium IM8 graphite blank
- Fuji Concept® O guides with deep pressed aluminum oxide inserts
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Full length cork grips with Duracork inlays
- Trolling rods feature shrink tubing grip and extended shrink tubing foregrip
- Patented "No Foul" hook keeper



MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
LSS66M	Casting	6'6"-1	M	M	6-12	1/8-1/2	IM8	Full	Cork	8+Tip
LSS66MH	Casting	6'6"-1	MH	F	10-20	1/4-5/8	IM8	Full	Cork	8+Tip
LSS68MH	Casting	6'8"-1	MH	F	12-20	3/16-3/4	IM8	Full	Cork	8+Tip
LSS70M	Casting	7'0"-1	M	M	10-20	1/8-1/2	IM8	Full	Cork	9+Tip
LSS70MH	Casting	7'0"-1	MH	F	12-20	3/16-5/8	IM8	Full	Cork	9+Tip
LSS73MH	All Purpose	7'3"-1	MH	F	12-20	3/16-1	IM8	Full	Cork	9+Tip
LSS74H	Pitching/ Frog	7'4"-1	H	F	15-65	3/8-1 1/2	IM8	Full	Cork	9+Tip
LSS76H	Flipping	7'6"-1	H	F	15-65	3/8-2	IM8	Full	Cork	9+Tip
Spinning Rods										
LSS66MFS	Spinning	6'6"-1	M	F	4-12	1/8-3/8	IM8	Full	Cork	7+Tip
LSS69MLFS	Spinning	6'9"-1	ML	F	6-10	1/8-3/8	IM8	Full	Cork	8+Tip
LSS70MFS	Spinning	7'0"-1	M	F	6-14	3/16-5/8	IM8	Full	Cork	8+Tip
LSS70MHFS	Spinning	7'0"-1	MH	F	8-30	3/16-3/4	IM8	Full	Cork	8+Tip
Trout/Panfish Spin.										
LSS410ULS	Trout	4'10"-1	UL	F	2-6	1/32-3/16	IM8	Full	Cork	5+Tip
LSS50ULS	Panfish	5'0"-1	UL	M	2-6	1/16-1/4	IM8	Full	Cork	5+Tip
LSS54ULS	Trout/Panfish	5'4"-1	UL	F	2-6	1/32-3/16	IM8	Full	Cork	5+Tip
LSS60ULS	Trout/Panfish	6'0"-1	UL	F	2-6	1/32-3/16	IM8	Full	Cork	6+Tip
LSS68ULS	Panfish	6'8"-1	UL	F	2-6	1/32-3/16	IM8	Full	Cork	7+Tip
LSS70MLS	Trout/Panfish	7'0"-1	ML	F	4-10	1/16-5/16	IM8	Full	Cork	7+Tip
LSS80MLS-2	Panfish	8'0"-2	ML	F	4-10	1/8-3/8	IM8	Full	Cork	8+Tip
LSS90MLS-2	Panfish	9'0"-2	ML	MF	4-10	1/8-3/8	IM8	Full	Cork	8+Tip
Walleye Casting										
LSS70MMC	Rigging/Bottom Bouncer	7'0"-1	M	M	8-14	1/4-5/8	IM8	Full	Cork	8+Tip
Walleye Spinning										
LSS63MXFS	Vertical Jigging	6'3"-1	M	XF	6-10	1/8-1/2	IM8	Full	Cork	7+Tip
LSS67MXFS	Vertical Jigging	6'7"-1	M	XF	6-10	1/8-1/2	IM8	Full	Cork	7+Tip
LSS610MXFS	Glide Bait/Jerkbait	6'10"-1	M	XF	6-10	1/8-1/2	IM8	Full	Cork	7+Tip
LSS70MLFS	Live Bait	7'0"-1	ML	F	4-10	1/8-3/8	IM8	Full	Cork	8+Tip
LSS76MLFS	Live Bait	7'6"-1	ML	F	4-10	1/8-3/8	IM8	Full	Cork	8+Tip
Walleye Trolling										
LSS76MMT-TEL*	Planer Boards	7'6"-1	M	M	10-20	1/8-1/2	IM8	Full	Cork/EVA	8+Tip
LSS86MMT-TEL*	Planer Boards	8'6"-1	M	M	10-20	1/8-1/2	IM8	Full	Cork/EVA	8+Tip
LSS66MMT	Flat Line Trolling	6'6"-1	M	M	15-30	3/8-3/4	IM8	Full	Cork/EVA	8+Tip
LSS106MMT-2	Flat Line Trolling	10'6"-2	M	M	15-30	3/8-3/4	IM8	Full	Cork/EVA	11+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

RODS

KVD SERIES & SPEED STICKS

IMB

Fuji



PALMER HANDLE

David Fritts Perfect Crankbait Series

- Premium HM42 graphite/glass composite blank
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with cushioned stainless steel hoods

- Premium cork handle with high density EVA butt cap
- Loop style hook keeper designed especially for crankbaits
- Perfect Palmer model features "Palmer" support reel seat for reduced arm fatigue while deep cranking

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
LDFP68MH	Crankbait Rod	6'8"-1	MH	M	10-17	1/4-3/4	HM42	Full	Cork	9+Tip
LDFP70M	Crankbait Rod	7'0"-1	M	M	10-25	3/8-1	HM42	Full	Cork	9+Tip
LDFP70MH	Crankbait Rod	7'0"-1	MH	M	15-30	1/2-1 1/4	HM42	Full	Cork	9+Tip
LDFP76MH	Crankbait Rod	7'6"-1	MH	M	15-30	1/2-1 1/4	HM42	Full	Cork	10+Tip
LDFP711MH	Crankbait Rod	7'11"-1	MH	M	15-30	1/2-3	HM42	Full	Cork	10+Tip
LDFP90MH*	Crankbait Rod	9'0"-Tel	MH	M	15-30	1/2-3	HM42	Full	Cork	10+Tip
Perfect Palmer CB										
LDFP76MHP	Crankbait Rod	7'6"-1	MH	M	15-30	1/2-1 1/4	HM42	Split	Cork	10+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic



Laser® SG1 Series

- Premium IM6 graphite blank
- Stainless steel guides with aluminum oxide inserts
- Lew's exclusive graphite skeletal reel seat

- Split grip cork handle with EVA butt
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Pistol Grip Casting									
LSG160MFPC	6'0"-1	M	F	8-17	1/4-5/8	IM6	Pistol	Cork	8+Tip
Casting Rods									
LSG166MFC	6'6"-1	M	F	6-12	1/8-1/2	IM6	Split	Cork/EVA	9+Tip
LSG1610MHFC	6'10"-1	MH	F	10-20	1/4-3/4	IM6	Split	Cork/EVA	9+Tip
LSG170MFC	7'0"-1	M	F	6-12	1/8-1/2	IM6	Split	Cork/EVA	9+Tip
LSG170MHFC	7'0"-1	MH	F	12-25	1/4-7/8	IM6	Split	Cork/EVA	9+Tip
LSG173MHFC	7'3"-1	MH	F	10-25	1/4-5/8	IM6	Split	Cork/EVA	10+Tip
LSG174HC	7'4"-1	H	MF	15-65	1/2-2	IM6	Split	Cork/EVA	10+Tip
Spinning Rods									
LSG160ULFS	6'0"-1	UL	F	4-8	1/32-1/4	IM6	Split	Cork/EVA	6+Tip
LSG160MLFS	6'0"-1	ML	F	4-10	1/16-5/16	IM6	Split	Cork/EVA	6+Tip
LSG166MLFS	6'6"-1	ML	F	4-10	1/16-5/16	IM6	Split	Cork/EVA	7+Tip
LSG166MFS	6'6"-1	M	F	4-12	1/8-3/8	IM6	Split	Cork/EVA	7+Tip
LSG166MHFS	6'6"-1	MH	F	6-14	1/4-5/8	IM6	Split	Cork/EVA	7+Tip
LSG170ULFS	7'0"-1	UL	F	4-8	1/32-1/4	IM6	Split	Cork/EVA	8+Tip
LSG170MFS	7'0"-1	M	F	6-12	1/8-1/2	IM6	Split	Cork/EVA	8+Tip
LSG170MHFS	7'0"-1	MH	F	8-14	1/4-5/8	IM6	Split	Cork/EVA	8+Tip
2-Piece Casting									
LSG170MFC-2	7'0"-2	M	F	4-12	1/8-1/2	IM6	Split	Cork/EVA	9+Tip
2-Piece Spinning									
LSG166LS-2	6'6"-2	L	F	4-8	1/32-1/4	IM6	Split	Cork/EVA	7+Tip
LSG166MFS-2	6'6"-2	M	F	4-12	1/8-1/2	IM6	Split	Cork/EVA	7+Tip
LSG170LS-2	7'0"-2	L	F	4-8	1/32-1/4	IM6	Split	Cork/EVA	8+Tip
LSG170MFS-2	7'0"-2	M	F	4-12	1/8-1/2	IM6	Split	Cork/EVA	8+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material

HM42

IM6

IM6

IM6

PREMIUM CRANKING POWER AT A PERFECT PRICE

DAVID FRITTS PERFECT RODS
7 CRANKING SPECIFIC ACTIONS



Wally Marshall™ Troll Tech Series

- Premium IM6 graphite blank
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with metal hoods
- Split grip EVA handles
- Stainless steel corrosion resistant hook keeper
- Rod length indicator

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
2-Piece Casting Rods										
WMT10-2	Trolling	10'-2	MH	M	10-25	1/4-1	IM6	Full	EVA	12+Tip
WMT12-2	Trolling	12'-2	MH	M	10-25	1/4-1	IM6	Full	EVA	13+Tip
3-Piece Casting Rods										
WMT14-3	Trolling	14'-3	MH	M	10-25	1/4-1	IM6	Full	EVA	14+Tip
WMT16-3	Trolling	16'-3	MH	M	10-25	1/4-1	IM6	Full	EVA	15+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material

IM6



Mr.Striper® Series Rods

- Graphite/glass blank
- Stainless steel guides with stainless steel inserts
- Graphite reel seat with cushioned stainless steel hood
- EVA full length handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
MS70MHC	Casting	7'0"-1	MH	F	12-25	3/8-1	Graphite/Glass	Full grip	EVA	6+Tip
MS76MLCD	Down Cast	7'6"-1	ML	F	6-20	1/4-3/4	Graphite/Glass	Full grip	EVA	6+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material



Bream Stick Rods

- Telescopic graphite/glass blank
- Stainless steel line holding system with built in hook keeper
- EVA full length handle
- Tether tip cap for storage

MODEL	TYPE	LGTH/SECTIONS	POWER	ACTION	BLANK	HANDLE STYLE	HANDLE MAT.
LBS10	Telescopic	10'0"-3	UL	L	Graphite/Glass	Full Grip	EVA
LBS12	Telescopic	12'0"-4	UL	L	Graphite/Glass	Full Grip	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material



Wally Marshall™ Speed Shooter Series

- Premium IM8 graphite blank
- American Tackle MicroWave™ Air guide system features stainless steel guide frames with ringless inserts
- Lew's exclusive graphite skeletal reel seat
- Split grip EVA handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Spinning Rods										
WMSS56ML	Dock Shooting	5'6"-1	ML	F	4-10	1/16-1/4	IM8	Split	EVA	6+Tip
WMSS60ML	Dock Shooting	6'0"-1	ML	F	4-10	1/16-1/4	IM8	Split	EVA	6+Tip
WMSS66ML	Dock Shooting	6'6"-1	ML	F	4-10	1/16-1/4	IM8	Split	EVA	6+Tip
WMSS70ML	Dock Shooting	7'0"-1	ML	F	4-10	1/16-1/4	IM8	Split	EVA	7+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

IM8



MICROWAVE
LINE CONTROL SYSTEM



Wally Marshall™ Speed Stick® Series

- Premium IM8 two-piece graphite blank
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat
- EVA full length handles
- Patented "No Foul" hook keeper
- Rod length indicator

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
WMSS80-2	Jigging/Dipping	8'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	11+Tip
WMSS90-2	Jigging/Dipping	9'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	12+Tip
WMSS10-2	Jigging/Dipping	10'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	12+Tip
WMSS11-2	Jigging/Dipping	11'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	12+Tip
WMSS12-2	Jigging/Dipping	12'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	12+Tip
WMSS14-2	Jigging/Dipping	14'0"-2	ML	M	4-12	1/16-1/4	IM8	Full Grip	EVA	13+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

IM8



GRAB AND GO COMBOS

LEW'S CASTING & SPINNING COMBOS

We believe there should be no sacrifice in quality when you purchase a combo with our name on it. Building combos with premium components is essential in our minds.

- Team Lew's



Speed Spool® LFS Combo

REEL FEATURES:

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with graphite sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High Strength solid brass Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed anodized aluminum handle with SoftTouch paddle knobs
- Anodized aluminum 34mm spool

ROD FEATURES:

- Premium HM30 high modulus graphite blank
- Stainless steel guide frames with aluminum oxide inserts
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Premium cork split grip handles with cork/EVA butt
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
SS1SHA70MH	7'0"-1	MH	Fast	10-25	3/16-3/4	120/12	120/50	7.5:1	31"	15 lbs.	Right
SS1SHLA70MH	7'0"-1	MH	Fast	10-25	3/16-3/4	120/12	120/50	7.5:1	31"	15 lbs.	Left

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



NEW MODELS

Speed Spin® Combo

REEL FEATURES:

- 10 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- High strength Speed Gears® cut on Hamai CNC machines
- Solid brass pinion gear and stainless steel main shaft
- Screw in aluminum handle with Combat Grip® paddle knob
- Double anodized braid ready knurled aluminum spool

ROD FEATURES:

- Premium HM30 high modulus graphite blank
- Stainless steel guide frames with aluminum oxide inserts
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Premium full cork and split-grip cork handles
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
Full Length Grip											
SS20HS66MLS	6'6"-1	ML	Fast	6-12	1/8-3/8	145/8	200/15	6.2:1	32"	9 lbs.	R/L
SS20HS70MLS	7'0"-1	ML	Fast	6-12	1/8-3/8	145/8	200/15	6.2:1	32"	9 lbs.	R/L
Split Grip											
NEW SS10HS510L-2	5'10"-2	L	Fast	4-10	1/16-1/4	90/6	100/10	5.2:1	23"	7 lbs.	R/L
NEW SS20HS60MLS	6'0"-1	ML	Fast	6-12	1/8-3/8	145/8	200/15	6.2:1	32"	9 lbs.	R/L
SS30HS66MS	6'6"-1	M	Fast	6-12	1/8-1/2	160/10	180/20	6.2:1	35"	13 lbs.	R/L
SS30HS69MFS	6'9"-1	M	Fast	6-12	3/16-5/8	160/10	180/20	6.2:1	35"	13 lbs.	R/L
SS30HS70MS	7'0"-1	M	Fast	6-12	1/8-1/2	160/10	180/20	6.2:1	35"	13 lbs.	R/L
SS30HS70MHS	7'0"-1	MH	Fast	8-30	3/16-3/4	160/10	180/20	6.2:1	35"	13 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack





Laser® MG Combo

REEL FEATURES:

- 8 bearing system
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines

ROD FEATURES:

- IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
LSG1HAMG66MH	6'6"-1	MH	Fast	10-20	3/8-3/4	110/12	110/50	6.8:1	27"	15 lbs.	Right
LSG1SHAMG610MH	6'10"-1	MH	Fast	10-20	3/8-3/4	110/12	110/50	7.5:1	30"	15 lbs.	Right
LSG1HAMG70MH	7'0"-1	MH	Fast	10-20	3/8-3/4	110/12	110/50	6.8:1	27"	15 lbs.	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



David Fritts Crank Back Combo

REEL FEATURES:

- 5 bearing system
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally Adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines

ROD FEATURES:

- IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
DFISCB70MH	7'0"-1	MH	Moderate	10-25	3/8-1	120/12	120/50	5.4:1	23"	15 lbs.	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Mr. Striper® Combo

REEL FEATURES:

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Stick frame construction with brass main gear and crankshaft
- On/off bait clicker
- Carbon fiber/stainless steel drag system
- 100mm power handle

ROD FEATURES:

- IM6 graphite/glass blank
- Stainless steel guide frames with aluminum oxide inserts
- Graphite reel seat
- EVA full length grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MS6070MH	7'0"-1	MH	Mod. Fast	12-25	3/8-1	330/20	475/50	4.2:1	19"	13 lbs.	Right

H = Heavy, MH = Medium Heavy, ML = Medium Light, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



NEW MODELS

Laser® SG Combo

REEL FEATURES:

- 8 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- Aluminum handle

ROD FEATURES:

- Premium IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
NEW LSG10A56UL	5'6"-1	UL	Fast	2-8	1/32-1/4	120/6	150/8	5.2:1	25"	7 lbs.	R/L
NEW LSG10A60UL	6'0"-1	UL	Fast	2-8	1/32-1/4	120/6	150/8	5.2:1	25"	7 lbs.	R/L
LSG20A60M-2	6'0"-2	M	Fast	4-12	1/8-1/2	120/8	180/10	5.2:1	25"	14 lbs.	R/L
LSG20A66ML	6'6"-1	ML	Fast	4-10	1/16-1/4	120/8	180/10	5.2:1	25"	14 lbs.	R/L
NEW LSG20A66ML-2	6'6"-2	ML	Fast	4-10	1/16-1/4	120/8	180/10	5.2:1	25"	14 lbs.	R/L
LSG30A66M	6'6"-1	M	Fast	4-12	1/8-1/2	180/10	250/15	5.2:1	27"	14 lbs.	R/L
LSG30A66M-2	6'6"-2	M	Fast	4-10	1/8-1/2	180/10	250/15	5.2:1	27"	14 lbs.	R/L
LSG40A70M-2	7'0"-2	M	Fast	4-12	1/8-1/2	190/12	300/20	5.2:1	30"	18 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Wally Marshall™ Speed Shooter Combo

REEL FEATURES:

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame, sideplate and skeletal rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Folding handle

ROD FEATURES:

- IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
WMSS10060ML	6'0"-1	ML	Fast	4-10	1/16-1/4	160/6	5.1:1	23.5"		R/L
WMSS10066ML	6'6"-1	ML	Fast	4-10	1/16-1/4	160/6	5.1:1	23.5"		R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Laser® Lite Combo

REEL FEATURES:

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Folding handle

ROD FEATURES:

- IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
LLS5050L-1	5'0"-1	L	Fast	2-6	1/32-1/4	120/4	5.0:1	21"	R/L
LLS7556L-1	5'6"-1	L	Fast	2-6	1/32-1/4	120/6	5.0:1	22"	R/L
LLS7560L-1	6'0"-1	L	Fast	2-6	1/32-1/4	120/6	5.0:1	22"	R/L
LLS10066UL-2	6'6"-2	UL	Fast	2-6	1/32-1/8	160/6	5.1:1	23.5"	R/L
LLS10070UL-2	7'0"-2	UL	Fast	2-6	1/32-1/8	160/6	5.1:1	23.5"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Hypersonic Combo

REEL FEATURES:

- 4 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Folding handle

ROD FEATURES:

- IM6 2-piece graphite blank
- Stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
HS2060L-2	6'0"-2	L	Fast	2-8	1/8-1/2	120/8	5.1:1	23"	11 lbs.	R/L
HS3066M-2	6'6"-2	M	Fast	4-10	1/8-1/2	140/10	5.1:1	25"	11 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Cat Daddy® Spinning Combo

REEL FEATURES:

- Ball bearing system
- 32-point multi-stop anti-reverse system
- Graphite frame, sideplate, and rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Folding handle
- Pre-spooled with 15 lb. Mr. Catfish Hi-Vis premium mono on the 7' combo and 20 lb. on the 9' combo

ROD FEATURES:

- 2-piece fiberglass blank
- Stainless steel guide frames with aluminum oxide inserts
- Skeletal graphite reel seat with stainless steel hood
- EVA split-grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	REEL SIZE	LINE RTG(LBS.)	LURE RTG(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
CDS5070MH-2	7'0"-2	MH	Fast	50	10-20	3/8-2	285/15	400/30	5.1:1	32"	13 lbs.	R/L
CDS6090MH-2	9'0"-2	MH	Fast	60	15-30	1-5	255/20	450/50	5.1:1	34"	13 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Speed Cast® & Speed Cast Mini Combo

REEL FEATURES:

- 2 bearing system
- Stainless steel cone and dual pick-up pins
- Combat Grip® thumb bar
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Graphite handle with Combat Grip® paddle knob
- Pre-spooled with premium monofilament

ROD FEATURES:

- Premium IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Graphite skeletal reel seat
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SSC156L	5'6"-1	L	Fast	2-6	1/32-1/4	125/4	4.4:1	18"	R/L
SSC260M	6'0"-1	M	Fast	6-12	1/8-3/8	100/6	4.4:1	24"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Speed Cast Underspin Combo

REEL FEATURES:

- 2 bearing system
- Stainless steel cone and dual pick-up pins
- Ergonomically designed trigger
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Graphite handle with Combat Grip® paddle knob
- Pre-spooled with premium monofilament

ROD FEATURES:

- Premium IM6 graphite blank
- Stainless steel guide frames with stainless steel inserts
- Graphite skeletal reel seat
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SUS156L	5'6"-1	L	Fast	2-4	1/32-1/4	125/4	4.4:1	16"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



MODEL SSC156L

MODEL SSC260M

EXCEL INSHORE AND BEYOND



CT-1™ COMFORTTOUCH GRIPS

The grip fully encompasses the entire reel foot, providing the most comfortable grip ever produced on a spinning rod

G CLUTCH® HANDLE SYSTEM WITH MIDAS TOUCH®

Comfortable, lightweight, and ergonomic handles. The innovative design allows direct contact to the blank for ultimate sensitivity while placing the reel closer to the rod for a lower profile and better balance

Inshore Series

- Premium HM40 graphite blank
- Stainless steel guides with aluminum oxide inserts
- G Clutch® handle system with Midas Touch® on casting models
- CT-1™ ComfortTouch grip with extended foregrip on spinning models

- Lew's exclusive SoftTouch graphite skeletal reel seat
- Winn® Dri-Tac split grip handles
- Professional style stainless steel hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
ISS66MC	Wading Special	6'6"-1	M	F	8-14	1/16-1/2	HM40	G Clutch	Winn	8+Tip
ISS69MC	Tops N Tails	6'9"-1	M	F	8-15	1/16-3/4	HM40	G Clutch	Winn	8+Tip
ISS70MLC	Inshore Special	7'0"-1	ML	MF	8-20	1/16-5/8	HM40	G Clutch	Winn	8+Tip
ISS70MC	Inshore Special	7'0"-1	M	MF	8-15	1/16-5/8	HM40	G Clutch	Winn	8+Tip
ISS70MHC	Inshore Redfish Special	7'0"-1	MH	F	10-20	3/16-5/8	HM40	G Clutch	Winn	8+Tip
ISS76MC	Croaker Special	7'6"-1	M	M	10-20	1/4-3/4	HM40	G Clutch	Winn	8+Tip
Spinning Rods										
ISS70MLS	Inshore Medium Light	7'0"-1	ML	MF	8-14	1/16-3/8	HM40	CT-1	Winn	9+Tip
ISS70MS	Inshore Medium	7'0"-1	M	MF	8-20	1/16-5/8	HM40	CT-1	Winn	9+Tip
ISS72MHS	Nearshore Special	7'2"-1	MH	MF	10-25	1/4-1	HM40	CT-1	Winn	9+Tip
ISS73MS	Nearshore Special	7'3"-1	M	F	10-20	1/4-3/4	HM40	CT-1	Winn	9+Tip
ISS76MHS	Nearshore Special	7'6"-1	MH	MF	10-25	3/8- 1 1/2	HM40	CT-1	Winn	9+Tip
ISS71HS	Nearshore Special	7'11"-1	H	MF	15-30	3/8-2	HM40	CT-1	Winn	10+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic



- AF
- C45 CARBON
- Winn
- SPEED DIAL
- SPEED KEEPER
- SPEED GEARS
- MSB Multi-Setting Brake
- 10 Bearing System

Custom Inshore SLP Series

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with drain ports
- C45 carbon sideplate on handle side, graphite palming sideplate
- Main gear passivation treatment for improved corrosion resistance
- Multi-Setting Brake (MSB) system utilizes externally adjustable magnetic and 4-pin internally adjustable centrifugal braking
- External lube port
- Patented Speed Dial® line indicator allows for easy identification of line type and pound test
- Patented retractable Speed Keeper® hook keeper allows you to secure lures and Texas rigged baits without scratching your reel
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- 95mm bowed anodized aluminum handle with Winn® Dri-Tac knobs
- Double anodized forged aluminum 32mm U-style spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CI1SH	9+1	7.5:1	30"	140/12	140/50	6.6	20 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



- AF
- C60 CARBON
- Winn
- SPEED GEARS
- 7 Bearing System
- SKELETAL SPEED ROTOR
- WINN® DRI-TAC KNOB

Custom Inshore Series

- 7 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- Aluminum frame and sideplate
- Main gear passivation treatment for improved corrosion resistance
- Flush and drain port that allows you to flush out your reel with a water dispersing spray if accidentally submerged
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- C60 carbon skeletal rotor
- 20 lb. max carbon fiber drag system
- High strength Speed Gears® with a strong, lightweight aluminum pinion gear cut on Hamai CNC machines
- Screw in aluminum handle with Winn® Dri-Tac knob
- Double anodized braid ready aluminum spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
CI300	6+1	6.2:1	34"	160/10	160/40	9.0	22 lbs.	R/L
CI400	6+1	6.2:1	37"	190/12	190/50	10.2	24 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



- AF
- COMBAT GRIP
- SPEED GEARS
- MCS Magnetic Control System
- 7 Bearing System
- P2 SUPER PINION

Inshore Speed Spool® LFS Series

- 7 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece aluminum frame with three external drain ports and graphite sideplates
- Externally adjustable Magnetic Control System (MCS)
- Combat Grip® thumb bar
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Zirconia line guide
- 20 lb. max carbon fiber drag system
- High Strength solid brass Speed Gears®, precision cut on Hamai CNC machines with P2 Super Pinion® bearing supported pinion gear
- 95mm bowed anodized aluminum handle with Combat Grip® knobs
- Double anodized aluminum 34mm U-style spool

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
SSN1SH	6+1	7.5:1	31"	140/12	140/50	7.3	20 lbs.	Right
SSN1SHL	6+1	7.5:1	31"	140/12	140/50	7.3	20 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

BUILT WITH GIVING BACK IN MIND

The Lew's American Hero series is more than just rods and reels; it is our promise. With a sincere respect for and in genuine honor of our American veterans, Lew's® pledges a portion of profits from the sale of every American Hero rod, along with select other Lew's products, for the purpose of supporting and helping organized programs that benefit the mind, spirit, soul and body of our veterans in their return to enjoying recreational opportunities outdoors, such as fishing.

“I've always admired the Lew's brand for their quality of product and their pledge to support our Military and First Responders. Being part of the Lew's Team and the American Hero program means a lot to me.”

SGM Jamey Caldwell (Ret.)
US Army Special Operations



American Hero® Camo Combo

REEL FEATURES:

- 6 bearing system
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Combat Grip® thumb bar
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- Anodized bowed aluminum handle with Combat Grip® paddle knobs

ROD FEATURES:

- IM7 graphite blank
- Gunsmoke stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
AHC1SH610MH	6'10"-1	MH	Fast	10-20	1/4-3/4	120/12	120/50	7.1:1	31"	15 lbs.	Right
AHC1SHL610MH	6'10"-1	MH	Fast	10-20	1/4-3/4	120/12	120/50	7.1:1	31"	15 lbs.	Left
NEW AHC1SH70M	7'0" -1	M	Fast	8-17	1/4-5/8	120/12	120/50	7.1:1	31"	15 lbs.	Right
NEW AHC1SHL70M	7'0" -1	M	Fast	8-17	1/4-5/8	120/12	120/50	7.1:1	31"	15 lbs.	Left
NEW AHC1SH70MH	7'0"-1	MH	Fast	10-20	1/4-3/4	120/12	120/50	7.1:1	31"	15 lbs.	Right
NEW AHC1SHL70MH	7'0"-1	MH	Fast	10-20	1/4-3/4	120/12	120/50	7.1:1	31"	15 lbs.	Left

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero Combo

REEL FEATURES:

- 5 bearing system
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- Anodized bowed aluminum handle with paddle knobs

ROD FEATURES:

- IM6 graphite blank
- Gunsmoke stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
AH1H66MH	6'6"-1	MH	Fast	10-20	3/8-1	120/12	120/50	6.4:1	28"	15 lbs.	Right
AH1SH610MH	6'10"-1	MH	Fast	10-20	3/8-1	120/12	120/50	7.1:1	31"	15 lbs.	Right
AH1H70MH	7'0"-1	MH	Fast	10-20	3/8-1	120/12	120/50	6.4:1	28"	15 lbs.	Right
AH1HL70MH	7'0"-1	MH	Fast	10-20	3/8-1	120/12	120/50	6.4:1	28"	15 lbs.	Left

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero® Camo Spinning Combo

REEL FEATURES:

- 6 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- Aluminum handle with Combat Grip® knob

ROD FEATURES:

- IM7 2-piece graphite blank
- Gunsmoke stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
NEW AHC1056UL-2	5'6"-2	UL	Fast	4-10	1/16-1/4	120/6	150/8	6.2:1	30"	13 lbs.	R/L
AHC2060M-2	6'0"-2	M	Fast	4-10	1/8-1/2	120/8	180/10	6.2:1	31"	13 lbs.	R/L
AHC3066M-2	6'6"-2	M	Fast	4-10	1/8-1/2	145/10	250/15	6.2:1	32"	17 lbs.	R/L
AHC4070M-2	7'0"-2	M	Fast	4-12	1/8-1/2	185/12	300/20	6.2:1	35"	17 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero Spinning Combo

REEL FEATURES:

- 5 bearing system
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, precision cut on Hamai CNC machines
- Aluminum handle with paddle knob

ROD FEATURES:

- IM6 2-piece graphite blank
- Gunsmoke stainless steel guide frames with stainless steel inserts
- Skeletal graphite reel seat
- EVA split-grips
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	BRAID CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
AH2060M-2	6'0"-2	M	Fast	4-12	1/8-1/2	120/8	180/10	6.2:1	31"	13 lbs.	R/L
AH3066M-2	6'6"-2	M	Fast	4-12	1/8-1/2	145/10	250/15	6.2:1	32"	17 lbs.	R/L
AH4070M-2	7'0"-2	M	Fast	4-12	1/8-1/2	185/12	300/20	6.2:1	35"	17 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero WE GO® 2 Combo

REEL FEATURES:

- 3 bearing system
- Graphite body, rotor and spool
- Oiled felt multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Folding handle
- Pre-spooled with premium 6 lb. monofilament

ROD FEATURES:

- IM6 2-piece graphite blank
- Stainless steel guide frames with stainless steel inserts
- Reel seat with cushioned stainless steel hoods
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	GEAR RATIO	RPT	RETRIEVE
WG7550L-2	5'0"-2	L	Fast	4-10	1/4-3/8	120/6	5.0:1	22"	R/L
WG1056M-2	5'6"-2	M	Fast	4-12	1/8-1/2	160/6	5.2:1	23"	R/L
WG1560M-2	6'0"-2	M	Fast	4-12	1/8-1/2	100/8	5.2:1	23"	R/L
WG2066M-2	6'6"-2	M	Fast	4-12	1/8-1/2	150/8	5.1:1	24"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero Camo Spincast Combo

REEL FEATURES:

- Dual-pin line pick up system
- Double anodized aluminum cone
- Injection molded body
- Nickel plated handle with Combat Grip® paddle knobs
- Pre-spooled with premium 8 lb. monofilament

ROD FEATURES:

- IM6 2-piece graphite blank
- Stainless steel guide frames with stainless steel inserts
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	GEAR RATIO	RPT	RETRIEVE
AHCM2060M-2	6'0"-2	M	Fast	4-10	1/8-1/2	90/8	3.4:1	16"	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero WE GO Metal Cone Spincast Combo

REEL FEATURES:

- Dual-pin line pick up system
- Double anodized aluminum cone
- Injection molded body
- Nickel chrome plated steel handle with SoftTouch paddle knobs
- Pre-spooled with premium 8 lb. monofilament

ROD FEATURES:

- IM6 2-piece graphite blank
- Stainless steel guide frames with stainless steel inserts
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
AHM2060M-2	6'0"-2	M	Fast	4-10	1/8-1/2	90/8	3.4:1	16"	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



American Hero WE GO ABS Spincast Combo

REEL FEATURES:

- Dual-pin line pick up system
- Engineered ABS cone
- Injection molded body
- Nickel chrome plated steel handle with SoftTouch paddle knob
- Pre-spooled with premium 8 lb. monofilament

ROD FEATURES:

- IM6 2-piece graphite blank
- Stainless steel guide frames with stainless steel inserts
- EVA split-grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	MONO CAP.	GEAR RATIO	RPT	RETRIEVE
WGC2056M-2	5'6"-2	M	Fast	4-10	1/8-1/2	90/8	3.4:1	16"	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand





American Hero[®] Camo Series

- 6 bearing system
- Zero Reverse[®] one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Combat Grip[®] thumb bar
- Rulon drag system
- Speed Lube[®] for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears[®], precision cut on Hamai CNC machines
- Anodized bowed aluminum handle with Combat Grip[®] paddle knobs

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
AHC1SH OR C	5+1	7.1:1	31"	120/12	120/50	7.2	15 lbs.	Right
AHC1SHL	5+1	7.1:1	31"	120/12	120/50	7.2	15 lbs.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam

American Hero Series

- 5 bearing system
- Zero Reverse[®] one-way clutch bearing
- One-piece graphite frame and sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube[®] for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears[®], precision cut on Hamai CNC machines
- Anodized bowed aluminum handle with paddle knobs

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
AHIH	4+1	6.4:1	28"	120/12	120/50	7.2	15 lbs.	Right
AHIHL	4+1	6.4:1	28"	120/12	120/50	7.2	15 lbs.	Left
AHISH OR C	4+1	7.1:1	31"	120/12	120/50	7.2	15 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam

American Hero Camo Spinning Series

- 6 bearing system
- Zero Reverse[®] one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube[®] for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears[®], precision cut on Hamai CNC machines
- Folding aluminum handle with Combat Grip[®] knob

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
AHC200 OR C	5+1	6.2:1	31"	120/8	180/10	9.0	13 lbs.	R/L
AHC300 OR C	5+1	6.2:1	32"	145/10	250/15	10.0	13 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | C = Clam



SPEED GEARS
SKELETAL SPEED ROTOR
5 Bearing System



MODEL
AHBC2C

MODEL
AHSC2C

American Hero Spinning Series

- 5 bearing system
- Zero Reverse[®] one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oiled felt multi-disc drag system
- Speed Lube[®] for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears[®], precision cut on Hamai CNC machines
- Aluminum handle with paddle knob

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
AH100 OR C	4+1	6.2:1	30"	120/6	150/8	8.7	13 lbs.	R/L
AH200 OR C	4+1	6.2:1	31"	120/8	180/10	8.9	13 lbs.	R/L
AH300 OR C	4+1	6.2:1	32"	145/10	250/15	9.9	17 lbs.	R/L
AH400 OR C	4+1	6.2:1	35"	185/12	300/20	10.4	17 lbs.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

American Hero Spincast Series

METAL CONE SPINCAST REEL

- Dual-pin line pick up system
- Double anodized aluminum cone
- Injection molded body
- Steel handle with SoftTouch paddle knobs
- Pre-spooled with premium 8 lb. mono

WE GO[®] ABS SPINCAST REEL

- Dual-pin line pick up system
- Engineered ABS cone
- Injection molded body
- Steel handle with SoftTouch paddle knob
- Pre-spooled with premium 8 lb. mono

MODEL	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
AHBC2C (Metal Cone)	3.4:1	16"	90/8	7.4	5 lbs.	Right
AHSC2C (ABS)	3.4:1	16"	90/8	6.8	5 lbs.	Right

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



IM7

American Hero Series

- Premium IM7 graphite blank
- Stainless steel guides with stainless steel inserts
- Lew's exclusive graphite skeletal reel seat

- Split grip EVA handles
- Pistol grip EVA handle on model AH60MCP
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
AH60MCP	Pistol Grip	6'0"-1	M	F	6-12	1/16-3/4	IM7	Pistol	EVA	7+Tip
AH66MHC	Casting	6'6"-1	MH	F	10-20	3/8-1	IM7	Split	EVA	8+Tip
AH70MC	Casting	7'0"-1	M	F	8-17	1/4-5/8	IM7	Split	EVA	8+Tip
AH70MHC	Casting	7'0"-1	MH	F	10-20	3/8-1 1/2	IM7	Split	EVA	8+Tip
AH70MHCBC	Crankbait	7'0"-1	MH	F	12-30	1/2-1 1/4	IM7	Split	EVA	8+Tip
AH76HC	Flipping	7'6"-1	H	F	20-40	1/2-2	IM7	Split	EVA	9+Tip
AH169MFC	Inshore	6'9"-1	M	F	8-15	1/16-3/4	IM7	Split	EVA	8+Tip
Spinning Rods										
AH66MS	Spinning	6'6"-1	M	F	4-12	1/8-1/2	IM7	Split	EVA	7+Tip
AH70MS	Spinning	7'0"-1	M	F	4-12	1/8-1/2	IM7	Split	EVA	8+Tip
AH70MHS	Spinning	7'0"-1	MH	F	8-14	3/8-3/4	IM7	Split	EVA	8+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material

MCS
Magnetic Control System

SPEED GEARS

COMBAT GRIP

6 Bearing System

5 Bearing System

SPEED GEARS

MCS
Magnetic Control System

SPEED GEARS

COMBAT GRIP

SKELETAL SPEED ROTOR

6 Bearing System

MR. CRAPPIE®

AIN'T NO DOUBT YOU WILL LIMIT OUT

WALLY MARSHALL APPROVED!



Mr. Crappie® Slab Shaker® Spinning Reels

- 2 bearing system
- Graphite body, rotor, and spool
- Pre-spooled with premium 6 lb. Mr. Crappie mono

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
MCS50	2	5.1:1	22"	100/4	4.6	R/L
MCS75	2	5.1:1	23"	120/4	4.8	R/L
MCS100	2	4.8:1	24"	150/6	6.1	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Mr. Crappie Slab Shaker Jig/Troll Reels

- Metal frame
- SD1 model features adjustable star drag
- Anti-reverse lever
- Pre-spooled with 6 lb. Mr. Crappie mono

MODEL	GEAR RATIO	MONO CAP.	WT.(OZ.)	RETRIEVE
SS1	3.6:1	90/6	3.2	Right
SD1	3.6:1	90/6	3.6	Right

Mono line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Mr. Crappie Solo™ Jigging Reel

- 2 bearing system
- Graphite body and spool
- Reel weight without line - 3oz.
- Multi-disc drag with click function
- Pre-spooled with 6 lbs. Mr.Crappie mono

MODEL: S01



Mr. Crappie Jigging Reel

- 2 bearing system
- Polycarbonate body and spool
- Adjustable star drag tension adjustment
- Pre-spooled with 6 lbs. Mr.Crappie mono

MODEL: MC1

Mr. Crappie Slab Shaker Spincast

- Ball bearing drive system
- Stainless Steel nose cone and spool
- Drag system with easy adjust drag dial
- Selective anti-reverse switch (Underspin only)
- Adjustable for right or left hand retrieve
- Pre-spooled with 6 lbs. Mr.Crappie mono

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	WT.(OZ.)	RETRIEVE
MSC1	1	4.3:1	12"	70/6	4.9	R/L
MUS1	1	4.3:1	12"	70/6	4.9	R/L

RPT = Recovery per turn | Mono line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

TECHNIQUE SPECIFIC ACTIONS



Mr. Crappie® Slab Shaker® Jig/Troll Spinning Combo

REEL FEATURES:

- 2 bearing system
- Graphite body and rotor
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- IM6 2-piece graphite blank with rod length indicator
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	REEL SIZE	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
MC7510G	10'0"-2	L	Fast	75	120/4	5.1:1	23"	R/L
MC7512G	12'0"-2	L	Fast	75	120/4	5.1:1	23"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left

IM6



Mr. Crappie Slab Daddy® Jig/Troll Spinning Combo

REEL FEATURES:

- 2 bearing system
- Graphite body and spool
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- 2-piece fiberglass construction blank with rod length indicator
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	REEL SIZE	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SDS759-2	9'0"-2	L	Fast	75	120/4	5.1:1	23"	R/L
SDS7510-2	10'0"-2	L	Fast	75	120/4	5.1:1	23"	R/L
SDS7512-2	12'0"-2	L	Fast	75	120/4	5.1:1	23"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left

Mr. Crappie Slab Shaker Spinning Combo

REEL FEATURES:

- 2 bearing system
- Graphite body and rotor
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- IM6 graphite blank
- Stainless steel guides and inserts
- Graphite reel seat
- EVA split grip handle

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	REEL SIZE	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SS5046-2	4'6"-2	L	Fast	50	2-8	1/16-1/4	100/4	5.1:1	22"	R/L
SS7552-2	5'2"-2	L	Fast	75	2-8	1/16-1/4	120/4	5.1:1	23"	R/L
SS7556-2	5'6"-2	L	Fast	75	2-8	1/16-1/4	120/4	5.1:1	23"	R/L
SS7560-2	6'0"-2	L	Fast	75	2-8	1/16-1/4	120/4	5.1:1	23"	R/L
SS7566-2	6'6"-2	L	Fast	75	2-8	1/16-1/4	120/4	5.1:1	23"	R/L
SS7570-2	7'0"-2	L	Fast	75	2-8	1/16-1/4	120/4	5.1:1	23"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left

IM6



Mr. Crappie Slab Daddy Jig/Troll Crappie Combo

REEL FEATURES:

- Plated metal frame
- Anti-reverse lever
- Audible bait clicker/spool tension adjustment control
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- 2-piece fiberglass construction blank with rod length indicator
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE CAP.	GEAR RATIO	RETRIEVE
SDC10-2	10'-2	L	Light	90/6	3.6:1	Right
SDC12-2	12'-2	L	Light	90/6	3.6:1	Right

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left



MR. CRAPPIE

COMBOS



Mr. Crappie® Slab Daddy® Solo™ Jigging Combo

REEL FEATURES:

- 2 bearing system
- Graphite body and spool
- Multi-disc drag with click function
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- Fiberglass construction blank with rod length indicator
- Stainless steel guides and aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RETRIEVE	
SST9-2	9'-2	L	Fast	2-8	1/16-1/4	110/6	1.0:1	Right	
SST10-2	10'-2	L	Fast	2-8	1/16-1/4	110/6	1.0:1	Right	
SST12-2	12'-2	L	Fast	2-8	1/16-1/4	110/6	1.0:1	Right	

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left



Mr. Crappie Slab Daddy Jiggin' Combo

REEL FEATURES:

- 2 bearing system
- Polycarbonate body and spool
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- 2-piece fiberglass construction blank with rod length indicator
- Stainless steel guides and aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SDJ9-2	9'-2	L	Fast	2-8	1/16-1/4	110/6	1.0:1	12"	Right

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left



Mr. Crappie Slab Daddy Jig/Troll Underspin Combo

REEL FEATURES:

- Ball bearing drive system
- Stainless steel nose cone and spool
- Drag system with easy adjust drag dial
- Select on/off anti-reverse
- Pre-spooled with Mr. Crappie mono

ROD FEATURES:

- 2-piece fiberglass construction blank with rod length indicator
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with aluminum hoods
- EVA full length grips
- Stainless steel hook keepers

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SDU9-2	9'-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L
SDU10-2	10'-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L
SDU12-2	12'-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left



Mr. Crappie Slab Shaker® Spincast & Underspin Combos

REEL FEATURES:

- Ball bearing drive
- Stainless steel nose cone, graphite rear cone
- On/off anti-reverse (Underspin only)
- Drag system with easy adjust drag dial
- Pre-spooled with 6 lb. Mr. Crappie mono

ROD FEATURES:

- 2-piece fiberglass construction blank
- Stainless steel guides and inserts
- Graphite reel seat
- EVA full length grips

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	RETRIEVE
SC46L	4'6"-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L
SC56L	5'6"-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L
SCU46L*	4'6"-2	L	Fast	2-8	1/16-1/4	70/6	4.3:1	12"	R/L

H = Heavy, MH = Medium Heavy, M = Medium, L = Light, UL = Ultra Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand | R = Right, L = Left | * = Underspin reel



Mr. Crappie Monofilament Line

- Field tested and approved by Wally Marshall
- Designed specifically for small reel usage
- Available in Camo, Clear, Hi-Vis
- Extreme abrasion resistant formula
- Low memory

MODEL	COLOR	LB TEST	DIA (IN.)	YD.
500 YD. Spool				
MC4FSCL	Clear	4	.008	500
MC6FSCL	Clear	6	.009	500
MC8FSCL	Clear	8	.010	500
MC4FSHV	Hi-Vis	4	.008	500
MC6FSHV	Hi-Vis	6	.009	500
MC8FSHV	Hi-Vis	8	.010	500
MC4FSCM	Camo	4	.008	500
MC6FSCM	Camo	6	.009	500
MC8FSCM	Camo	8	.010	500
Mega Spool				
MC4CL	Clear	4	.008	2000
MC6CL	Clear	6	.009	1500
MC8CL	Clear	8	.010	1200
MC4HV	Hi-Vis	4	.008	2000
MC6HV	Hi-Vis	6	.009	1500
MC8HV	Hi-Vis	8	.010	1200
MC4CM	Camo	4	.008	2000
MC6CM	Camo	6	.009	1500
MC8CM	Camo	8	.010	1200





Mr. Crappie® Custom RRS Graphite Series

- Premium high modulus 2-piece graphite blank
- Stainless steel guides with stainless steel inserts
- Graphite rear reel seat for jigging
- EVA foam handle
- Stainless steel hook keeper

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
Jigging								
CGR10L-2	10'-2	L	Fast	2-8	1/16-1/4	Graphite	Full	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast



Mr. Crappie Custom Troller Graphite Series

- Premium high modulus multi-piece graphite blank with rod length indicator
- Stainless steel guides with stainless steel inserts
- Graphite reel seat with metal hoods
- Spare tips available
- EVA foam handle
- Stainless steel hook keeper

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
Trolling								
CG9L-2	9'-2	L	Fast	2-10	1/64-1/4	Graphite	Full	EVA
CG10L-2	10'-2	L	Fast	2-10	1/64-1/4	Graphite	Full	EVA
CG12L-2	12'-2	L	Fast	2-10	1/64-1/4	Graphite	Full	EVA
CG14L-3	14'-3	L	Fast	2-10	1/64-1/4	Graphite	Full	EVA
CG16L-3	16'-3	L	Fast	2-10	1/64-1/4	Graphite	Full	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast



Mr. Crappie Slab Shaker® Graphite Series

- Premium multi-piece graphite blank with rod length indicator
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat with metal hoods
- Spare tips available
- EVA foam handle
- Stainless steel hook keeper

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
MC10PL2G	10'-2	ML	Fast	2-8	1/16-1/4	Graphite	Full	EVA
MC12PL2G	12'-2	ML	Fast	2-8	1/16-1/4	Graphite	Full	EVA
MC14PL3G	14'-3	ML	Fast	2-8	1/16-1/4	Graphite	Full	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast



Mr. Crappie Slab Daddy® Fiberglass Series

- Premium 2-piece fiberglass blank
- Stainless steel guides with aluminum oxide inserts
- Graphite reel seat
- EVA foam handle
- Stainless steel hook keeper
- Rod length indicator

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
SD9L-2	9'-2	L	Fast	2-8	1/16-1/4	Fiberglass	Full	EVA
SD10L-2	10'-2	L	Fast	2-8	1/16-1/4	Fiberglass	Full	EVA
SD12L-2	12'-2	L	Fast	2-8	1/16-1/4	Fiberglass	Full	EVA
SD14L-2	14'-2	L	Fast	2-8	1/16-1/4	Fiberglass	Full	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast



Mr. Crappie Slab Daddy Telescopic Series

- Premium telescopic fiberglass blank
- Convenient line retainer
- EVA foam handle
- Tether tip-cap for storage

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
Telescopic								
SD9TL	9'-3	L	Fast	2-8	1/16-1/4	Graphite	Full	EVA
SD10TL	10'-3	L	Fast	2-8	1/16-1/4	Graphite	Full	EVA
SD12TL	12'-4	L	Fast	2-8	1/16-1/4	Graphite	Full	EVA
SD14TL	14'-4	L	Fast	2-8	1/16-1/4	Graphite	Full	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast



Mr. Crappie Slab Shaker Series

- Premium 2-piece fiberglass blank
- Stainless steel guides and inserts
- Graphite reel seat
- EVA full length handle on casting models
- EVA split grip handle on spinning models

MODEL	LGTH/PCS	POWER	ACTION	LINE RATING(LBS.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MATERIAL
Casting								
MCC56-2	5'6"-2	L	Fast	2-8	1/16-1/4	Fiberglass	Full	EVA
Spinning								
MCS46-2	4'6"-2	L	Fast	2-8	1/16-1/4	Fiberglass	Split	EVA
MCS56-2	5'6"-2	L	Fast	2-8	1/16-1/4	Fiberglass	Split	EVA
MCS60-2	6'0"-2	L	Fast	2-8	1/16-1/4	Fiberglass	Split	EVA
MCS66-2	6'6"-2	L	Fast	2-8	1/16-1/4	Fiberglass	Split	EVA

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

LEW'S ACCESSORIES

CUSTOM FIT YOUR GEAR

We know your time on the water is valuable, and we want to maximize it. From water-resistant boat bags, to custom handle knobs for quick identification, all of our products are built with speed in mind.



Speed Boat Bags

- Heavy-duty water-resistant PVC tarpaulin
- Molded waterproof bottom
- 2 inside pockets
- Large mesh zippered inside pocket, EVA foam handles
- 24" bag has a removable padded shoulder strap

MODEL	LENGTH	BAG MATERIAL	DIMENSIONS	COLOR
BBL-Y-18	18"	PVC tarpaulin	18" L x 12" H x 12" W	Yellow
B241212	24"	PVC tarpaulin	24" L x 12" H x 12" W	Yellow



Tournament Bag

- Heavy-duty, leak free PVC construction
- Strong handle with padded grips
- Heavy duty zippered top
- Black color for calming fish during transport
- Oversized for big catch capacity

MODEL	BAG MATERIAL	COLOR
LTB1	PVC	Black



Speed Beam Culling System

- T-shaped handle
- Corrosion resistant aluminum handle and beam

MODEL	HANDLE/BEAM MATERIAL
LSB2	Aluminum



David Fritts Get'R Back™ Lure Retriever

- 28' retrieving cord
- Rubber coating

MODEL	WEIGHT (OZ.)
LLR1	8.9



Floating Key Chain

- Hi-visibility yellow
- Floats 1 or 2 keys

MODEL	MATERIAL
LFKCI	Foam



Custom Handle Knobs

Customize your reel by choosing from a variety of shapes and colors. Package includes, Custom knob and one black knob cap. Knobs are compatible with all Lew's baitcast and spinning reels.

MODEL	PER PACK	MATERIAL	COLOR
Paddle			
CSPKCC	1	Winn	Chartreuse
CSPKCO	1	Winn	Orange
CSPKCCC	1	Winn	Charcoal
CSPKCB	1	Winn	Black
CSPKCN	1	Winn	Blue
CSPKCR	1	Winn	Red
CSCKB	2	Combat Grip*	Black
Oversize Round			
CSORKCC	1	Winn	Chartreuse
CSORKCO	1	Winn	Orange
CSORKCCC	1	Winn	Charcoal
CSORKCB	1	Winn	Black
CSORKCN	1	Winn	Blue
CSORKCR	1	Winn	Red
Standard Round			
CSSRKCC	1	Winn	Chartreuse
CSSRKCO	1	Winn	Orange
CSSRKCCC	1	Winn	Charcoal
CSSRKCB	1	Winn	Black
CSSRKCN	1	Winn	Blue
CSSRKCR	1	Winn	Red
Paddle EVA/Cork			
CSPKCEC	1	EVA/Cork	Black

*Does not include caps

Speed Dial®

Easily identify the line type and pound test on the reel. Fits Lew's low profile baitcast reels

MODEL	LINE TYPES	LINE RANGE
CSSDBGS	Mono, Fluoro, Braid	8-80lbs.



Speed Covers

- Hook and loop closure
- Instant protection
- Thick 2mm high density neoprene

MODEL	FITS	COLOR
Baitcast		
LSCBC1	Baitcaster	Black
LSCBC3	300/Wide	Black
Spinning		
LSCBS1	100/200	Black
LSCBS2	300/400	Black



Custom Handle Kits

Compatible with all Lew's® baitcast reels and fit most reels with 8mm shaft and swept star drag. Kit includes: 95mm handle, knob cap, handle washer, handle nut, handle nut retainer, and handle retainer screw.

MODEL	HANDLE MATERIAL	KNOB MATERIAL	KNOB COLOR
Round Knobs - Carbon			
CSCHB	Carbon	Winn	Black
CSCHCC	Carbon	Winn	Charcoal
CSCHC	Carbon	Winn	Chartreuse
CSCHN	Carbon	Winn	Blue
Round Knobs - Aluminum			
CSBAHB	Aluminum	Winn	Black
CSBAHCC	Aluminum	Winn	Charcoal
CSBAHC	Aluminum	Winn	Chartreuse
CSBAHN	Aluminum	Winn	Blue
CSBAHO	Aluminum	Winn	Orange
CSBAHOR	Aluminum	Winn	Red
Paddle Knobs			
CFH95B	Carbon	Rubber	Black
AH95B	Aluminum	Rubber	Black
Oversized Round			
LDP	Aluminum	EVA	Black



Speed Socks

- Hook and loop strap for storage
- High density weave
- Tapered tip for easy rod locker storage
- Elastic band secures sock to reel
- Top loop for hanging storage

MODEL	LENGTH	LENGTH	COLOR
Casting			
SSCC1	Casting	6'6"-7'6"	Chartreuse
SSCC2	Casting	7'3"-7'11"	Chartreuse
SSOC1	Casting	6'6"-7'6"	Orange
SSOC2	Casting	7'3"-7'11"	Orange
SSYC1	Casting	6'6"-7'6"	Yellow
SSYC2	Casting	7'3"-7'11"	Yellow
SSBC1	Casting	6'6"-7'6"	Black
SSBC2	Casting	7'3"-7'11"	Black
Spinning			
SSCS1	Spinning	6'6"-7'2"	Chartreuse
SSOS1	Spinning	6'6"-7'2"	Orange
SSYS1	Spinning	6'6"-7'2"	Yellow
SSBS1	Spinning	6'6"-7'2"	Black

KEEP YOUR GEAR WORKING AT PEAK PERFORMANCE

LEW'S SPEED LUBE

Super Duty® Casting Reel Grease

Custom blended, temperature resistant, formulation with special extreme pressure additives engineered to deliver dependable lubrication for precision gears in casting reels.

MODEL	SIZE	INGREDIENTS	APPLICATION
SDCRG1	1 fl. oz.	Custom Blend Grease	Drive Gear

APPLICATION:




Apply grease to one quarter of the drive gear located under the lube port while gear turns

Super Duty Spinning Reel Grease

All-purpose grease for spinning reels, fortified with anti-wear and corrosion inhibitors. Allows gears to run smoother, quieter and last longer.

MODEL	SIZE	INGREDIENTS	APPLICATION
SDSRG1	1 fl. oz.	Custom Blend Grease	Gear Teeth

APPLICATION:



Apply to all gear teeth and friction surfaces

Speed Cast® Line Conditioner

Line treatment spray that cleans line and rod guides, provides UV protection, and environmentally friendly water based formula. Special additives coat and protect line and guides to minimize friction for longer casting distance.

MODEL	SIZE	INGREDIENTS	APPLICATION
SCST6	6 fl. oz.	Water Based Formula	Line & Guides



Speed Cleanz® Reel Cleaner

Cleans and degreases fishing reels. Gentle solvent cleaner without harsh evaporates and will not attack common plastics.

MODEL	SIZE	INGREDIENTS	APPLICATION
SSC6	6 fl. oz.	High Quality Solvent	Reels



Super Duty Reel Oil

SuperDuty Reel Oil is a multi-purpose lubricant for reel bearings, bushings and shafts. Seals out moisture and deters corrosion.

MODEL	SIZE	INGREDIENTS	APPLICATION
SDRO1	1 fl. oz.	Petroleum & Synthetic Oils	Multi-Purpose

BAITCAST REEL APPLICATION:



Apply to worm gear



Apply to line guide pipe



Apply 3 drops to one-way bearing

SPINNING REEL APPLICATION:



Apply to rotor head bearing and main shaft



Apply to gear side cover bearing




HyperSpeed™ Bearing Lubricant

Custom formulated from the highest quality synthetic base oils - HyperSpeed Lube, allows maximum performance of baitcast spool mainshaft bearings, designed specifically for high speed baitcast reels.

MODEL	SIZE	INGREDIENTS	APPLICATION
HSBL1	1 fl. oz.	Synthetic Base Oils	Baitcast Mainshaft Bearings


BAITCAST REEL APPLICATION:



Apply to cast control cap bearing behind Speed Dial® or tension cap.



Apply to spool main shaft bearing



Apply to palm side cover bearing



Speed Brake Centrifugal Brake Cleaner

Perfect combination of cleaning and lubrication for precision centrifugal braking systems. Leaves no sticky or tacky residues.

MODEL	SIZE	INGREDIENTS	APPLICATION
SBC1	1 fl. oz.	Oils & Synthetic Esters	Centrifugal Brake

APPLICATION:



Apply one drop spread evenly over face of brake ring



ACC. & LUBE

SPEED LUBES


Mach[®]

2022 PRODUCT GUIDE

MACH 1
MACH 2

CRUSH

SMASH

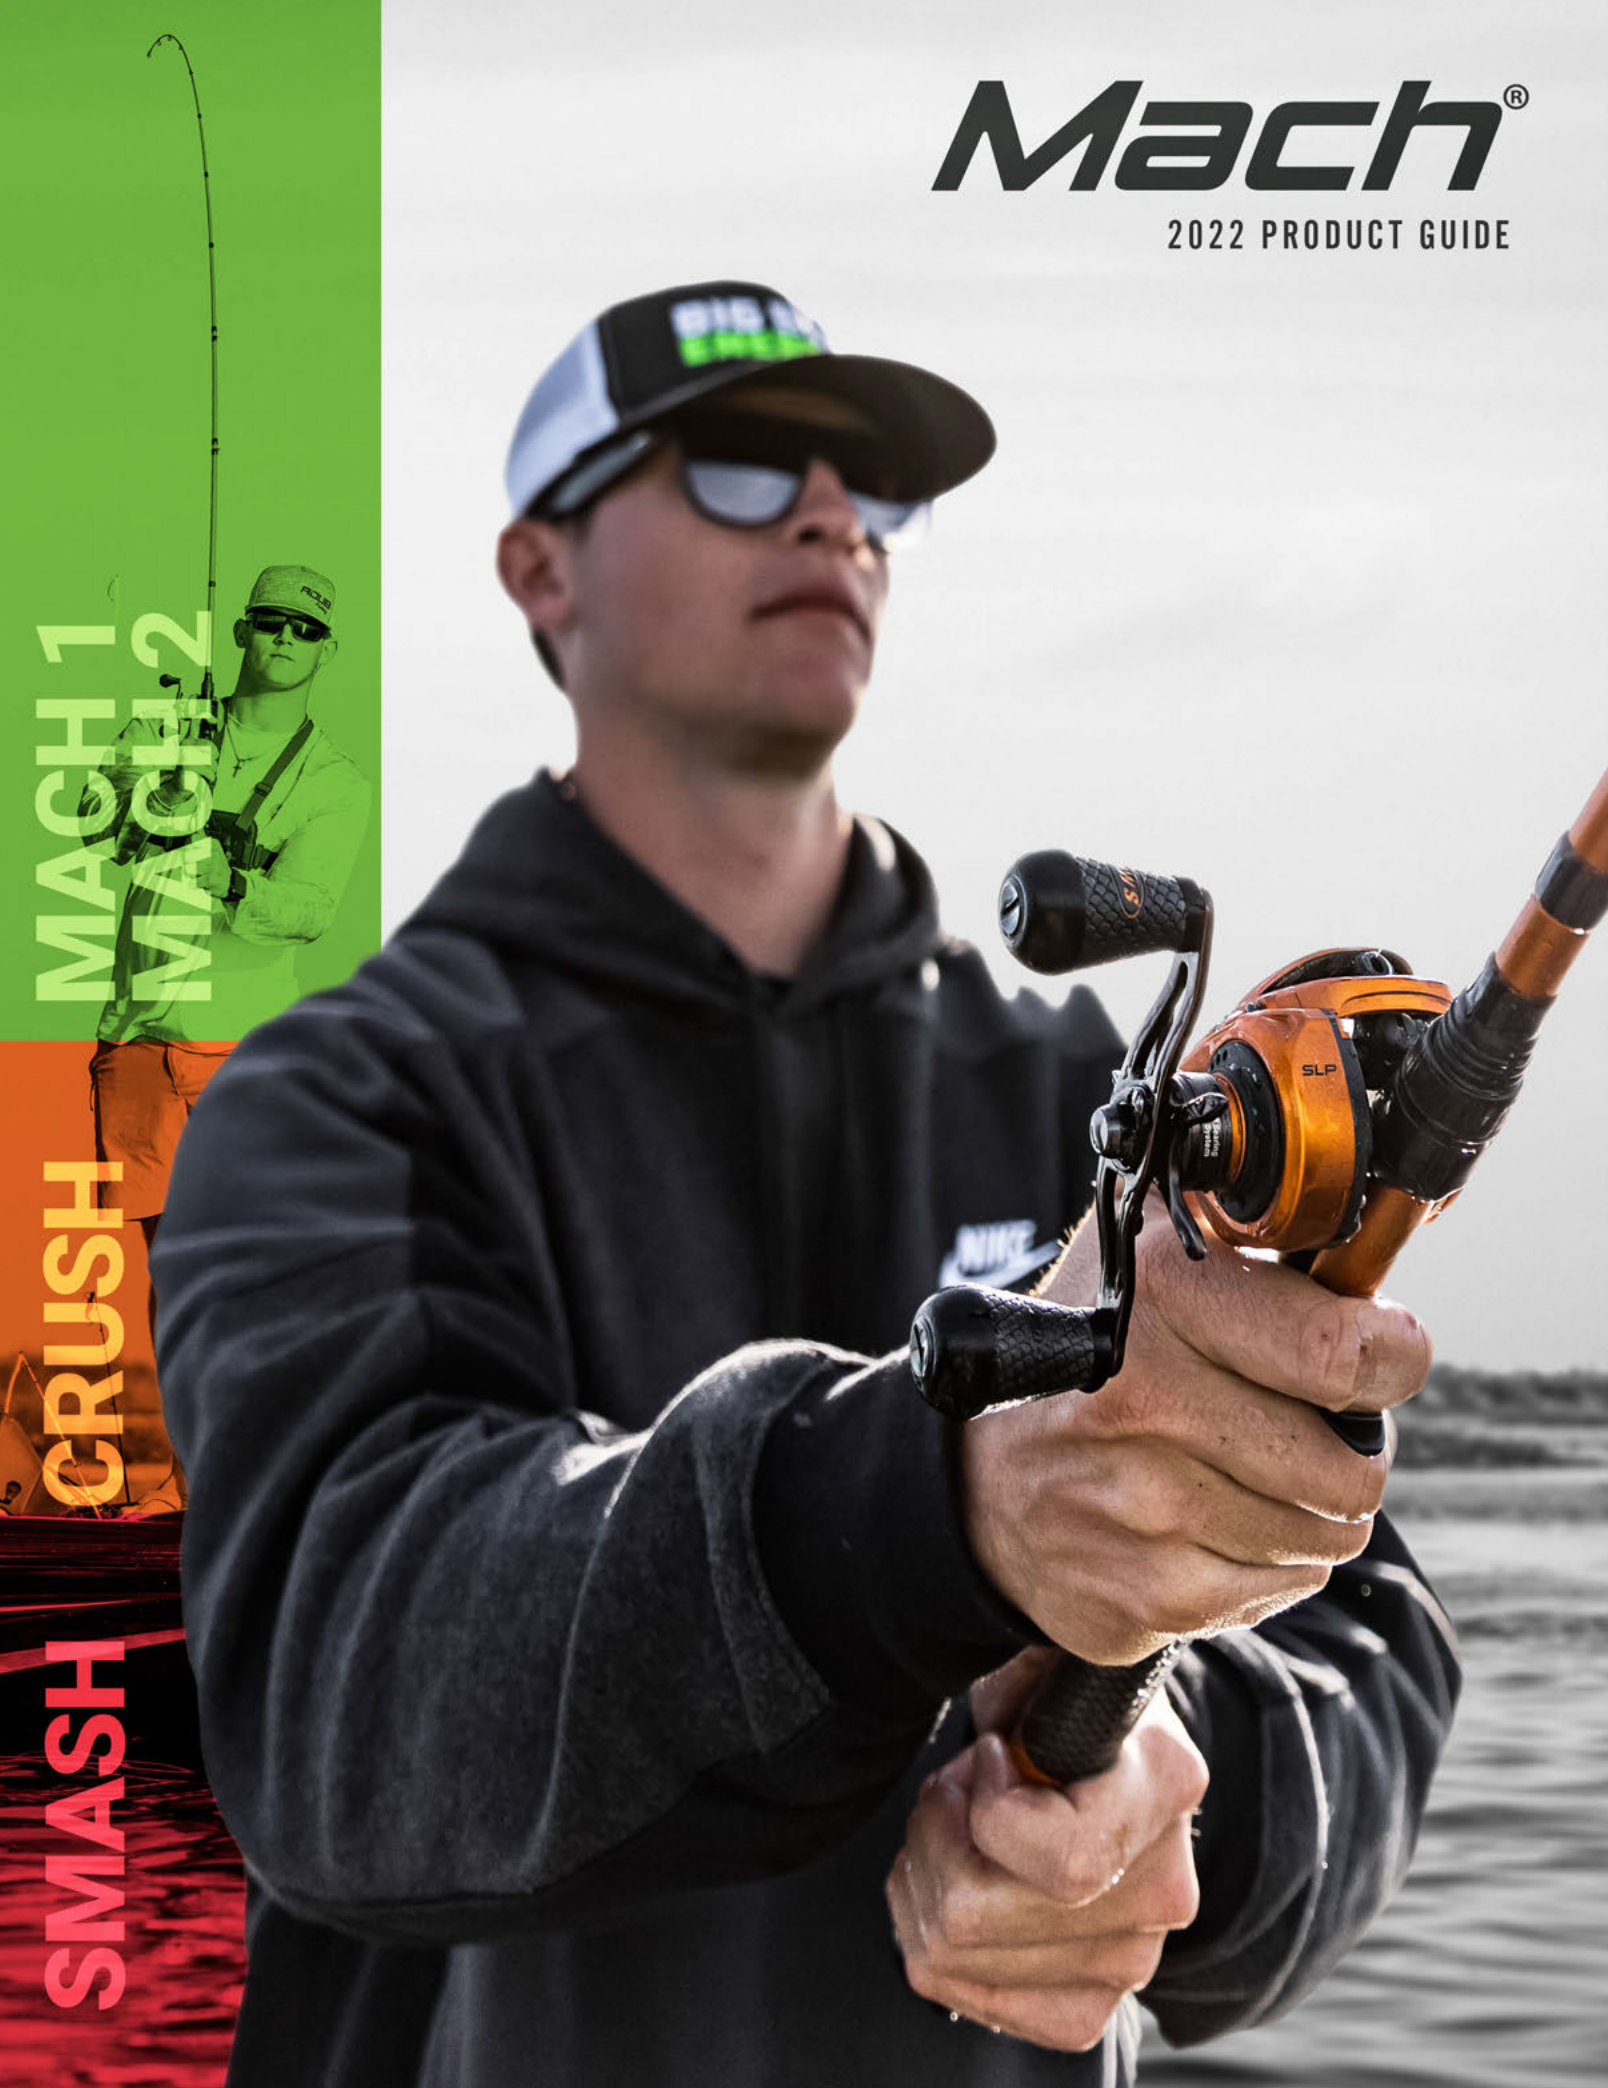

Mach[®]
BUILT BY LEW'S



CRUSH
MACH CRUSH SERIES

MACH
MACH 1 & 2 SERIES

SMASH
MACH SMASH SERIES
NEW COMBO MODELS FOR 2022

MACH CRUSH SERIES

Mach

IT'S
TIME
TO
CRUSH
THEM



FULL CONTACT REEL SEAT

New Lew's® proprietary Full Contact reel seats with increased blank contact

CT-1™ COMFORTTOUCH GRIPS

The grip fully encompasses the entire reel foot, providing the most comfortable grip ever produced on a spinning rod



Mach® Crush SLP Combo

REEL FEATURES:

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame with graphite sideplates
- Multi Setting Brake system (MSB)
- Zirconia line guide
- Carbon fiber drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- 95mm bowed anodized aluminum handle with Winn® Dri-Tac knobs
- Anodized aluminum 32mm spool

ROD FEATURES:

- Premium IM8 graphite blank with Nano technology
- Stainless steel guides with titanium oxide inserts
- Full Contact reel seats for increased blank contact
- Full-length Winn® Dri-Tac handle
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MCR1SHA70MH	7'0"-1	MH	Fast	10-20	3/16-3/4	110/12	7.5:1	30"	20 lb.	Right
MCR1SHLA70MH	7'0"-1	MH	Fast	10-20	3/16-3/4	110/12	7.5:1	30"	20 lb.	Left
MCR1SHA73H	7'3"-1	H	Fast	14-65	3/8-1 1/2	110/12	7.5:1	30"	20 lb.	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® Crush SLP Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MCR1SHA	9+1	7.5:1	30"	110/12	110/50	7.3	20 lb.	Right
MCR1SHLA	9+1	7.5:1	30"	110/12	110/50	7.3	20 lb.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



Mach® Crush Spinning Combo

REEL FEATURES:

- 11 Bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- Aluminum frame with aluminum sideplate
- C40 carbon skeletal rotor
- Sealed carbon multi disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- Aluminum handle with Winn® Dri-Tac knob
- Braid ready, knurled double anodized aluminum spool

ROD FEATURES:

- Premium IM8 graphite blank with Nano technology
- Stainless steel guides with titanium oxide inserts
- CT-1™ ComfortTouch Winn® Dri-Tac handle
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MCR20A69MLFS	6'9"-1	ML	Fast	4-12	1/16-5/16	120/8	6.2:1	31"	14 lb.	R/L
MCR30A70MFS	7'0"-1	M	Fast	6-12	3/16-5/8	180/10	6.2:1	32"	14 lb.	R/L

ML = Medium Light, M = Medium, L = Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left

Mach® Crush Spinning Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MCR200A	10+1	6.2:1	31"	120/8	180/10	8.6	14 lb.	R/L
MCR300A	10+1	6.2:1	32"	180/10	250/15	8.9	14 lb.	R/L
MCR400A	10+1	6.2:1	35"	190/12	300/20	9.8	18 lb.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



Mach® 2 SLP Combo

REEL FEATURES:

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame with graphite sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- 95mm bowed anodized aluminum handle with Winn® Dri-Tac knobs
- Double anodized aluminum 32mm spool

ROD FEATURES:

- Premium IM8 graphite blank
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Stainless steel guides with aluminum oxide inserts
- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MH2SHA70MH	7'0"-1	MH	Fast	10-20	3/16-3/4	110/12	7.5:1	30"	15 lb.	Right
MH2SHLA70MH	7'0"-1	MH	Fast	10-20	3/16-3/4	110/12	7.5:1	30"	15 lb.	Left
MH2SHA73MHCB	7'3"-1	MH	Fast	10-25	1/2-1 3/8	110/12	7.5:1	30"	15 lb.	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 2 SLP Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MH2SHA	9+1	7.5:1	30"	110/12	110/50	7.2	15 lb.	Right
MH2SHLA	9+1	7.5:1	30"	110/12	110/50	7.2	15 lb.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 2 Spinning Combo

REEL FEATURES:

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- Aluminum frame with aluminum sideplate
- C40 carbon skeletal rotor
- DuraMax™ drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- Aluminum handle with Winn® Dri-Tac knob
- Braid ready, knurled double anodized aluminum spool

ROD FEATURES:

- Premium IM8 graphite blank
- Lew's exclusive SoftTouch graphite skeletal reel seat
- Stainless steel guides with aluminum oxide inserts
- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
M2A3069MFS	6'9"-1	M	Fast	6-14	1/8-1/2	180/10	6.2:1	32"	14 lb.	R/L

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 2 Spinning Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MH2-100A	9+1	5.2:1	30"	120/6	150/8	6.9	8 lb.	R/L
MH2-200A	9+1	6.2:1	31"	120/8	180/10	8.9	14 lb.	R/L
MH2-300A	9+1	6.2:1	32"	180/10	250/15	9.0	14 lb.	R/L
MH2-400A	9+1	6.2:1	35"	190/12	300/20	9.9	18 lb.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left



WHEN YOU'RE READY TO STANDOUT AMONG THE REST



Mach

MACH 2 SERIES

Mach® 1 SLP Combo

REEL FEATURES:

- 8 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame with graphite sideplates
- Multi Setting Brake System (MSB)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- High strength solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- 95mm bowed anodized aluminum handle with Lew's Combat Grip®
- Double anodized aluminum 32mm spool

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MH1SHA610MH	6'10"-1	MH	Fast	10-20	3/8-3/4	140/12	7.5:1	30"	15 lb.	Right
MH1SHLA610MH	6'10"-1	MH	Fast	10-20	3/8-3/4	140/12	7.5:1	30"	15 lb.	Left
MH1SHA72MH	7'2"-1	MH	Fast	12-50	3/16-1	140/12	7.5:1	30"	15 lb.	Right

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 1 SLP Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MH1SHA	7+1	7.5:1	30"	140/12	140/50	7.3	15 lb.	Right
MH1SHLA	7+1	7.5:1	30"	140/12	140/50	7.3	15 lb.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 1 Spinning Combo

REEL FEATURES:

- 10 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- C40 carbon skeletal rotor
- Oversized multi-disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- Aluminum handle with Lew's Combat Grip®
- Braid ready, knurled double anodized aluminum spool

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
M1A1070LFS	7'0"-1	L	Fast	4-8	1/32-1/4	120/6	6.2:1	30"	13 lb.	R/L
M1A2069MLFS	6'9"-1	ML	Fast	4-10	1/16-5/16	120/8	6.2:1	31"	13 lb.	R/L
M1A3069MFS	6'9"-1	M	Fast	6-14	1/8-1/2	145/10	6.2:1	32"	17 lb.	R/L
M1A3066MMS-2	6'6"-2	M	Moderate	4-12	1/8-1/2	145/10	6.2:1	32"	17 lb.	R/L
M13070MMS-2	7'0"-2	M	Moderate	4-12	1/8-1/2	145/10	6.2:1	32"	17 lb.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® 1 Spinning Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MH100A	9+1	6.2:1	30"	120/6	150/8	7.8	13 lb.	R/L
MH200A	9+1	6.2:1	31"	120/8	180/10	8.1	13 lb.	R/L
MH300A	9+1	6.2:1	32"	145/10	250/15	9.0	17 lb.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left

ROD FEATURES:

- Premium IM8 graphite blank
- Lew's exclusive graphite skeletal reel seat
- Stainless steel guides with aluminum oxide inserts
- Split grip Winn® Dri-Tac grip with EVA butt
- Patented "No Foul" hook keeper



ROD FEATURES:

- Premium IM8 graphite blank
- Lew's exclusive graphite skeletal reel seat
- Stainless steel guides with aluminum oxide inserts
- Split grip Winn® Dri-Tac grip with EVA butt
- Patented "No Foul" hook keeper



COMBAT GRIP

IM8

WINN

SPEED GEARS

Bearing System

MSB Multi-Setting Brake

8

9

10

C40 CARBON

SKELETAL SPEED ROTOR

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

10

OUR
PRODUCT
DESIGN
STARTS
AT
THE
HEART

AND
ENDS
IN
THE
HANDS



Mach®

MACH 1 SERIES

WAC

MACH SMASH SERIES

SMASH

SMASH

SMASH

Mach



BUILT TO SMASH ANYTHING THAT STANDS IN THE WAY

Mach® Smash SLP Combo

REEL FEATURES:

- 8 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- One-piece graphite frame with graphite sideplates
- Externally adjustable Magnetic Control System (MCS)
- Zirconia line guide
- Rulon drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Combat Grip® thumb bar
- High strength solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- 95mm bowed anodized aluminum handle with Combat Grip® paddle knobs
- Anodized aluminum 32mm spool

ROD FEATURES:

- Premium IM6 graphite blank
- Lew's exclusive graphite skeletal reel seat
- Stainless steel guides with stainless steel inserts
- Split grip Winn® Dri-Tac grip with EVA butt
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
MHS1SH610MH	6'10"-1	MH	Fast	10-20	3/8-3/4	110/12	7.5:1	30"	15 lb.	Right
MHS1SHL610MH	6'10"-1	MH	Fast	10-20	3/8-3/4	110/12	7.5:1	30"	15 lb.	Left
MHS1SH72M	7'2"-1	M	Fast	10-20	1/8-1/2	110/12	7.5:1	30"	15 lb.	Right
MHS1SHL72M	7'2"-1	M	Fast	10-20	1/8-1/2	110/12	7.5:1	30"	15 lb.	Left
MHS1SH72MH	7'2"-1	MH	Fast	12-30	1/4-1	110/12	7.5:1	30"	15 lb.	Right
MHS1SHL72MH	7'2"-1	MH	Fast	12-30	1/4-1	110/12	7.5:1	30"	15 lb.	Left

H = Heavy, MH = Medium Heavy, M = Medium | RPT = Recovery per turn | Line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand

Mach® Smash SLP Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MHS1SH	7+1	7.5:1	30"	110/12	110/50	7.0	15 lb.	Right
MHS1SHL	7+1	7.5:1	30"	110/12	110/50	7.0	15 lb.	Left

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand



NEW MODELS FOR 2022

Mach® Smash Spinning Combo

REEL FEATURES:

- 8 bearing system with stainless steel double shielded ball bearings
- Zero Reverse® one-way clutch bearing
- Graphite frame and sideplate
- Skeletal graphite rotor
- Oversized multi disc drag system
- Speed Lube® for exceptional smoothness and performance in all weather conditions
- Solid brass Speed Gears®, cut on precision Hamai CNC gear hobbing machines
- Aluminum handle with Combat Grip® paddle knob

ROD FEATURES:

- Premium IM6 graphite blank
- Lew's exclusive graphite skeletal reel seat
- Stainless steel guides with stainless steel inserts
- Split grip Winn® Dri-Tac grips with EVA butt
- Patented "No Foul" hook keeper

MODEL	LGTH/PCS	ROD POWER	ROD ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	LINE CAP.	GEAR RATIO	RPT	MAX DRAG	RETRIEVE
NEW MHS10510LS-2	5'10"-2	L	Fast	4-10	1/16-1/4	120/6	6.2:1	30"	17 lbs.	R/L
NEW MHS2060MLS	6'0"-1	ML	Fast	6-12	1/8-3/8	120/8	6.2:1	31"	17 lbs.	R/L
NEW MHS2066MLS-2	6'6"-2	ML	Fast	6-12	1/8-3/8	120/8	6.2:1	32"	17 lbs.	R/L
MHS3066MS	6'6"-1	M	Fast	4-12	1/8-1/2	145/10	6.2:1	32"	17 lbs.	R/L
MHS3070MS	7'0"-1	M	Fast	4-12	1/8-1/2	145/10	6.2:1	32"	17 lbs.	R/L
NEW MHS3072MHS	7'2"-1	MH	Fast	8-30	3/16-3/4	120/10	6.2:1	32"	17 lbs.	R/L

H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light | RPT = Recovery per turn | Line capacity = yds/lbs. |

Mach® Smash Spinning Series

MODEL	BEARINGS	GEAR RATIO	RPT	MONO CAP.	BRAID CAP.	WT.(OZ.)	MAX DRAG	RETRIEVE
MHS200 OR C	7+1	6.2:1	31"	120/8	180/10	8.4	13 lb.	R/L
MHS300 OR C	7+1	6.2:1	32"	145/10	250/15	9.1	17 lb.	R/L

RPT = Recovery per turn | Mono/Braid line capacity = yds/lbs. | Retrieve = Reel Retrieve Hand, R = Right, L = Left | C = Clam Pack



Mach® 2 Series Rods

- Premium IM8 graphite blank
- Stainless steel guides with aluminum oxide inserts
- G Clutch® Handle System with Midas Touch® on casting models
- Lew's exclusive BARE reel seats utilizing G Clutch™ technology on spinning models

- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
M2TWJBR	Topwater/Jerkbait	6'10"-1	MH	MF	8-12	1/8-1/2	IM8	G Clutch	Winn	7+Tip
M2SBR	Spinnerbait	6'10"-1	MH	MF	10-20	1/4-3/4	IM8	G Clutch	Winn	7+Tip
M2APC	All Purpose Casting	7'0"-1	M	MF	10-20	1/8-1/2	IM8	G Clutch	Winn	7+Tip
M2WR	Worm Rod	7'0"-1	MH	F	12-20	3/16-5/8	IM8	G Clutch	Winn	7+Tip
M2JR	Jig Rod	7'2"-1	MH	F	12-25	1/4-1	IM8	G Clutch	Winn	7+Tip
M2SJR	Swimjig/Swimbait	7'3"-1	H	F	14-50	1/2-1	IM8	G Clutch	Winn	7+Tip
M2CBBR	Crankback	7'3"-1	MH	M	10-25	3/8-1/2	IM8	G Clutch	Winn	7+Tip
M2PR	Pitchin	7'4"-1	H	F	15-65	3/16-1 1/2	IM8	G Clutch	Winn	7+Tip
M2CRR	Carolina Rig	7'6"-1	MH	MF	14-30	1/2-1 1/2	IM8	G Clutch	Winn	8+Tip
M2FS	Flipping	7'6"-1	H	F	15-65	3/16-2	IM8	G Clutch	Winn	8+tip
Spinning Rods										
M2NRR	Ned Rig	6'7"-1	ML	F	4-10	1/16-1/4	IM8	Bare	Winn	7+Tip
M2FSR	Finesse Rod	6'9"-1	ML	F	6-10	1/8-3/8	IM8	Bare	Winn	7+Tip
M2APSR	All Purpose	6'9"-1	M	F	6-14	1/8-1/2	IM8	Bare	Winn	7+Tip
M2DSR	Dock Sniper	6'11"-1	M	XF	6-10	1/8-3/8	IM8	Bare	Winn	7+Tip
M2TGR	Tube/Grub	7'0"-1	M	F	6-14	3/16-5/8	IM8	Bare	Winn	7+Tip
M2MSR2	Magnum	7'2"-1	MH	MF	8-30	3/16-3/4	IM8	Bare	Winn	7+Tip
M276MMFS	Open Water	7'6"-1	M	MF	8-15	3/16-1/2	IM8	Bare	Winn	7+Tip
M276MFS	Open Water	7'6"-1	M	F	8-17	3/16-1/2	IM8	Bare	Winn	7+Tip
M276MHFS	Open Water	7'6"-1	MH	F	8-17	1/4-5/8	IM8	Bare	Winn	7+Tip
2-Piece Spinning										
M260MS-2	Multi Purpose	6'0"-2	M	F	4-12	1/8-1/2	IM8	Bare	Winn	7+Tip
M266MS-2	Multi Purpose	6'6"-2	M	F	4-12	1/8-1/2	IM8	Bare	Winn	7+Tip
M270MS-2	Multi Purpose	7'2"-2	M	F	4-12	1/8-1/2	IM8	Bare	Winn	7+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic

Mach® Series Rods

- Premium IM7 graphite blank with Nano construction
- Stainless steel guides with aluminum oxide inserts
- Lew's exclusive SoftTouch graphite skeletal reel seat

- Winn® Dri-Tac split grip handles
- Patented "No Foul" hook keeper

MODEL	TYPE	LGTH/PCS	POWER	ACTION	LINE RATING(LB.)	LURE RATING(OZ.)	BLANK	HANDLE STYLE	HANDLE MAT.	GUIDES
Casting Rods										
MTWJBR	Topwater/Jerkbait	6'8"-1	M	MF	8-12	1/8-1/2	IM7	Split	Winn	8+Tip
MSBR	Spinnerbait	6'10"-1	MH	MF	10-20	1/4-3/4	IM7	Split	Winn	8+Tip
MAPC	All Purpose Casting	7'0"-1	M	MF	10-20	1/8-1/2	IM7	Split	Winn	8+Tip
MWR	Worm Rod	7'0"-1	MH	F	12-20	3/16-5/8	IM7	Split	Winn	8+Tip
MJR	Jig Rod	7'2"-1	MH	F	12-50	1/4-1	IM7	Split	Winn	8+Tip
MCBR	Crankback	7'3"-1	MH	M	10-25	1/2-1 3/8	IM7	Split	Winn	8+Tip
MSJR	Swimjig/Swimbait	7'3"-1	H	F	14-50	1/2-1	IM7	Split	Winn	8+Tip
MPR	Pitching	7'4"-1	H	F	15-65	3/16-1 1/2	IM7	Split	Winn	8+Tip
MCCR	Carolina Rig	7'6"-1	MH	MF	14-30	1/2-1 1/2	IM7	Split	Winn	9+Tip
MFS	Flipping	7'6"-1	H	F	15-65	3/16-2	IM7	Split	Winn	9+Tip
Spinning Rods										
MNRR	Ned Rig	6'7"-1	ML	F	4-10	1/16-1/4	IM7	Split	Winn	8+Tip
MFSR	Finesse Rod	6'9"-1	ML	F	6-10	1/8-3/8	IM7	Split	Winn	8+Tip
MAPSR	All Purpose	7'0"-1	M	F	6-14	3/16-5/8	IM7	Split	Winn	8+Tip
M76MHFS	Open Water	7'6"-1	MH	F	8-17	1/4-5/8	IM7	Split	Winn	7+Tip
2-Piece Spinning										
M60MS-2	Multi Purpose	6'0"-1	M	F	4-12	1/8-1/2	IM7	Split	Winn	8+Tip
M66MS-2	Multi Purpose	6'6"-1	M	F	4-12	1/8-1/2	IM7	Split	Winn	8+Tip
M70MS-2	Multi Purpose	7'0"-1	M	F	4-12	1/8-1/2	IM7	Split	Winn	8+Tip

XH = Extra Heavy, H = Heavy, MH = Medium Heavy, M = Medium, ML = Medium Light, L = Light, UL = Ultra Light | XF = Extra Fast, F = Fast, M = Moderate, MF = Moderate Fast | Handle Mat. = Handle Material | * = Telescopic



POWER & STYLE

MACH ROD SERIES



BARE REEL SEAT

Spinning reel seats features G Clutch technology teamed with Winn Dri-Tac palming material for extreme comfort and direct contact with the rod blank

G CLUTCH® HANDLE SYSTEM WITH MIDAS TOUCH®

Comfortable, lightweight, and ergonomic handles. The innovative design allows direct contact to the blank for ultimate sensitivity while placing the reel closer to the rod for a lower profile and better balance



MACH HATCHPACK
MODEL: LMHP



Mach[®] Tackle Bag & HatchPack

- 600 D polyester w/Honeycomb ripstop polyester panels
- EVA wall construction
- Model: LMHP - 7 compartments
- Model: LMHP - 5 rubber mesh pockets
- LMHPA Dimensions: 20"H x 16"W x 9.25"D
- Model: LMTBA - 5 compartments
- Model: LMTBA - 4 rubber mesh pockets
- LMTB Dimensions: 20"L x 12"H x 11.5"D
- Line spooling grommet
- Plier holder
- Juice Pouch liquid accessory holder
- Sunglasses Holder
- Holds up to 5 3700 style boxes in main compartment
- Includes: 1-13.75" x 8.75" x 2" utility box



Check out the collection of fishing gear & accessories we offer.