



# FLASHING LED SAFETY BAND


## BATTERY REPLACEMENT INSTRUCTIONS

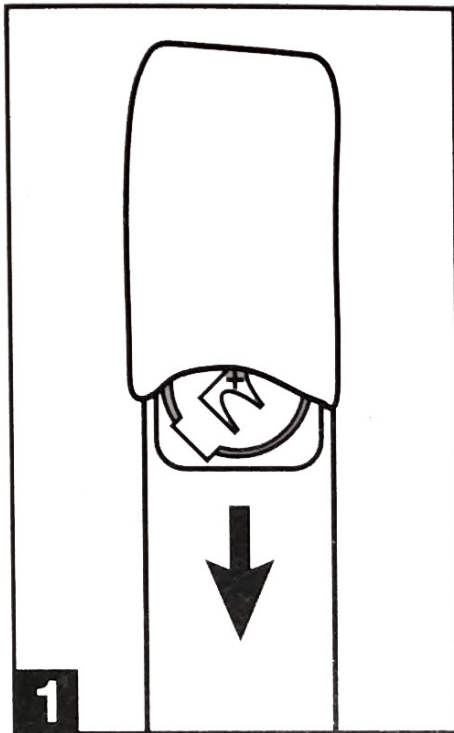


Gently pull battery holder out from beneath the elastic pouch on back.

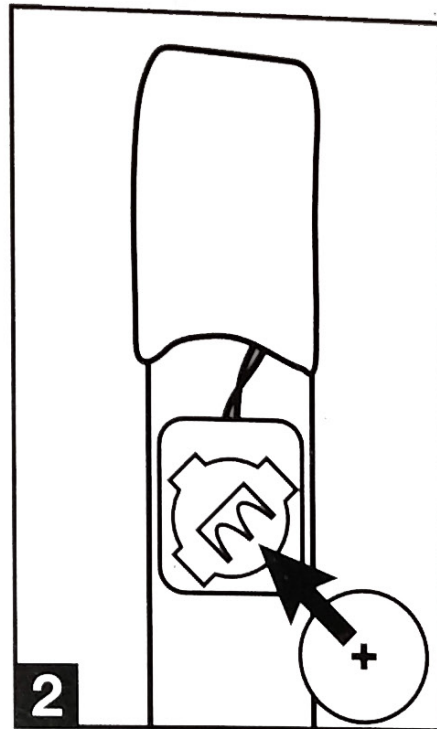

Remove old battery.\* Insert new CR2032 (3V) battery into holder with positive (+) side facing top of holder.

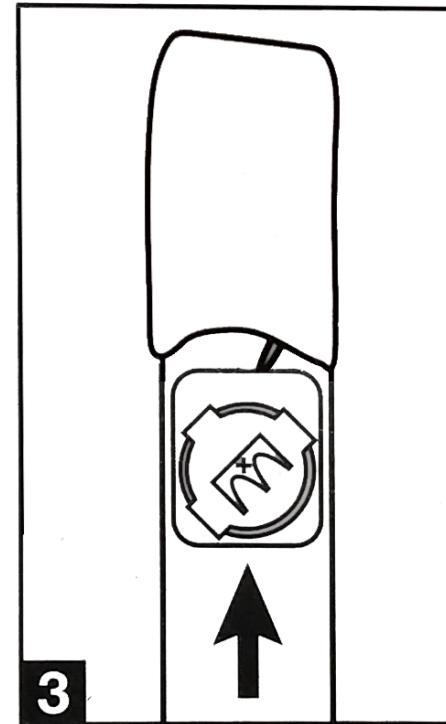

Replace battery holder into elastic pouch.

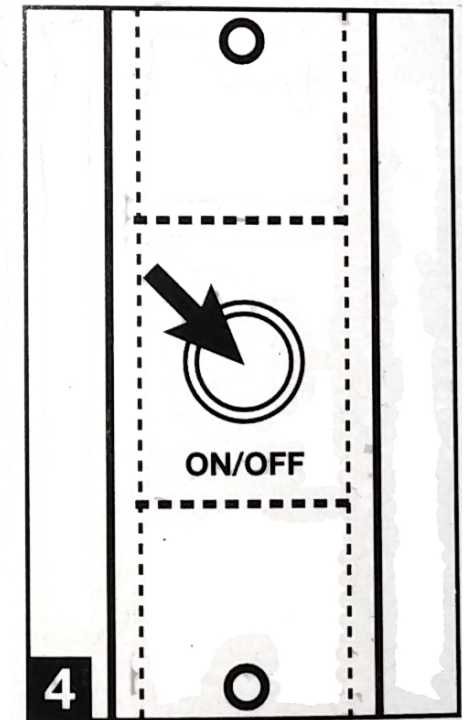

Turn safety band over and press ON/OFF button to turn on flashing lights.

\* Dispose of old battery according to your local regulations. Battery may also be returned to MAXSA Innovations for proper disposal.