

COMPLETE LINE OF FIRE SAFETY LIGHTING

Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.






FEATURES & SPECIFICATIONS at a glance

					HEA	DGE	EAR						HAN	IDH	ELD											SC	ENE	LIGH	ITS									
	HELM MOUN		LOV PROF				HEL	LMET KI	TS					USB				AN	GLE		LAN	TERN	AR	EA						SA	FETY						TR	AFFIC
	NSP-4650B	XPP-5466R	NSP-4616B	XPP-5462RX	XPP-5418RX	XPP-5418RX-K01	FDL-300R	FDL-300R-K01	NS-HMC6	NS-HMC1	NS-HSR1	USB-320	USB-556XL	USB-558XL	NSR-9854XL	USB-578XL	XPP-5566RX	XPP-5570RA	XPR-5568RX	XPR-5572RA	XPR-5581RX	XPR-5582RX	NSR-1514	NSR-1514C	NSP-1162	NSP-1164	NSP-1166	NSP-1168	NSP-1170	NSP-1172	NSP-1174	NSP-1176	NSP-1178	NSP-1180	NSR-2070	NSR-2072	NSP-1632	NSP-1634
DUAL-LIGHT™		-															╚																					
MULTI-FUNCTION																							_							-								-
BATTERY INCLUDED	2 CR123	2 CR123	3 AA	AA			2 CR123	2 CR123									AA	AA							AA AA			AAA	AAA									
LI-ION RECHARGEABLE																																						
CR123 BATTERY CARRIER		_									_																											
USB																																						
WATERPROOF		_															_																					-
LENGTH	3.2	3.2		1.25	5.6	5.6	5.5	5.5				4.5	4.6	5.9	6.7	5.8	6.6	7.6	6.6	7.6	8	7.5	6.1	32	11	11	11	11	11	11	11	11	11	11	11.625	11.625	_	
HANDLE WIDTH/DIAMETER	1.4	1.4	3.75	3.75	.75 X 1.4	.75 X 1.4	1.03	1.03				0.8	1	1	1.01	1.03	2.6	3.2	2.6	3.2	4.75	4.75			1.1x1.5	1.5	1.5											
WARRANTY	LL	Ш	Ш	Ш	Ш	Ш	Ш	Ш	14	14	1Y	LL	LL	LL	LL	LL	Ш	Ш	Ш	Ш	LL	LL	117	14	1Y	17	17	1Y	1Y	17	17	11	14	17	17	17	17	11
	NFPA		NFPA	NFPA	NFPA	IECEX NFPA C E	NFPA C€	NFPA C €	NFPA C €	NFPA C €	NFPA C €	NFPA C€	NFPA C€	NFPA C€	NFPA C€	NFPA C€	EX IECEX NFPA	EX IECEX MSHA	EX IECEX NFPA C E	EX MSHA	SUDJEST DESTRUCTION OF THE PARTY OF THE PART	NFPA		NFPA CE	C€	CE												
FLASHLIGHT																																						
LUMENS	220	250	250	275	200	200	180	180				320	750	900	850	900	200	200	205	205	1100	1750			150	150	150	150	150	150	150	150	150	150	150	150		
RUNTIME (HRS.)	3.5	3.5	6.5	6.75	10.5	10.5	3	3				1.5	1	2	2	4	11	21	7	6	3.5	5			10	10	10	10	10	10	10	10	10	10	7.5	7.5	18	18
BEAM DISTANCE (M)	183	203	78	120	143	143	190	190				111	195	215	280	185	401	267	401	267	625																	
FLOODLIGHT																																						
LUMENS	100	115	250	250											200	250	100	200	100	200	600		1000	1000	120	120	120	120	120	120	120	120	120	120	50	50		
RUNTIME (HRS.)	10	3.5	6.5	7											2.5	4	11	21	7	6	7		4	4	4	4	4	4	4	4	4	4	4	4	4	4		
DUAL-LIGHT™																																						
LUMENS	175	150	450	310											300	375	205	200	205	200	1350																	
RUNTIME (HRS.)	4.5	3.5	3.5	6											2.5	4	11	21	7	6	3.5																	

LL = Limited Lifetime Warranty 1Y = 1-Year Limited Warranty

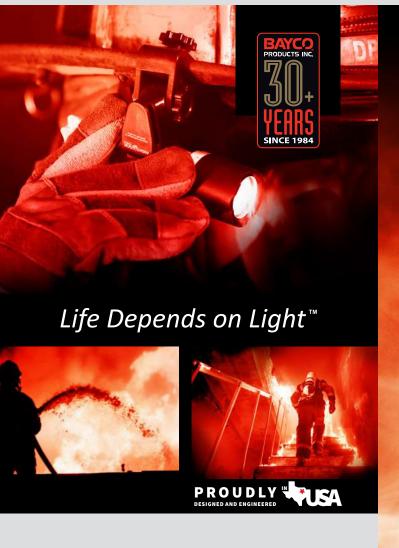





PERFORMANCE, QUALITY AND VALUE

CHAMPION PERFORMANCE Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as; candela, beam distance and run-times. Throughout the design process we take into consideration all of these factors for the best efficiency and performance. Our products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, real-world switch functionality, state-of-the-art electronics and the latest generation battery technology. Innovations like our exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light with the ability to turn both on simultaneously, is altering the idea of what a flashlight is capable of. Innovative thinking is reflected across the complete line of products.

COMMITMENT TO QUALITY All products produced at our dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave the distribution facility. Each product is backed with a warranty and a 100% customer service satisfaction experience.

perform with a higher quality standard than any other product in its class. Even with the highest quality standards, the Nightstick line costs less compared to competitors. We remain committed to delivering the industry's best performing and highest quality products at the lowest cost possible.





- A POWERFUL 1750 LUMENS
- PIVOT HEAD PROVIDES ENDLESS VERSATILITY

LIGHTWEIGHT

INCLUDES AN EASY-TO-USE SNAP-IN



INTRINSICALLY SAFE LIGHTING PRODUCTS

Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.



BANDS

ZERO-BAND



90L **Multi-Function** XPP-5450GC. ▶

(mount only) 180L

◀ XPP-5452G XPP-5452GC ▶ (mount only)



160L

Dual-Light™ XPP-5454GC ▶ (mount only)





175L

Multi-Function Dual-Light™ (red floodlight)

190L **◀** XPP-5458G (green floodlight)



200L **Multi-Function** Dual-Light™ Low-Profile XPP-5460GCX ▶

(mount only)





310L

DICATA™ **Multi-Function** Low-Profile





180L **Multi-Function** Dual-Light™

XPR-5560G ▶ (broad beam)

140L **Multi-Function** Dual-Light™

(focused beam)





THE MAGNET

Limitless hands-free use in

Lights up the immediate walking area along with a distance beam for maximum safety

any critical situation

THE DUAL-LIGHT™









LANTERN



300L VIRIBUS™ Multi-Function Dual-Light™ AILABLEIN





7

8

9

Multi-Function Dual-Light™ (with magnets) 400L

XPR-5542GMX ▶



THE SCREW

This locking screw is required to ensure the ultimate user safety by deterring intentional or accidental battery exposure in a hazardous environment

THE MATERIAL

Glass nylon polymer material withstands extreme conditions

THE LENS

The polycarbonate lens is specifically designed and sealed to withstand virtually any environment



THE CERTIFICATION MARK

Permissible Nightstick Flashlight/Floodlight APPROVAL No. 20-A130001-0 3 10 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11

CAN/CSA STD C22.2 No 60079-11

CSA STD C22.2 No 25

1 MSHA Certification

3 N. America Certification

2 Certifying Agency Logo

4 ATEX Certification

5 Testing Standards

6 CE Mark **7 INMETRO Certification**

8 IECEx Certification

9 ATEX/IECEx Certification

10 Tested Temperature Range

						Н	EADI	LAM	PS							ARE	A LIC	HTS	5						HA	AND	HELI	DS					
	XPP-5450G	XPP-5450GC	XPP-5452G	XPP-5452GC	XPP-5454G	XPP-5454GC	XPP-5456G	XPP-5458G	XPP-5460GX	XPP-5460GCX	XPP-5462GX	XPP-5466G	XPR-5560G	XPR-5561G	XPP-5566GX	XPR-5568GX	XPP-5570GA	XPR-5572GA	XPR-5580G	XPP-5410G	XPP-5412G	XPP-5414GX	XPP-5414GX-K01	XPP-5418GX	XPP-5418GX-K01	XPP-5420G	XPP-5420GX	XPP-5422G	XPP-5422GM	XPP-5422GX	XPP-5422GMX	XPR-5522GM	XPR-5542GMX
DUAL-LIGHT™																																	
MULTI-FUNCTION																																	
BATTERY	3 AAA	3 AAA	3 AAA	3 AAA	3 AAA	3 AAA	3 AA	3 AA	3 AAA	3 AAA	3 AA	2 CR123	LI-ION	LI-ION	3 AA	LI-ION	6 AA	LI-ION	LI-ION	2 AAA	3 AAAA	2 AA*	2 AA*	3 AA*	3 AA*	3 AA*	3 AA*	3 AA*	3 AA*	3 AA*	3 AA*	LI-ION	LI-ION
CLIP/MOUNT																																	
DUSTPROOF/WATERPROOF																																	
LENGTH (IN)	2.4	2.4	2.4	2.4	2.1	2.1	3.3	3.3	3.5	3.5	1.25	3.2	3.46	3.46	6.6	6.6	7.6	7.6	8	5.8	6.8	6.25	6.25	5.6	5.6	7	7	7	7	7	7	7.3	9.5
WIDTH	1.9	1.9	1.9	1.9	2.6	2.6	3.3	3.3	1.58	1.58	3.75	1.4	1.35	1.35	2.6	2.6	3.2	3.2	4.75														
DEPTH	1.8	1.8	1.8	1.8	1.8	1.8	3.5	3.5	1.875	1.875	1.0		2.43	2.43	2.6	2.6	3	3	5.5														
HANDLE DIAMETER																				0.7	0.5	0.86	0.86	0.75x1.4	0.75x1.4	1.1x1.5	1.1x1.5	1.1x1.5	1.1x1.5	1.1x1.5	1.1x1.5	2.1	1.2
IECEX MSHA NFPA	EX IECEX	IECEX	INCEX	EX IECEX	EX IECEX	€ X IECEX	ECEX MSHA	IECEX MSHA	EX IECEX	EX IECEX	EX IECEX	CUL US	мѕна	© (I) US (EX) IECEX MSHA	© Ustro	C U us LETED EX IECEX NFPA	EX IECEX MSHA	EX IECEX MSHA	C(U) us USTEO EX IECEX	ECEX MSHA	EX IECEX	EX IECEX	EX IECEX	EX IECEX	IECEX	IECEX MISHA	IECEX	IECEX MSHA	ECEX MSHA	IECEX	INCETAGE AMERITANA AMERITANA AMERITANA	EX IECEX MSHA	c (1) us us (Ex)
C€ FLASHLIGHT/SPOTLIGHT	(€	(€	(€	(€	(€	(€	(€	(€	C€	C€	(€	C€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€	(€
LUMENS	90	90	180	180	115	115	100	130	180	180	275	250	90	90	200	200	200	200	210	30	50	120	120	200	200	140	210	120	120	210	210	240	400
	13.5	13.5	6	6	5	5	18	14	3.5	3.5	6.75	3.5	15	13	11	7	21	6	12	18	13.75	24	24	10.5	10.5	140	14	17.5	17.5	14	14	8	10.5
BEAM DISTANCE (M)	80	80	93	93	82	82	140	120	106	106	120	203	47	108	401	401	267	267	635	40	50	111	111	143	143	180	187	170	17.5	187	187	150	215
FLOODLIGHT																																	
LUMENS					120	120	90	100	180	180	250	115	90	70	100	100	200	200	210			120	120					120	120	130	130	175	225
RUNTIME (HRS.)					5.25	5.25	13.5	12.5	3.5	3.5	7	3.5	15	12	11	7	21	6	14			24	24					17.5	17.5	20	20	8.5	10.5
DUAL-LIGHT™																																	5
LUMENS					160	160	175	190	200	200	310	150	180	140	205	205	200	200	300			120	120					240	240	285	285	400	275
RUNTIME (HRS.)					3.5	3.5	6.5	6	3	3	6	3.5	6	9	11	7	21	6	9.25			24	24					4.5	4.5	10	10	4.75	10

All listed products come with a Limited Lifetime Warranty. *Battery not included.







PERFORMANCE, QUALITY AND VALUE

CHAMPION PERFORMANCE | Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as; candela, beam distance and run-times. Throughout the design process we take into consideration all of these factors for the best efficiency and performance. Our products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, real-world switch functionality, state-of-the-art electronics and the latest generation battery technology. Innovations like

our exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light with the ability to turn both on simultaneously, is altering the idea of what a flashlight is capable of. Innovative thinking is reflected across the complete line of products.

COMMITMENT TO QUALITY All products produced at our dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party

> inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave the distribution facility. Each product is backed with a warranty and a 100% customer service satisfaction experience.

THE ORIGINAL

FOR MAXIMUM SAFETY

EXCEPTIONAL VALUE All of our products are designed to out perform with a higher quality standard than any other product in its class. Even with the highest quality standards, the Nightstick line costs less compared to competitors. We remain committed to delivering the industry's best performing and highest quality products at the lowest cost possible.



INTRINSICALLY
SAFE
| LIGHTING |





LAW ENFORCEMENT LIGHTING PRODUCTS

Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.





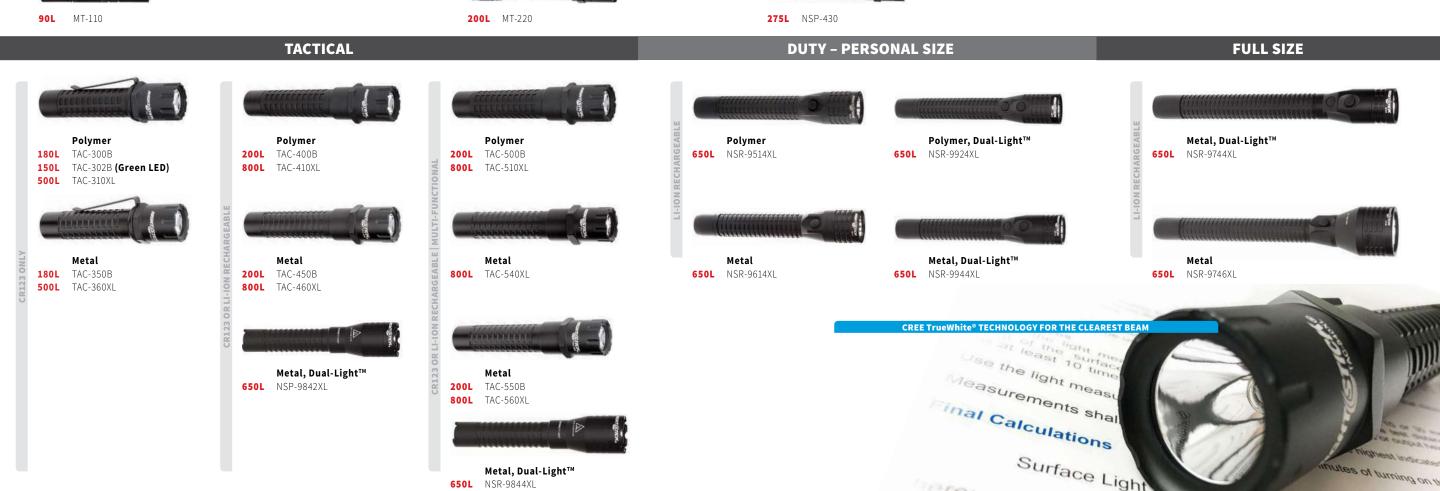

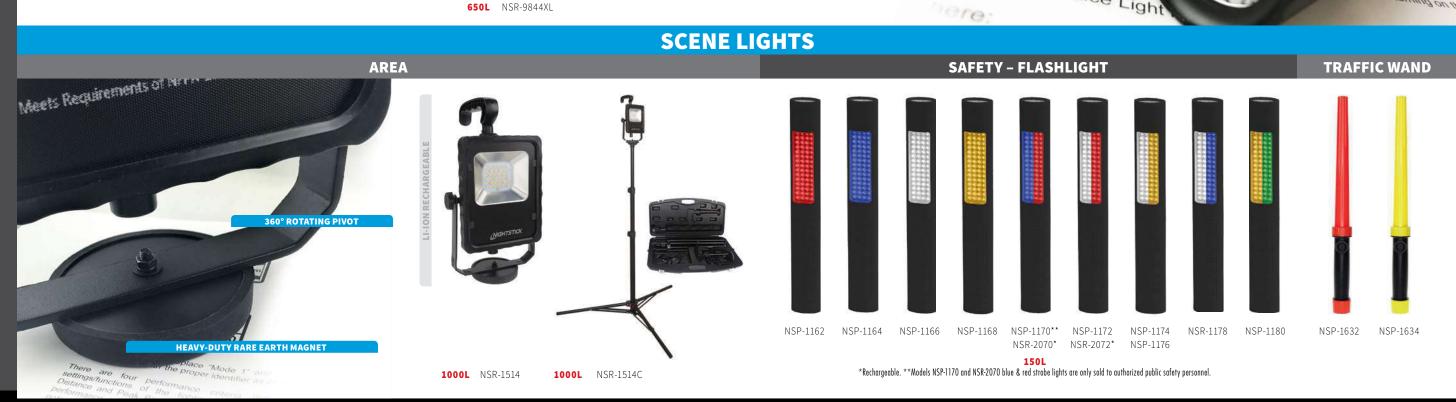

	W	/EAF	PON	MC	DUN	П															TAC	CTI	CAL																			SC	ENE	E LI	GH	TS				
								MIN	NI-TAC		МІ	NI-TAC PRO		ADJUS BE	TABLE AM		USB								TAG	CTICAL								DUTY PERSON/	\L	FULL SIZE		AREA											7	RAFFIC
		П		, d	H.	10	П					T		Ť		Т	1	П		П	Т	Т	Т	Т	Т	\top					Т		П				1	\top												
		OXL	SO	B-K0	B-K0	XL-K											3XL	4XL	В	a	¥		ᆛ	. ×		×	m .	¥	ХL	a	XL 12XI	4XL	4XL	4XL	14XL	4XL	PEXIT	4 C 4	2	5	9	80	9 5	4 4	ي ج	ρρ	9	9	2 2	3 48
	M-35	M-85	M-35	-300	-302	-460	06	100	MT-110	U-10	200	T-210	220	-410	-420	320	3-55	-985	-300	-302	-310	-350	-360	410	-450	-460	-500	-510	-540	-550	-560	1-984	-951	1-961	۱-994	4-74	۶-974 ا	7-151 1-151	-116	-116	-116	-116	-117	-1174	1	-1117	P-1180	٠-2070	7-207 163	-1634
	ž	IMI	ME IN	TAC	TAC	TAC	-TM	Ψ	Ļ M	Ψ ¥	ΨL	M	Ĭ.	NSN 1	NSP R	USE	USE	NSR	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	TAC	NSR	NSR	NSR PON	NSR	RS	NSR	NSN RSN	NSF	NSF	NSP	NSF	NSP NSP	NSP	NSF	NSF	NSF	NSR	NSK NSK	NSF
DUAL-LIGHT™				Ī							П																							•			П													
MULTI-FUNCTION																																																		
BATTERY INCLUDED	2 (R123	2 (R123 (2 2 CR123 CR1	2 CR123	2 (R123	2 CR123	1 AA	2 AAA	1 2 AA AA	2	2 AAA	1 AA	2 AA	1 3 AA A	B 2 A AA				2 CR123	2 (R123	2 CR123 CF	2 R123 CF	2 R123						2 CR123		CR1:	23					П		4 AA	4 AA	4 AA	4 AA	4 4 AA AA	4 A AA	4	4 AA	4 AA		3 A/	A AAA
LI-ION RECHARGEABLE						U																							U			1 =																		
CR123 BATTERY CARRIER											П													IE													П													
AC/DC																													U			1 -																		
USB																																																		
STROBE																																							E	E	13	13	6 6		•		E		6 G	1 13
CLIP																																					П													
WATER RESISTANT																																																		
WATERPROOF																								IC																										
METAL																																																		
POLYMER																								IC																										
LENGTH	3.75	3.75	3.75 3.7	5 6	6	6.75	3.65	5.4	3.9 5.6	5.4	5.5	4	6 4	1.25 4.	5 5.8	4.5	5.9	6.75	5.5	5.5	5.5	5.5	5.5 6.2	5 6.2	5 6.25	6.25	6.25	6.25	6.25	6.25 6	.25 6.7	5 6.75	9	9 9.	9.5	11.75 12	2.75	5.1 32	11	11	11	11	11 11	11	11	11	11	11.625 11.	.625 16	5 16.5
HEAD DIAMETER	1.25	1.25	1.25 1.2	5 1.25	1.25	1.25					0.7	0.9	0.9	1 1.	3 1	1	1.2	1.5	1.25	1.25	1.25 1	.25 1	1.25 1.2	5 1.2	5 1.25	1.25	1.25	1.25	1.25	1.25 1	.25 1.5	5 1.5	1.5	1.5 1.5	1.5	1.5	2.5		1.3	1.3	1.3	1.3	1.3 1.3	3 1.3	1.3	1.3	1.3	1.5	1.5	
HANDLE DIAMETER	1.5	1.5	1.5 1.5	1	1	1	0.6	0.6	0.9 0.9	9 0.6	0.6	0.6	0.6	0.8 1	0.8	0.8	1	1	1	1	1	1	1 1	1	1	1	1	1	1	1	1 1	1	1.25	1.25 1.2	5 1.25	1.25 1	.25												1.	5 1.5
WIDTH X HEIGHT	3.75x1.5	3.75x1.5 3.	75x1.5 3.75>	1.5																																	3.5	X 12 5 X 16	5											
WARRANTY	LL	Ш	шш	ш	LL	Ш	Ш	Ш	u u		ш	Ш	Ш	14 1	Y 1Y	ш	Ш	Ш	LL	Ш	LL	LL	и и	. Ц	LL	Ш	LL	Ш	LL	Ш	u u	. ц	ш	шш	Ш	Ш	u i	17 17	1Y	1Y	14	14	17 11	111	14	14	14	14	1Y 11	Y 1Y
FLASHLIGHT																																																Af	AF	
LUMENS	350	850	350 85	180	150	800	35	100	90 14	0 365nm	100	120	200	115 27	75 275	320	900	850	180	150	500 1	180 5	500 20	0 800	200	800	200	800	800	200 8	800 65	0 650	650	650 65	650	650 6	50		150	150	150	150	150 15	0 150	150	150	150	150 1	150	
RUNTIME (HRS.)	2.5	1.75	2.5 1.7	5 3	3.5	2	1.5	1.5	1 1.5	5 0.75	1.5	1.5	1.5	1 2	2 1.5	1.5	2	2	3	3.5	1.5	3	1.5 3	2	3	2	3	2	1.5	3	2 1.5	5 1.5	6.5	6.5 3	3	6	4		10	10	10	10	10 10	10	10	10	10	7.5 7.	7.5 18	18
BEAM DISTANCE (M)	215	245	215 24	190	180	205	29	44	48 68	3	51	70	100	72 13	3 109	111	215	280	190	180	150 1	190 1	150 21	0 205	210	205	210	205	205	210 2	28	0 280	325	325 27	5 275	275 4	50													
FLOODLIGHT																																																		
LUMENS																		200													25	0 250		20	200	200	1,	000 1,000	120	120	120	120	120 12	0 120	120	120	120	50 5	50	
RUNTIME (HRS.)																		2.5													4	4		5.0	5	10		4 4	4	4	4	4	4 4	4	4	4	4	4	4	
DUAL-LIGHT™																																																		
LUMENS																		300													40	0 400		40	400	400														
RUNTIME (HRS.)																		2.5													2.5	5 2.5		5	5	8.75														
M Berr	-																																																	



Life Depends on Light™







PERFORMANCE, QUALITY AND VALUE

CHAMPION PERFORMANCE Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as; candela, beam distance and run-times. Throughout the design process we take into consideration all of these factors for the best efficiency and performance. Nightstick uses CREE® LEDs, the #1 LED manufacturer in the world. Our products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, real-world switch functionality, state-of-the-art electronics and the latest generation battery technology. Innovations like our exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light with the ability to turn both on

simultaneously, is altering the idea of what a flashlight is capable of. Innovative thinking is reflected across the complete line of products.

COMMITMENT TO QUALITY | All products produced at our dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave the distribution facility. Each product is backed with a

warranty and a 100% customer service satisfaction experience.

EXCEPTIONAL VALUE All of our products are designed to out perform with a higher quality standard than any other product in its class. Even with the highest quality standards, the Nightstick line costs less compared to competitors. We remain committed to delivering the industry's best performing and highest quality products at the lowest cost possible.



Adjustable Beam Metal

NSP-410

NSP-430

Tactical



Long Gun Light Kits

Mini-TAC

Mini-TAC Series Metal

MT-140B

100L 100L

180L



MT-220

Mini-TAC Pro

Mini-TAC Pro Series Metal

Duty / Personal-Size



UV Lights



Tactical Dual-Light Flashlights



Rechargeable Scene / Area Lights









Nightstick products are designed and

manufactured by Bayco Products, Inc.,

is a global brand of professional lighting products including flashlights, headlamps

and Intrinsically Safe lighting solutions that

exceed the industry standards in

has been the preferred choice of

professionals and discriminating

consumers. The Nightstick and Bayco brands are recognized world-wide as high-

performance, high-quality, high-value

lighting solutions across virtually every

industry. Headquartered in North Texas, Bayco Products' 110,000sf facility is the international headquarters for R&D,

distribution. Bayco Products has dedicated ISO 9001 Certified factories both in the US

and abroad.

Full-Size

performance, quality, user-safety and value. Since 1984, Bayco Products, Inc.






Safety Lights

NSR-2124 Red and Blue Strobe (only sold to authorized public safety personnel)

NSP-1260

NSR-2492

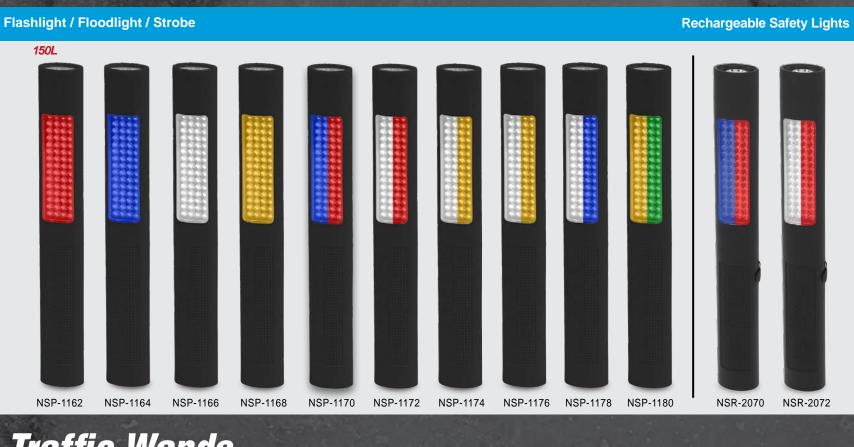

NSP-1310RM

Traffic Wands

Constant-on / Strobe NSP-1632 NSP-1634 NSP-1636

Mini-TAC	Part Number	Lumens	Run-time (hrs)	e Bean Distan		ndela	Water Rating	Case Materi		Power Source	Leng		andle ameter	Weight	Warra	inty C	ertificatio
SERIOR .	MT-90	35	1.5	29 m	2	14 F	Water Resistant	Aircraft-gi Aluminu		1 AAA	3.65 (93 m		.6 in 5 mm)	1.1 oz (34 g)	Limit Lifetii		CE
	MT-100	100	1.5	44 m	4	84 F	Water Resistant	Aircraft-g Aluminu		2 AAA	5.4 i (137 m		.6 in 5 mm)	0.8 oz (23 g)	Limit Lifetii		CE
Titles	MT-100BL	100	1.5	44 m	4	84 F	Water Resistant	Aircraft-g		2 AAA	5.4 i (137 m		.6 in 5 mm)	0.8 oz (23 g)	Limit Lifetii		CE
The same of the sa	MT-100R	100	1.5	44 m	4	84 F	Water Resistant	Aircraft-g		2 AAA	5.4 i (137 m		.6 in 5 mm)	0.8 oz (23 g)	Limit Lifetii		CE
	MT-110	90	1	48 m	5	84 F	Water Resistant	Aircraft-g		1 AA	3.9 i (99 m		.9 in 3 mm)	1.5 oz (43 g)	Limit Lifetii		CE
	MT-120	140	1.5	68 m	1,		Water Resistant	Aircraft-g		2 AA	5.6 i (142 n		.9 in 3 mm)	2.3 oz (65 g)	Limit Lifetii		CE
	MT-130	140	1.5	68 m	1,	173 F	Water Resistant	Aircraft-g		2 AA	5.6 i (142 m Overall 1	m) - 0 5.6 in (2	.9 in 3 mm)	5.2 oz (147 g)	Limit Lifetii		CE
	MT-140B	180	2.5	99 m	2,	433 F	Water Resistant	Aircraft-g		2 AA	(396 m 5.6 i (142 m Overall 2	n m) - 0	.9 in 3 mm)	7.7 oz (219 g)	Limit Lifetii		CE
											(571.5	mm)					
Mini-TAC Pro	Part Number	Multi- Function	Lumens	Run-time (hrs)	Beam Distance	Can	ndela	Water Rating		ase Iterial	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certifica
	MT-200		100 / 60 / 30				34 / 204		Aircrat	ft-grade	2 AAA	5.5 in (140 mm)	0.7 in (18 mm)	0.6 in (15 mm)	1.9 oz (54 g)	Limited Lifetime	CE
	MT-210	Yes	120 / 55 / 30	1.5 / 4 / 6	70 / 51 / 40	m 1,227 / 6	656 / 398	Waterproof		ft-grade	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	MT-220	Yes 2	200 / 90 / 45	1.5 / 4 / 6	100 / 73 / 56 m	2,486	/ 1,335 797	Waterproof		ft-grade minum	2 AA	6 in (152 mm)	0.9 in (23 mm)	0.6 in (15 mm)	3.2 oz (91 g)	Limited Lifetime	CE
	MT-230	Yes	3.6 / 10 / 60	36 / 14 / 2	4 / 46 / 65	m 4/538	3 / 1,076	Waterproof		ft-grade minum	1 AA	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
Mini TAC IIV	Part	Multi-		Run-time	Beam			Water	С	Case	Power		Head	Handle			0 415
Mini-TAC UV	Number MTU-106	Function	Lumens 365	(hrs)	Distance	Car	ndela	Rating Water	Aircra	aterial aft-grade	Source 2 AAA	5.4 in	Diameter	Diameter 0.6 in	Weight	Limited	Certifica
			Nanometers 365					Resistant		minum aft-grade		(137 mm) 5.6 in (142 mm) -		(15 mm) 0.9 in	(23 g) 5.2 oz	Limited	
	MTU-136		Nanometers	1.25				Resistant	Alui	minum	2 AA	Overall 15.6 in (396 mm)		(23 mm)	(147 g)	Lifetime	CE
Tactical	Part Number	Xtreme Lumens I	Multi- Function	umens	Run-time (hrs)	Beam Distance	Cande	ela Wate Ratir		Case Material	Power Source	Lengt	Head Diamet		Weight	Warranty	Certifica
	FDL-300R			180	3	190 m	9,150	0 Waterp		Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300B			180	3	190 m	9,150	0 Waterp		Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300T			180	3	190 m	9,150	0 Waterp		Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300Y			180	3	190 m	9,150	0 Waterp	oroof N ₃	Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-302B			150	3.5	180 m	8,072	2 Waterp		Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-310XL	Yes		500	1.5	150 m	5,59	7 Waterp		Glass-filled ylon Polymer	2 CR-12 Lithium				4.4 oz (124 g)	Limited Lifetime	CE
	TAC-350B			180	3	190 m	9,150	0 Waterp		ircraft-grade Aluminum	2 CR-12 Lithium				5.7 oz (162 g)	Limited Lifetime	CE
	TAC-360XL	Yes		500	1.5	150 m	5,59	7 Waterp		ircraft-grade Aluminum	2 CR-12 Lithium				5.7oz (162g)	Limited Lifetime	CE
	TAC-400B			200	3	210 m	12,00	00 Waterp		Glass-filled ylon Polymer	Rechargea Lithium-io				4.9 oz (140g)	Limited Lifetime	CE
	TAC-400Y			200	3	210 m	12,00	00 Waterp		Glass-filled ylon Polymer	Rechargea Lithium-io				4.9 oz (140 g)	Limited Lifetime	CE
	TAC-410XL	Yes		800	2	205 m	10,76	65 Waterp		Glass-filled ylon Polymer	Rechargea Lithium-io				4.9 oz (140 g)	Limited Lifetime	CE
				200	3	210 m	12,00	00 Waterp		ircraft-grade	Rechargea				6.3 oz	Limited	CE
	TAC-450B									Aluminum	Lithium-io	on (159 m	m) (32 mn	n) (26mm)	(179 g)	Lifetime	

12,000 / 4,951 / 2,250

10,765 / 6,182 / 2,460

12,000 / 4,951 / 2,250

9,150

8,072

10,765

1.25 in (32 mm)

6.25 in (159 mm) 1.25 in (26mm) 5.1 oz (145 g)

6.25 in (1.25 in (1.035 in (1.73 g) (1.73 g)

1.25 in (32 mm) 1.035 in (26mm)

288 oz (3,629 g)

5 in (127 mm)

CE

CE

2 CR-123 Lithium (152 mm) w/RPS

Aircraft-grade Lithium. Upgrade-able to recharge-able Lithium-ion (170 mm)

Rechargeable Lithium-ion

1.035 in

210 / 150 /

200 / 125

200 / 125 / 65

180

800

TAC-500B

TAC-500T

Long Gun Kits

Part Xtreme Lumens Hulti-Function Lumens

NSR-1514

NSR-1514C

Area Lights

3/6/12

3/6/12

3/6/12 210/150/ 95 m

2 / 3.75 / 8.75 205 / 157 / 99 m

1.5 / 2 / 4.5 205 / 157 / 99 m

2 / 3.75 / 8.75 205 / 157 / 99 m

3/6/12

3

3.5

2

1,000 / 500

1,000 / 500

210 / 150 / 95 m

190 m

180 m

205 m

4/8

4/8

	NSP-420	Yes	275/1	15/45	2/5.5/24	133 m	4,445	Water		ircraft-grade Aluminum	3 AAA	4.5 (114 r		.3 in 3 mm) (2			1 Yea
	NSP-430		27	75	1.5	109 m	3,003	Water		ircraft-grade Aluminum	2 AA	5.8 (147 r					1 Yea
Outy/Personal-Size	Part		Xtreme	Multi- Func-	Lumens	Run-time	Bean			Vater Cas		ower	Length	Head			nt W
3 1	NSR-9514XL		Lumens	tion	350 / 200 / 50	(hrs)	325 / 16	66 / 26	,280 / Ма	Gla	ass-filled Red	charge-	8.9 in	Diame	n 1.2 in	10.1 0	oz L
	n .				350 / 200 / 55	4.25 / 8.5 /	85 m	35 / 24	,100 /	Gli	olymer Lithi	um-ion	8.9 in	1.6 ir	n 1.2 in	10.1 0	z L
	NSR-9614XL		Yes		350 / 200 / 50	32.5	325 / 16	66 / 26	,200	terproof Airc	raft-grade Rec	um-ion harge-	8.9 in	1.6 ir	n 1.2 in	12.8 0	z L
0.0	NSR-9920XI		Yes	Yes	650 / 300 / 150 / 200	4.25 / 9.5 / 18.75 /	304 / 21 115 n	12/ 23	,142 /	Gli	ass-filled Rec	um-ion charge-	9.5 in (241 mm	1.6 ir	n 1.2 in	10.9 0	z L
	NSR-9924XL	L Yes	Yes	Yes	/ 400 650 / 300 / 150 / 200	7.25 / 7 4.25 / 9.5 / 18.75 /	304 / 21 115 n	12 / 23		Gli	ass-filled Red	harge-	9.5 in (241 mm	1.6 ir	n 1.2 in	9.9 02	z L
- Co.	NSR-9940XI	L Yes	Yes	Yes	/ 400 650 / 300 / 150 / 200	7.25 / 7 4.25 / 9.5 / 18.75 /	304 / 21 115 n	12 / 23	,028 ,142 / ,302 / Wa	terproof Airc	raft-grade	harge-	9.5 in (241 mm	1.6 ir	n 1.2 in	13.2 0	z L
(1) 10 10 10 10 10 10 10 10 10 10 10 10 10	NSR-9944XL	L Yes	Yes	Yes	/ 400 650 / 300 / 150 / 200	7.25 / 7 4.25 / 9.5 / 18.75 /	304 / 21 115 n	12 / 23		torproof Airc	raft-grade	harge-	9.5 in (241 mm	1.6 ir	n 1.2 in	13.2 0	z L
					/ 400	7.25 / 7		6	,028		Lith	um-ion		7 (7 (55	7 (4.18	"
Full-Size	Part Number	r Dual- Light	Xtreme Lumens	Multi- Function	Lumens	Run-time (hrs)	Bear Distan		andela	Water Rating		Power Source	Length	Head Diamete			W
	NSR-9744XL	L Yes	Yes	Yes	650 / 300 / 150 / 200 / 400	6 / 10.5 / 26 10 / 8.75	/ 275 / 2 146 r		75 / 9,687 4,857		Aluminum	echarge- able hium-ion	11.8 in (300 mm)	1.6 in (41 mm		17.5 oz (496 g)	
	NSR-9746XL	L	Yes	Yes	650 / 390 / 100	4/8/44	450 / 25 70 m	95/ 2	4,253 / 5,834 / V 15,286		Aluminum	echarge- able thium-ion	12.8 in (325 mm)	2.4 in (61 mm		22.5 oz (638 g)	
		Part	Mul	ti-	Run-time	Water		Case	Por	ver							
Traffic Wands	Nu	umber P-1632	Func	tion	(hrs)	Rating	M Eng	aterial		ırce	Length 16.5 in		1.575 i	in	Weight 5.3 oz	1	rran Yea
		P-1634	Ye		18/27	Waterpro	eng Eng	ineered	3 A		(419.1 mm)		(40 mr	in	(151 g) 5.3 oz	1	mite Yea
		P-1636	Ye		18 / 27	Waterpro	eng Eng	ineered	3 A		(419.1 mm)		1.575 i	in	(151 g) 5.3 oz	1	Year miter
								olymer			(419.1 mm)		(40 mr	")	(151 g)		iiile
Headlamps	Part Number	Dual- Light	Multi- Functio	n Lu	mens R	un-time (hrs) I	Beam Distance	Candela	Water Rating		ial Sourc	e VV	/idth	Height	Depth	Weight	W
	NSP-4602B	Yes	Yes	30 /	15 / 35 15 /	36.5 / 12	19 m	92	Waterpro	Folyli	ner SAAA	(61		1.9 in (48 mm)	1.8 in (46 mm)	3.3 oz (94 g)	L
	NSP-4603B	-	Yes	12	0 / 70 5	.5 / 14 14	14 / 100 m	5,324 / 2,498	Waterpro	Polym	ner 3 AAA	(63.		2.2 in (56 mm)	2 in (51 mm)	3.5 oz (100 g)	1 L
Danne	NSP-4604B	Yes	Yes			/8/8.5	93 m	2,169 7,960 /	Waterpro	Engine	ner 3 AAA	(63.	.5 in 5 mm)	2.2 in (56 mm) 2.2 in	2 in (51 mm)	3.5 oz (101 g) 3.5 oz	1
	NSP-4605B	<u> </u>	Yes		3	4 / 7.5 17 5 / 8.5 /	75 / 126 m	4,081	Waterpro	Polym	ner 3 AAA	(63.		(56 mm) 2.2 in	(51 mm)	(100 g)	L .
	NSP-4606B NSP-4608B	Yes	Yes		60 / 90 / 5 / 1	4.25 3.5 / 4.25	116 m	1,506 / 77	Waterpro	Polym	ered 3 AAA	(63.	5 mm) .6 in	(56 mm) 2.1 in	(51 mm)	(100 g) 3.3 oz	L
	NSP-4608BC	Yes	Yes	100 /	60 / 90 / 5 / 1	3.5 / 4.25	7 / 55 m	1,506 / 77	<u> </u>	Engine	ered 3 AAA	2.	.6 in	(53 mm) 2.1 in	(46 mm)	(94 g) 3.4 oz	L
	NSP-4610B		Yes	150 /	80 / 100 4 /	9/4/25	60 / 43 m	1,377 / 66	<u> </u>	engine	ered 3 A A A	2.	.5 in	1.8 in	(46 mm)	(97 g) 3.7 oz	L
A	NSP-4612B	Yes	Yes	100 /	90 / 20 / 18 /	13.5 / 75	140 m	4,820	Waterpro	Polym	ered 3 AA	3.	.3 in	(46 mm) 3.3 in	(43 mm) 3.5in	(104 g) 9.5 oz	L
		 				37 / 3.5				Polyii	ler	+	-	(84 mm)	(89 mm)	(269 g)	
Ser.	NSP-4614B	Yes	Yes		0 / 75 75 / 300	3/6 7 1.5	76 / 55 m	1,315 684	Waterpro	of Engine Polym			.6 in (mm)	1.6 in (40 mm)	1.9 in (48 mm)	5.8 oz (164 g)	L
	1	+-															
	NSP-4616B	Yes	Yes	250	/ 125 / 6.	5 / 10.5 5 / 10.5 .5 / 6.5	78 / 71 m	1500 1250	Waterpro	of Engine Polym				1.25 in (32 mm)	1 in (25 mm)	9.3 oz (265 g)	
Multi Ruracco	Part	Dual-	Xtreme	250 450 Multi-	/125/ 6. 0/250 3	5 / 10.5 7	Beam	1250	Water	Polym	Power	(95	oth	(32 mm) Head	(25 mm)	(265 g)	L
Multi-Purpose		Dual-	Xtreme	250 450	/ 125 / 6.	5 / 10.5 7 .5 / 6.5		1250	Water Rating	Case Material Engineere	Power Source	Len 6.5	gth D	Head Diameter	(25 mm)	(265 g) Weight 2.6 oz	t W
Silver	Part Number	Dual- Light	Xtreme	250 450 Multi- Function	/ 125 / 6. 0 / 250 3	7.5 / 6.5 Run-time (hrs)	Beam	1250	Water Rating Water Resistan	Case Material Engineere Polymer	Power Source ad 3 AAA	Len 6.5 (165)	gth D (Sinm) (Sinm)	Head Diameter	(25 mm) Handle Diameter 1.1 x 0.8 ir	(265 g) Weight 2.6 oz (74 g) n 1.8 oz	t W
Silved #	Part Number NSP-1310RM NSP-1206R	Dual- Light Yes	Xtreme	250 450 Multi- Function Yes	/ 125 / 6. 3 Lumens 5 / 150 9 / 16 / 17	80 / 2.25	Beam Distance	1250	Water Rating Water Resistan Water Resistan	Case Material Engineers Polymei	Power Source 3 AAA 2 AAA 2 AAA 2 AAA	(95) Len 6.5 (165) 4.4 (112)	gth D (Sin mm)	Head Diameter	(25 mm) Handle Diameter 1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g)	t W
Silver	Part Number NSP-1310RM NSP-1206R NSP-1260	Dual- Light Yes Yes	Xtreme	250 450 Multi- Function Yes	/125/ 6. 3 Lumens 5/150 9/16/17 150/120/60/270	80/2.25 5/7/4	Beam Distance	1250 Candelae 53	Water Rating Water Resistan	Case Material Engineers Polymei	Power Source and 3 AAA 2dd 2 AAA 4 AA	Len 6.5 (165) 4.4 (112)	gth D (3	Head Diameter	Handle Diameter 1.1 x 0.8 ir (28 x 20 mm	(265 g) Weight 2.6 oz (74 g) n 1.8 oz (51 g) n 8.2 oz (233 g)	t W
Silver	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B	Dual- Light Yes Yes Yes	Xtreme	250 450 Multi- Function Yes	/125/ 6. // 250 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 270 60 / 25 / 90	8/10.5 7 Run-time (hrs) 80/2.25 5/7/4 10/4/10/ 3/3/1.5	Beam Distance 15	1250 8 Candela 53	Water Rating Water Resistan Water Resistan Water Resistan	Case Material Engineers Polymer Engineers Polymer Engineers Polymer Engineers Polymer	Power Source at 2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3	(95) Len 6.5 (165) 4.4 (112) 10.9 (277) 5.3 (135)	gth D in (3	Head Diameter	(25 mm) Handle Diameter 1.1 x 0.8 ir (28 x 20 mn) 1.3 x 0.9 ir (33 x 23 mm) 1.1 x 0.8 ir (28 x 20 mn)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g) 8.2 oz (233 g) 1.8 oz (26 g)	
**	Part Number NSP-1310RM NSP-1206R NSP-1260	Dual- Light Yes Yes	Xtreme	250 450 Multi- Function Yes	/125/ 6. 3 Lumens 5/150 9/16/17 150/120/60/270	80/2.25 5/7/4	Beam Distance 15	1250 Candelae 53	Water Rating Water Resistan Water Resistan Water Resistan	Case Material Engineere Polymei Engineere Polymei Engineere Polymei Engineere Polymei Engineere Polymei Engineere Polymei	Power Source and 3 AAA 2 AAA AAA 2 AAA AAAA	(95) Len 6.5 (165) 4.4 (112) 10.9 (277) 5.3 (135) 5.3 (135)	gth D i in (3	Head Diameter	1.1 x 0.8 ir (28 x 20 mn) 1.1 x 0.8 ir (28 x 20 mn) 1.1 x 0.8 ir (28 x 20 mn)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g) 8.2 oz (233 g) 1.8 oz (62 g) 1.8 oz (62 g)	1 L L L L L L L L L L L L L L L L L L L
Silver	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B	Dual- Light Yes Yes Yes	Xtreme	250 450 Multi- Function Yes	/125/ 6. // 250 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 270 60 / 25 / 90	8/10.5 7 Run-time (hrs) 80/2.25 5/7/4 10/4/10/ 3/3/1.5	Beam Distance 15 50 m	1250 8 Candela 53	Water Resistan Water Resistan Water Resistan Water Resistan Water Resistan	Case Material Engineere Polymer Engineere Polymer Engineere Polymer Engineere Polymer Engineere Polymer Engineere Polymer	Power Source and 2 AAA	(95) Len 6.5.5(165) 4.4.4(112) 10.9 (277) 5.3.3(135) 5.3.6(135)	ggth D (3 in mm) (3 in mm)	Head Diameter	1.1 x 0.8 ir (28 x 20 mr)	(265 g) Weight 2.6 oz (74 g) n 1.8 oz (75 g) n 8.2 oz (233 g) n 2.2 oz (62 g) n 2.2 oz (62 g) n 2.2 oz (62 g)	1 L W 1 L 1 L L 1 L L
SSEADONE SE	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B	Dual- Light Yes Yes Yes Yes	Xtreme	Multi- Function Yes Yes Yes	/125/ 6. // 250 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 270 60 / 25 / 90	8/10.5 7.5/6.5 7.5/6.5 7.5/6.5 7.5/6.5 80/2.25 5/7/4 10/4/10/ 3/3/1.5 3/3/1.5	Beam Distance 15 50 m	1250 Candela 53 650 650	Water Rating Water Resistan Water Resistan Water Resistan Water Resistan	Case Material Engineere: Polymei Engineere: Engineere: Polymei	Power Source and 2 AAA and	(95) Len 6.5 (165) 4.4 (112) 10.9 (277) 5.3 (135) 5.3 (135)	mm) Garage Garage	Head Diameter	1.1 x 0.8 ir (28 x 20 mm) 1.3 x 0.9 ir (28 x 20 mm) 1.1 x 0.8 ir (28 x 20 mm) 1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz m) 8.2 oz (233 g) 1.2 oz (62 g) 1.3 oz (62 g) 1.4 oz (62 g) 1.5 oz (62 g) 1.5 oz (62 g) 1.5 oz (62 g)	
SSEADONE SE	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400C	Pual-Light Yes Yes Yes Yes Yes Yes	Xtreme	250 450 450 Multi-runction Yes Yes Yes	/125/ 6. // 250 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 25 / 90 60 / 25 / 90 60 / 25 / 90	Fun-time (hrs) 80/2.25 5/7/4 10/4/10/ 3/3/1.5 3/3/1.5	Beam Distanc 15 m 50 m 50 m	1250 Candela 53 650 650	Water Rating Water Resistan Water Resistan Water Resistan Water Resistan Water Resistan	Case Material Engineere Polymer	Power Source and 2 AAA and	(95 Len 6.5 (165i) 4.4 (112i) 10.3 (277 5.3 (135 5.3 (135 5.3 5.3 (135 5.3 5.3 (135 5.3 6.3 5.3 6.3 6.3 6.3 6.3 6.3 6.3 6.3 6.3 6.3 6	ggth D (Sin mm) (Sin mm) (Sin mm)	Head Diameter	1.1 x 0.8 ir (28 x 20 mr) 1.1 x 0.8 ir (28 x 20 mr)	(265 g) Weight 2.6 oz (74 g) n 1.8 oz (51 g) n 8.2 oz (233 g) n 2.2 oz (62 g)	1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L 1 L L L 1 L
SSEADONE SE	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400R NSP-1400T NSP-1402B	Pual- Light Yes Yes Yes Yes Yes Yes Yes	Xtreme	250 450 Multi-Function Yes Yes Yes Yes Yes	/125/ 6. // 250 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 270 60 / 25 / 90 60 / 25 / 90 60 / 25 / 90	5/10.5 7.5/6.5	Beam Distance	650 650 650 650	Water Resistan	Case Material Engineere Polymer	Power Source 2 AAA AAA 2 AAA AAA AAA AAAA AAAA AAAA AAAA AAAA AAAA	(95 Len 6.5.5(165) 4.4.4(112) 10.8(277 5.3.6(135) 5.3.6(135) 5.3.6(135) 5.3.6(135)	mm)	Head Diameter	1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g) 1.8 .2 oz (233 g) 1.8 .2 oz (62 g) 1.9 (62 g)	1 L W 1 L L L L L L L L L L L L L L L L
SSEADONE SE	Part Number NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400T NSP-1400T	Pual-Light Yes Yes Yes Yes Yes Yes Yes Yes	Xtreme	Multi-Function Yes Yes Yes Yes Yes Yes	/125 / 6. / 3 Lumens 5 / 150 9 / 16 / 17 150 / 120 / 60 / 270 60 / 25 / 90 60 / 25 / 90 60 / 15 60 / 10	5/10.5 7 5/6.5 7 Run-time (hrs) 80/2.25 5/7/4 10/4/10/ 3/3/1.5 3/3/1.5 3/3/5.5	Beam Distance 15 3 50 m 50 m 50 m 50 m	1250 Candela 53 650 650 650 650 8,150	Water Rating Water Resistan Water Resistan Water Resistan Water Resistan Water Resistan Water Resistan	Case Material Engineere Polymer	Power Source and 2 AAA and	(955 Len 6.5.5.6 (1656 1656 1656 1656 1656 1656 1656 16	ggth D (3 in mm) (3 in mm) (4 in mm)	Head Jameter J.375 in 35 mm)	1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (75 g) 8.2 oz (233 g) 1.8 oz (233 g) 2.2 oz (62 g) 1.8 oz (62 g) 2.2 oz (62 g) 1.8 oz (62 g) 2.2 oz (62 g) 1.8 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 3.0 oz (62 g) 4.1 oz (62 g) 5.4 oz (62 g) 6.4 oz (81 g) 6.4 oz (81 g)	1 L L L L L L L L L L L L L L L L L L L
SSEADONE SE	Part Number NSP-1310RM NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400R NSP-1400T NSP-1400T NSP-1404B	Pual- Light Yes Yes Yes Yes Yes Yes Yes Yes Yes	Xtreme	Yes Yes Yes Yes Yes Yes	/125/ 0/250 6. 3 Lumens 5/150 9/16/17 150/120/ 60/25/90 60/25/90 60/25/90 60/15 60/10 130/110 /235	5/10.5 7.5/6.5	Beam Distance	1250 Candela 53 650 650 650 650 8,150 8,150	Water Resistan	Case Material Engineere Polymer	Power Source and 2 AAA and 2 AAA and 2 AAA and 2 AAA and 3 AA	(955 Len (956 Len (95	gth D (3 in mm) (4 in mm) (4	Head plameter 1.375 in 35 mm)	1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g) 1.8 .2 oz (233 g) 1.9 .2 .2 oz (62 g)	
iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	Part Number NSP-1310RM NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400T NSP-1400T NSP-1400T NSP-1404B NSP-1404B	Pual-Light Yes	Xtreme	Yes Yes Yes Yes Yes Yes Yes Yes	/125/ 6.0/250 3 Lumens 5/150 9/16/17 150/120/60/270 60/25/90 60/25/90 60/15 60/10 130/110 /235 200/170	Fun-time (hrs) 80 / 2.25 5 / 7 / 4 10 / 4 / 10 / 3 / 3 / 1.5 3 / 3 / 1.5 3 / 3 / 1.5 3 / 3 / 1.5 9.5 / 10.5 / 9.5 / 10.5 /	Beam Distance	1250 Candela 53 650 650 650 650 8,150 8,150 6,953	Water Resistan	Case Material Engineere Polymei	Power Source and 3 AAA and 2 AAA and 2 AAA and 2 AAA and 3 AA and	(95 Len 6.5. (165) 4.4. (1124) 10.8 (277 5.3.3 (135) 5.3.3 (135) 5.3.3 (135) 7.1 (178 7.1 (1	mmm) (4	Head plameter 1.375 in 35 mm)	1.1 x 0.8 ir (28 x 20 mm) 1.3 x 1 in (33 x 25 mm) 1.3 x 1 in (33 x 25 mm) 2.3 in	(265 g) Weight 2.6 oz (74 g) 1.8 oz (75 g) 8.2 oz (233 g) 1.8 oz (233 g) 1.8 oz (23 g) 1.8 oz (62 g)	1 L L L L L L L L L L L L L L L L L L L
iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	Part Number NSP-1310RM NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400T NSP-1400T NSP-1404B NSP-1404B NSP-2422B	Pual-Light Yes	Xtreme	Yes Yes Yes Yes Yes Yes Yes Yes Yes	125 / 6. 3 3 3 3 3 3 3 3 3	5/10.5 7.5/6.5	Beam Distance 15 3 50 m 50 m 50 m 50 m 6 181 m 6 181 m 7 170 m 7 170 m	1250 Candela 53 650 650 650 650 8,150 8,150 6,953	Water Resistan	Case Material Engineere Polymer Engineere Engineere Engineere	Power Source and 3 AAA and 2 AAA and 2 AAA and 2 AAA and 2 AAA and 3 AA and	(955 Len 6.5.5 (165) 4.4.4 (112) 10.9 (277 5.3.3 (135) 5.3.3 (135) 5.3.4 (135) 5.3.4 (135) 7.7 (178 7.7 (178 178 178 178 178 178 178 178 178 178	gth D (sin mm) (sin m	Head plameter 1.375 in 35 mm) 1.8 in 46 mm) 1.8 in 46 mm) 1.8 in 44 mm) 1.1.3 in 1.3 in 1.3 in 1.4 in 1.3 in 1	1.1 x 0.8 ir (28 x 20 mm) 1.2 x 1 in (33 x 25 mm) 1.3 x 1 in (33 x 25 mm) 2.3 in (58 mm) 1.7 x 1.3 ir (58 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz (51 g) 1.8 2 oz (233 g) 1.2 2 oz (62 g) 1.2 2 oz (62 g) 1.3 2 2 oz (62 g) 1.4 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	1 L L L L L L L L L L L L L L L L L L L
	Part Number NSP-1310RM NSP-1310RM NSP-1206R NSP-1260 NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1402B NSP-2422B NSP-2422B NSP-2422R	Pual-Light Yes	Xtreme	Yes	/125/ 6. 3 3 1 1 1 1 1 1 1 1	Fun-time (hrs) 80 / 2.25 5 / 7 / 4 10 / 4 / 10 / 3 / 3 / 1.5 3 / 3 / 1.5 3 / 3 / 1.5 3 / 3 / 1.5 3 / 2.8 3 / 5.5 9.5 / 10.5 / 9.5 / 9.5 / 10.5 / 9.	Beam Distance 15 3 50 m 50 m 50 m 50 m 6 181 m 6 181 m 7 170 m 7 170 m	1250 Candela 53 650 650 650 650 8,150 8,150 6,953	Water Resistan Water Resistan	Case Material Engineere Polymet Engineere	Power Source and 3 AAA and 2 AAA and 2 AAA and 2 AAA and 2 AAA and 3 AA and	(955 Len	gth D gth I in mm) (4	Head alameter 1.375 in 35 mm) 1.8 in 46 mm) 2.1 in 46 mm) 1.6 in x 1.3 in 31 mm	1.1 x 0.8 ir (28 x 20 mm) 1.1 x 0.8 ir (28 x 20 mm)	(265 g) Weight 2.6 oz (74 g) 1.8 oz oz (233 g) 1.8 0z oz (62 g)	1 1 L L L L L L L L L L L L L L L L L L

4.25 in (108 mm)

CE

CE

CE

CE

CE

CE

1 AA

1,324

Adjustable Beam

Safety Light	ts	Part Number	Multi- Function	Lumens	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Handle Diameter	Weight	Warranty	Certific
		NSP-1162	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CI
		NSP-1164	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CI
(11111111111111111111111111111111111111		NSP-1166	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	С
		NSP-1168	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	С
400000		NSP-1170	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	С
		NSP-1172	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	С
		NSP-1174	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	С
		NSP-1174-K01	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CI
4		NSP-1176	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	С
<u> </u>		NSP-1178	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CI
		NSP-1180	Yes	150 / 120	10 / 4 / 16	Water Resistant	Engineered Polymer	4 AA	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	1 Year Limited	CI
		NSR-2070	Yes	150 / 50	7.5 / 4 / 6	Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	11.625 in (295 mm)	15 in x 1.125 in (38 mm x 29 mm)	6.8 oz (195 g)	1 Year Limited	С
<u> </u>		NSR-2072	Yes	150 / 50	7.5 / 4 / 6	Water Resistant	Engineered Polymer	Rechargeable Lithium-ion	11.625 in (295 mm)	15 in x 1.125 in (38 mm x 29 mm)	6.8 oz (195 g)	1 Year Limited	С





Nightstick - Performance, Quality, and Value

Real-world Product Performance: Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as candela, beam distance and run-times. The design must take into consideration all of these factors to impact a light's efficiency and performance. Nightstick products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, reliable real-world switch functionality, state-of-the-art electronics and latest generation battery technology. Innovations such as

Nightstick's exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light the ability to turn both on simultaneously for added versatility and safety, is altering the idea of what a flashlight is. Further evidence of this innovative

TECHNOLOGY thinking is shown by our complete line of Intrinsically Featuring **Dual-Ligh**t Safe lights that have the highest safety ratings in the world.



All products produced in Bayco Products' dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave

Bayco Products' distribution facility. Quality is also demonstrated in the customer service experience...with a target of nothing less than 100% customer satisfaction. Our quality is also backed by a Limited Lifetime Warranty.

Exceptional Value: Quite simply, the Nightstick product line is designed and manufactured to outperform and be of a higher quality standard than any other product in its class. Even with the highest quality standards, Nightstick products cost less as compared to competitor offerings. We remain committed to delivering the industry's best performing, highest-quality products at the lowest cost possible.



FLY-NSMAP-18



SPORTING GOODS LIGHTING PRODUCTS

Nightstick is the preferred choice of professionals and discriminating consumers worldwide — recognized for high-performance, quality and value.


WEAPON MOUNTED LIGHTS



350L TWM-350 **850L** TWM-850XL



Strobe TWM-350S 350L **850L** TWM-850XLS

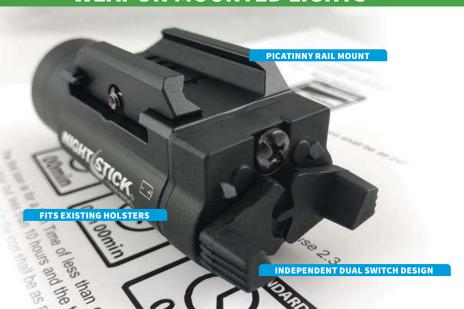



180L TAC-300B-K01



800L TAC-460XL-K01



150L TAC-302B-K01 (Green LED)







NSP-4602B

Dual-Light™

300L NSP-4614B

35L

Dual-Light™





Dual-Light™ 175L NSP-4612B



USB, Strobe USB-4708B



TACTICAL LIGHTS

Dual-Light™

NSP-4616B

450L

MINI-TAC

unungiast is a person who enjoys ad









TACTICAL

DUTY - PERSONAL SIZE FULL SIZE



500L TAC-360XL

100L MT-100





Metal, Dual-Light™

650L NSR-9844XL










FEATURES & SPECIFICATIONS at a glance

	V	VEA	PO	NN	101	ואט			Н	EAD	DLA	MP	S		AR	EA																		'AC'	TIC	AL																
															FLO	OOD		MINI	I-TAC			MINI-	TAC O	•	ADJUS' Be#	TABLE Am		US	В									TACTIC	AL									D PER	UTY SONAL			ULL IZE
	TWM-350	TWM-850XL	TWM-350S	TWM-850XLS	TAC-300B-K01	TAC-302B-K01	TAC-460XL-K01	NSP-4602B	NSP-4608B	NSP-4610B	NSP-4612B	NSP-4614B	NSP-4616B	USB-4708B	NSR-1514	NSR-1514C	MT-90	MT-100	MT-110	MT-120	MT-200	MT-210	MT-220	NSP-410	NSP-420	N37-420	NSP-450	USB-320 USB-558XL	NSR-9854XL	TAC-300B	1000	TAC-300T TAC-302B	TAC-310XL	TAC-350B	TAC-360XL	TAC-400B	TAC-410XL	TAC-450B	TAC-460XL	TAC-500B	TAC-510XL	TAC-540XL	TAC-550B	TAC-560XL	NSP-9842XL	NSR-9844XL	NSR-9514XL	NSR-9614XL	NSR-9924XL	NSR-9944XL	NSR-9744XL	NSR-9746XL
DUAL-LIGHT™																					Г																															
MULTI-FUNCTION																																																				
BATTERY INCLUDED	2 CR123	2 CR123	2 CR123	2 CR123	2 CR123	2 CR123	2 CR123	3 AAA	3 AAA	3 AAA	3 AA	3 AAA	3 AA				1 AA	2 AAA	1 AA	2 AA	2 AAA	1 AA	2 AA	1 AA	3 AA	A A	2 A			2 CR12	23 CR1	2 123 CR12	2 23 CR123	2 CR123	2 CR123							2 CR123			2 CR123							
LI-ION RECHARGEABLE							O																																			U			U							
CR123 BATTERY CARRIER																																																				
AC/DC																																										U			U							
USB																					П				Т																											
STROBE																																																				
CLIP																																																				
WATER RESISTANT																																																				
WATERPROOF																																																				
METAL																																																				
POLYMER																																																				
LENGTH	3.75	3.75	3.75	3.75	6	6	6.75	2.2	2.1	1.8	3.3	3.54	1.25	7	6.1	32	3.65	5.4	3.9	5.6	5.5	4	6	4.25	4.5	5 5	.8 4.	.5 5.9	6.75	5.5	5.	5.5	5.5	5.5	5.5	6.25	6.25	6.25	6.25	6.25	6.25	6.25	6.25	6.25	6.75	6.75	9	9	9.5	9.5	11.75	12.75
HEAD DIAMETER	1.25	1.25	1.25	1.25	1.25	1.25	1.25							1.8							0.7	0.9	0.9	1	1.3	3	1	1 1.2	1.5	1.25	5 1.5	.25 1.2	5 1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.5	1.5	1.5	1.5	1.5	1.5	1.5	2.5
HANDLE DIAMETER	1.5	1.5	1.5	1.5	1	1	1										0.6	0.6	0.9	0.9	0.6	0.6	0.6	0.8	1	0	.8 0.	.8 1	1	1	1	1 1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1.25	1.25	1.25	1.25	1.25	1.25
WIDTH X HEIGHT	3.75x1.5	3.75x1.5	3.75x1.5	3.75x1.5				2.5x2	2.6x1.8	2.5x1.7	3.3x3.5	1.58x1.87	3.75x1	1x1.3	3.5 x 12	5x16																																				
WARRANTY	ш	ш	Ш	ш	Ш	Ш	Ш	1Y	Ш	LL	Ш	Ш	Ш	14	14	14	Ш	Ш	ll	LL	ш	LL	ш	14	11	Y 1	Y L	1 II	LL	Ш	L	ц ц	LL	LL	Ш	LL	Ш	Ш	Ш	Ш	LL	LL	Ш	LL	LL	Ш	Ш	LL	Ш	LL	Ш	ш
STRAP(S) INCLUDED								NYLON	NYLON	NYLON	NYLON & Rubber	NYLON & RUBBER	RUBBER	NYLON																																						
LOW PROFILE																																																				
FLASHLIGHT																																																				
LUMENS	350	850	350	850	180	150	800	30	100	150	100	150	250				35	100	90	140	100	120	200	115	27:	5 2	75 32	20 900	850	180) 18	80 150	500	180	500	200	800	200	800	200	800	800	200	800	650	650	650	650	650	650	650	650
RUNTIME (HRS.)	2.5	1.75	2.5	1.75	3	3.5	2	15	5	4	18	3	6.5				1.5	1.5	1	1.5	1.5	1.5	1.5	1	2	! 1	.5 1.	.5 2	2	3	3	3 3.5	1.5	3	1.5	3	2	3	2	3	2	1.5	3	2	1.5	1.5	6.5	6.5	3	3	6	4
BEAM DISTANCE (M)	215	245	215	245	190	180	205	19	77	60	140	76	78	211			29	44	48	68	51	70	100	72	13:	3 10)9 11	11 215	280	190) 19	90 180	150	190	150	210	205	210	205	210	205	205	210	205	280	280	325	325	275	275	275	450
FLOODLIGHT																																																				
LUMENS								15	90	100	90	150	250	1,000	1,000	1,000													200																250	250			200	200	200	
RUNTIME (HRS.)								36.5	4.25	4	13.5	3	6.5	2.25	4	4													2.5																4	4			5.0	5	10	
DUAL-LIGHT™																																																				
LUMENS								35	180		175	300	450																300																400	400			400	400	400	
RUNTIME (HRS.)								12	2.5		3.5	1.5	3.5																2.5																2.5	2.5			5	5	8.75	

□ =Upgradeable LL = Limited Lifetime Warranty 1Y = 1-Year Limited Warranty

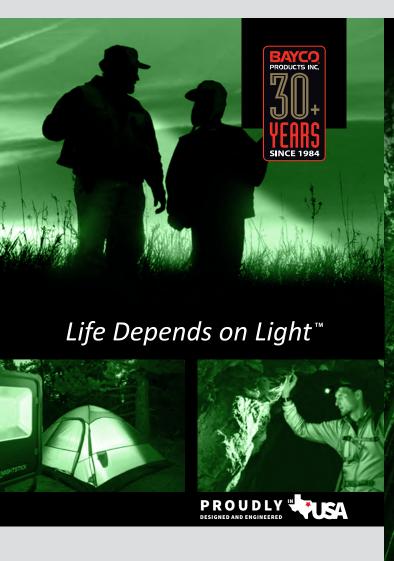





PERFORMANCE, QUALITY AND VALUE

CHAMPION PERFORMANCE Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as; candela, beam distance and run-times. Throughout the design process we take into consideration all of these factors for the best efficiency and performance. Nightstick uses CREE® LEDs, the #1 LED manufacturer in the world. Our products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, real-world switch functionality, state-of-the-art e ctronics and the latest generation battery technology. Innovations like our exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light with the ability to turn both on

simultaneously, is altering the idea of what a flashlight is capable of. Innovative thinking is reflected across the complete line of products.

ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave the distribution facility. Each product is backed with a warranty and a 100% customer service satisfaction experience.

EXCEPTIONAL VALUE All of our products are designed to out perform with a higher quality standard than any other product in its class. Even with the highest quality standards, the Nightstick line costs less compared to competitors. We remain committed to delivering the industry's best performing and highest quality products at the lowest cost possible.