




Instruction Manual

NSP-4608B/4610B

US PATENT 9,713,217

Please read these instructions before using this product. They include important safety and operation information.

WARNINGS

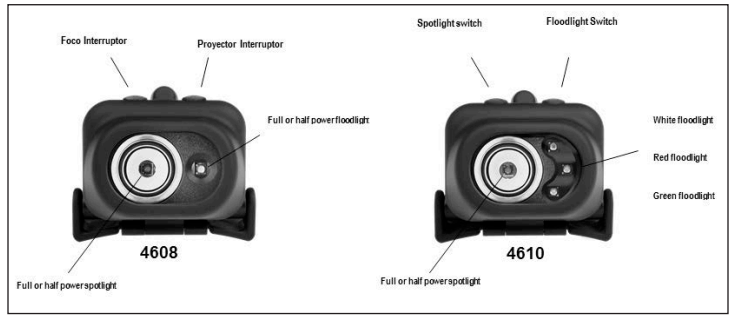

- Second Press = spotlight low-brightness
- Third Press = white floodlight
- Fourth Press = off

FLOODLIGHT SWITCH

- First Press = red floodlight
- Second Press = green floodlight
- Third Press = off

- NOT FOR USE ABOVE HAZARDOUS LOCATIONS
- DO NOT use in explosive atmospheres, near flammable liquids, or where explosion proof lamps are required.
- DO NOT use in the proximity of vehicles or equipment when there is a risk of flammable liquids coming into contact with the flashlight.
- DO NOT expose the batteries to water or salt water, or allow the batteries to get wet.
- DO NOT store the batteries with metallic objects that may cause a short circuit.
- Immediately discontinue use of the batteries if they emit an unusual smell, feel hot, change color, change shape or appear abnormal in any way.
- Keep out of the reach of children.

INSTALLING BATTERIES

- Unscrew the battery compartment door on the back of the headlamp.
- Insert the batteries per the outline inside the battery compartment. Observe the correct polarity of the batteries.
- Close the battery door and fasten the battery compartment door screw.
- The headlamp is now ready for use.

OPERATION

Two switches control all functions on both models.

NSP-4608B

SPOTLIGHT SWITCH

- First Press = spotlight high-brightness
- Second Press = spotlight low-brightness
- Third Press = off

FLOODLIGHT SWITCH

- First Press = floodlight high-brightness
- Second Press = floodlight low-brightness
- Third Press = off

NSP-4610B

SPOTLIGHT SWITCH

- First Press = spotlight high-brightness