



Instruction Manual

NSP-4608BC

US PATENT 9,713,217

Please read these instructions before using this product. They include important safety and operation information.

WARNINGS



- NOT FOR USE ABOVE HAZARDOUS LOCATIONS
- DO NOT use in explosive atmospheres, near flammable liquids, or where explosion proof lamps are required.
- DO NOT use in the proximity of vehicles or equipment when there is a risk of flammable liquids coming into contact with the flashlight.
- DO NOT expose the batteries to water or salt water, or allow the batteries to get wet.
- DO NOT store the batteries with metallic objects that may cause a short circuit.
- Immediately discontinue use of the batteries if they emit an unusual smell, feel hot, change color, change shape or appear abnormal in any way.
- Keep out of the reach of children.

INSTALLING BATTERIES

- Unscrew the battery compartment door on the back of the headlamp.
- Insert the batteries per the outline inside the battery compartment. Observe the correct polarity of the batteries.
- Close the battery door and fasten the battery compartment door screw.
- The headlamp is now ready for use.

OPERATION

THE NSP-4608BC HAS TWO BUTTONS THAT CONTROL LIGHT OUTPUT:

LIGHTING MODES

Pressing the Spotlight Button will turn on the spotlight. Pressing the Floodlight Button will turn on the floodlight. Pressing both buttons will turn on both the Spotlight and the Floodlight. This mode is called Dual-Light.

EACH BUTTON HAS TWO BRIGHTNESS SETTINGS

- High-brightness - Press the desired button once
- Low-brightness - Press the desired button a second time
- Pressing the same button a third time will turn that lighting mode off


THE NSP-4608BC HAS A TILT ADJUSTMENT FEATURE:

Simply adjust the tilt angle of the light to illuminate the desired area.

THE NSP-4608BC FITS ON ANY HARD HAT THAT HAS A HARD HAT LAMP BRACKET ATTACHED.

NIGHTSTICK NS-HMC4 HEADLAMP BRACKET MOUNTING INSTRUCTIONS

- Ensure mounting surface is clean and oil-free (use alcohol wipe if needed)
- Prior to installing, determine mounting location that allows headlamp to fully tilt without interfering with helmet brim.
- Remove adhesive backing.

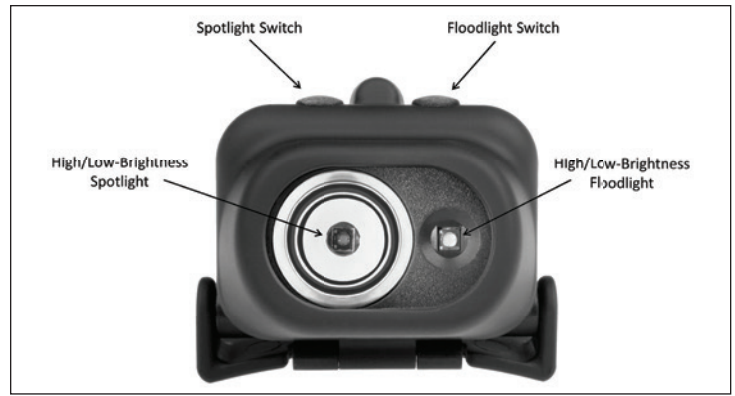

- Firmly press bracket into place up for 30 seconds with flat side facing up (see image).
- While supporting mount, slide headlamp clip into bracket slot. (Note: adhesive reaches peak strength in 24 hours)

TO ATTACH TO THE HARD HAT LAMP BRACKET

Slide the clip on the back of the NSP-4608BC into the slot on the top edge of the Hard Hat Lamp Bracket and press down firmly until the clip is fully engaged into the bracket.

TO REMOVE FROM THE HARD HAT LAMP BRACKET

Grasp the NSP-4608BC and pull up until the clip slides out of the Hard Hat Lamp Bracket.