

**DATE:** March 24, 2010

**TITLE:** Additional Decals Have Been Added To The Lids Of Selected Pelican™ Case Models

**PRODUCTS AFFECTED:** 1510, 1650, 1700, 1720, 1750

**DETAILS:** To further strengthen the Pelican brand, an extra logo decal has been added to the “dual band” section on the lid.

Cases which currently feature the new decal:

- 1510 Case
- 1650 Case
- 1700 Case
- 1720 Case
- 1750 Case



Additional case models will follow.

New logo decal on case lid





# 1750

## Protector

Long Case

Sensitive equipment needs protection, and since 1976 the answer has been the Pelican™ Protector Case. These cases are designed rugged, and travel the harshest environments on earth. Against the extreme cold of the arctic or the heat of battle, Pelican cases have survived. Made in the USA, these tough cases are designed with an automatic purge valve, that equalizes air pressure, a watertight silicone O-ring lid, over-molded rubber handles and stainless steel hardware.

- Personalized nameplate service available
- **Strong polyurethane wheels with stainless steel bearings**
- **Watertight, crushproof, and dustproof**
- 3-piece foam set
- Automatic Pressure Equalization Valve - balances interior pressure, keeps water out
- Easy open Double Throw latches
- Fold down handles
- O-ring seal
- Open cell core with solid wall design - strong, light weight
- Stainless steel hardware and padlock protectors



## CONFIGURATIONS



**1750**  
Standard



**1750NF**  
No Foam



**1750WF**  
With Foam

## DIMENSIONS

<b>Interior (LxWxD)</b>	50.50 x 13.50" x 5.25 (128.3 x 34.3 x 13.3 cm)
<b>Exterior (LxWxD)</b>	53.00 x 16.00" x 6.12 (134.6 x 40.6 x 15.5 cm)
<b>Lid Depth</b>	1.75" (4.4 cm)
<b>Bottom Depth</b>	3.50" (8.9 cm)
<b>Total Depth</b>	5.25" (13.3 cm)
<b>Int Volume</b>	2.07 ft <sup>3</sup> (0.059 m <sup>3</sup> )
<b>Padlock Hole Diameter</b>	5/16" (8 mm)

## MATERIALS

<b>Body</b>	Polypropylene
<b>Latch</b>	ABS
<b>O-Ring</b>	Polymer
<b>Pins</b>	Stainless Steel
<b>Foam</b>	1.3 lb Polyurethane

**Purge Body** ABS  
**Purge Vent** 3 Micron Hydrophobic Non-Woven

## COLORS

■ Black      ■ Desert Tan      ■ OD Green

## WEIGHT

**Weight With Foam** 25.57 lbs (11.6 kg)  
**Weight Empty** 23.59 lbs (10.7 kg)  
**Buoyancy** 187.39 lbs (85 kg)  
**Master Pack Weight** 25.65 lbs (11.6 kg)

## TEMPERATURE

**Minimum Temperature** -40°F (-40 °C)  
**Maximum Temperature** 210°F (98.9 °C)

## CERTIFICATIONS

**IP67**  
**Def Stan 81-41**  
**STANAG 4280**


## FOAM PROPERTIES

**Layer 1 (Lid)** 1.63" Pad  
**Layer 2 (Base)** 1.63" Pad  
**Layer 3 (Base)** 1.63" Pad

## OTHER

**Wheels** 2  
**Master Pack** 1  
**Nameplate** yes  
**Military** yes

## ACCESSORIES



**1751**  
3 pc. Replacement Foam Set



**1753**  
Replacement O-ring



**1506TSA**  
TSA Lock



**1500D**  
Desiccant Silica Gel



**PL2**  
Padlock (2 pack)


Date: December 22, 2009

TITLE: The Pelican™ 1720 and 1750 Long Cases Now Have 4 Padlock Holes For Increased Security

PRODUCTS AFFECTED: Pelican 1720 and 1750 Long Cases

INTRODUCTION: To discourage break-ins and comply with the latest government standards for air transportation, two extra lock holes have been added to the 1720 and 1750 Long Cases.

## DETAILS:

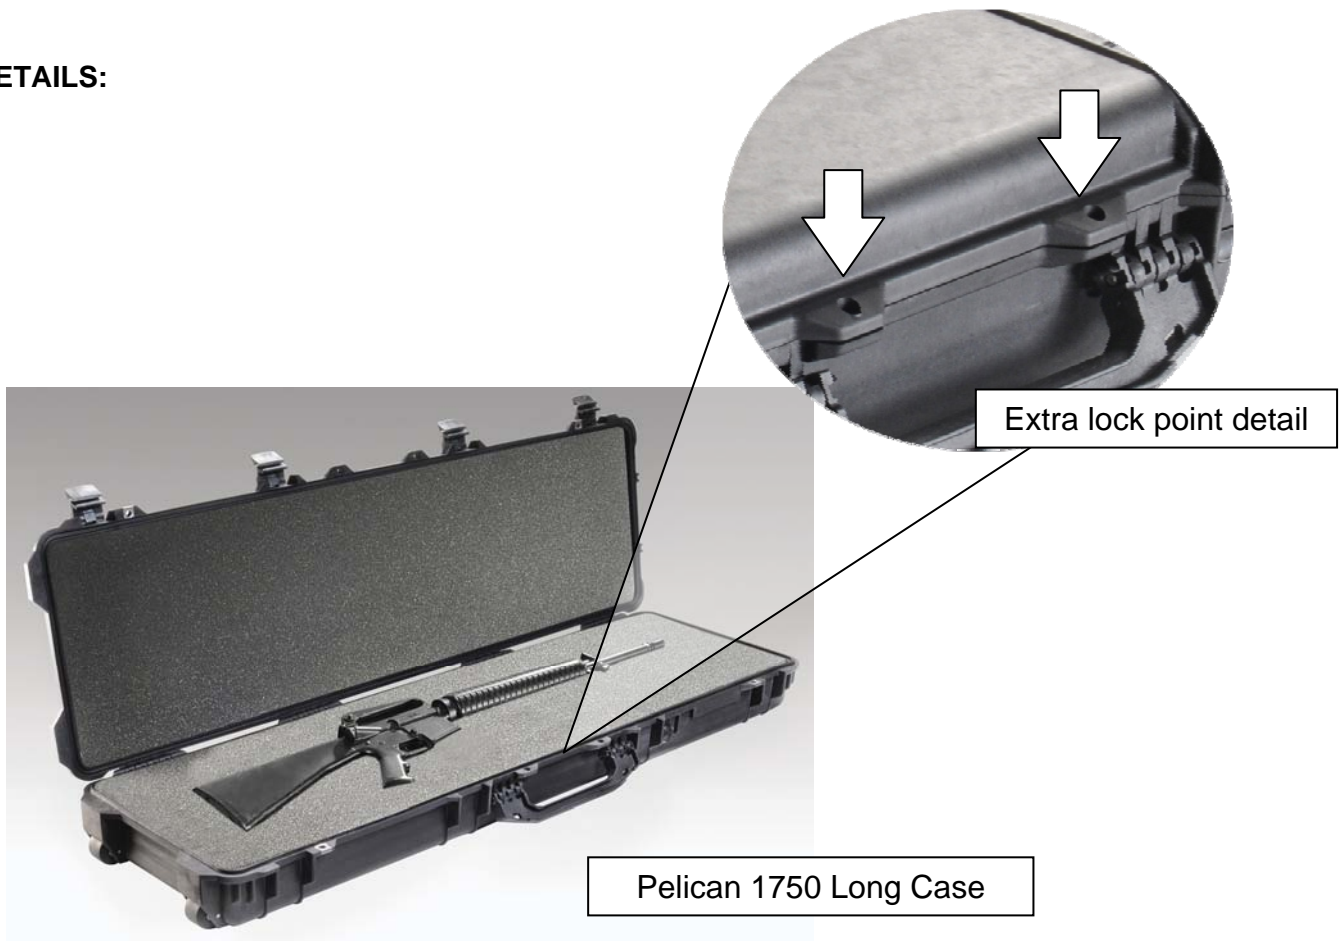

**TITLE: Pelican Protector™ Case Mobility Wheel Material Change**

**PRODUCT AFFECTED: All Pelican Protector™ Cases with wheels – 1440, 1510, 1560, 1610, 1620, 1630, 1640, 1650, 1660, 1690, 1700, 1720, 1750, 1780**

**INTRODUCTION: Nylon hubs have been added to all wheels on Pelican Protector™ Cases.**

**DETAILS:**

**Nylon hubs (which connect the polyurethane wheel to the ball bearings) were chosen for their extreme heat and impact resistance.**



**Medium Case Wheel (1440 – 1560)**



**Large Case Wheel (1610 – 1780)**