

DATE: May 5, 2010

TITLE: The Pelican 2010 SabreLite™ LED Recoil™ Has Received A Safety Approval Upgrade

PRODUCTS AFFECTED: 2010 SabreLite LED Recoil, 2010PL SabreLite Recoil LED

DETAILS:

The Pelican 2010 SabreLite LED Recoil now has Edison Testing Labs - ETL Class I II III, Division 1 Approvals (for gas, dust & fiber/flyings).



2010 SabreLite Recoil LED

Official approvals are:




Class I II III Division 1 Groups ABCDFG T4 (Energizer), T3 (Duracell & Panasonic)



2010PL SabreLite Recoil LED

Two approvals were removed:

- FM Class I, Div. 1 Gp. D T4/Class I, Div. 2 Gp. ABCD T4/CL II, III, Div. 1, Gp. FG
- CSA Class I, Div. 1 Gp. D T3C/CL. I, Div. 2 Gp. ABCD T3C / CL II, Div. 1, Gp. FG

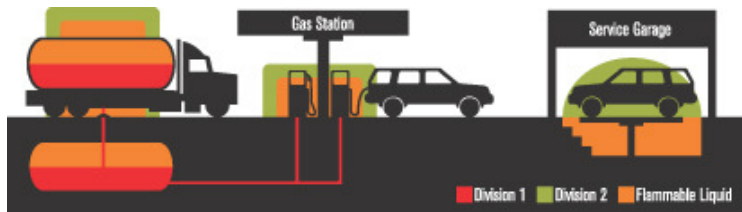

HAZARDOUS AREA ELECTRICAL GUIDELINES					
	SUBSTANCE	TYPICAL ENVIRONMENTS	US CLASSIFICATION	EUROPEAN CLASSIFICATION	VOLATILITY
CLASS 1	Flammable Gasses, Vapors or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	- Oil Refinery - - Paint Warehouse - - Offshore Oil Rig - - Spray Booth -	Division 1 (Hazard Likely)	Zone 0 (Hazard Certain)	MOST ↑ ↓ LEAST
			Division 2 (Hazard Not Likely)	Zone 1 (Hazard Likely)	
CLASS 2	Combustible Dusts (Metals (p>1 μm), Coal, Grain)	- Coal Mine - - Grain Silo - - Munitions Factory - - Hay Storage Facility -	Division 1 (Hazard Likely)	Zone 0 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Zone 1 (Hazard Likely)	
CLASS 3	Ignitable Fibers & Flyings (Machined Magnesium)	- Paper Mill - - Woodworking Facility - - Textile Mill - - Cotton Gin -	Division 1 (Hazard Likely)	Zone 0 (Hazard Certain)	
			Division 2 (Hazard Not Likely)	Zone 1 (Hazard Likely)	
					Zone 2 (Hazard Not Likely)



2010PL SabreLite™

Same features as the SabreLite™ 2010 LED Flashlight, but outfitted with a lens ring that emits a bright glow in the dark. The new generation photoluminescent material in the plastic absorbs the energy from any light source - fluorescent lights, the sun, or even the flashlight's own beam. No more fumbling in the dark for your flashlight.

- As bright as a Xenon light with the battery life of an LED
- Built Pelican tough
- Glow-in-the-dark shroud
- Super bright LED beam
- Twist on/off activation
- Unconditional Lifetime Guarantee of Excellence
- **NOW WITH NEW UPGRADED SPECS**
- Waterproof




DIMENSIONS

Length 8.11" (20.6 cm)

MATERIALS

Body EXL
O-Ring Ethylene Propylene
Lens Polycarbonate (PC)
Shroud K-Resin
Clip ABS
Contact Spring Retainer Stainless Steel / Brass Nickel

COLORS

 High Visibility Yellow

LIGHT SPECS

Lamp Type LED

POWER

Battery Size C
Battery Type Alkaline
Battery Quantity 3
Volts 4.5v

WEIGHT

Weight With Batteries 13.4 oz (380 gr)
Weight Without Batteries 5.4 oz (153 gr)
Packaged Weight 13.4 oz (380 gr)

SWITCH

Switch Type Twisting Lens S
Light Modes On / Off






Document created on 06-03-20

CERTIFICATIONS

Class I, Division 1
Class II, Division 1
Class III, Division 1
IECEX ia

OTHER

Submersible yes
Minimum Pack 1
Package Code C

FL1 STANDARD	HIGH
	161 LUMENS
	22h 0mins
	160m
	6398cd
	IPX7