


*Polyform*  
US<sup>®</sup>

Uniquely Polyform



**BUOYS FENDERS ACCESSORIES**

# POLYFORM FENDERS *Made in the USA*

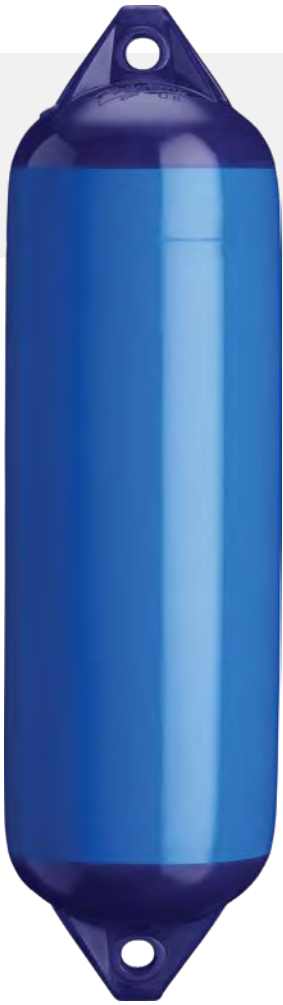


## F SERIES

Unique one-piece construction with even wall thickness for maximum strength and durability


The largest size range available

Best selling heavy-duty fender

- **Twin-eye design hangs vertically or horizontally**
- **Multiple ribbed reinforced ropeholds for the most demanding applications**
- **Designed for use in permanent unprotected moorings, pilings, locks and concrete walls**
- **Unique vinyl valve seals securely**
- **For boats 20 ft. to 70+ ft. in length**
- **Now available with black ropeholds by special order**

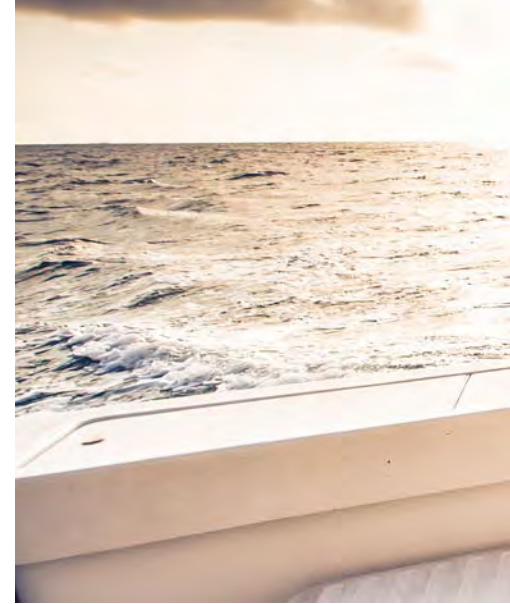


DUAL VALVE SYSTEM on the F-13: "AIR IN" for easy inflation. "AIR OUT" for easy deflation and storage.

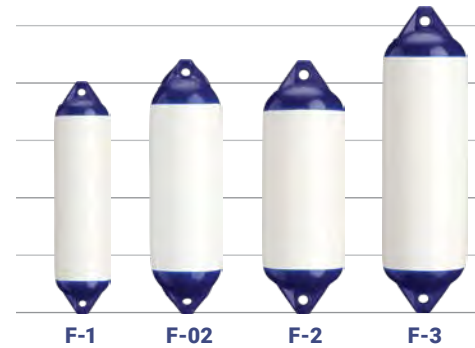

## F SERIES SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON	BOAT SIZE
				CIRCUMFERENCE	DIAMETER						
F-1	6"	24"	0.7"	18.9"	6"	1.9 gal.	2.6 lb.	10	28.3 lb.	1.9 ft <sup>3</sup>	20'-30'
F-02	7.5"	26"	0.7"	23.6"	7.5"	3.1 gal.	3.2 lb.	10	35.5 lb.	3.2 ft <sup>3</sup>	20'-30'
F-2	8.2"	25"	0.9"	25.8"	8.2"	4.3 gal.	4.0 lb.	10	43.5 lb.	3.2 ft <sup>3</sup>	20'-30'
F-3	8.2"	30"	0.9"	25.8"	8.2"	5.4 gal.	5.3 lb.	10	56.9 lb.	3.8 ft <sup>3</sup>	20'-30'
F-4	8.5"	40.5"	0.9"	26.7"	8.5"	7.7 gal.	7.5 lb.	5	41.9 lb.	3.3 ft <sup>3</sup>	30'-40'
F-5	11"	30"	1.0"	34.6"	11"	7.3 gal.	6.0 lb.	5	33.5 lb.	3.2 ft <sup>3</sup>	30'-40'
F-6	11"	42"	1.0"	34.6"	11"	15.1 gal.	10.2 lb.	5	57.0 lb.	4.9 ft <sup>3</sup>	30'-40'
F-7	15"	41"	1.0"	47.1"	15"	18.8 gal.	10.6 lb.	5	61.3 lb.	6.2 ft <sup>3</sup>	40'-50'
F-8	15"	58"	1.0"	47.1"	15"	39.6 gal.	19.0 lb.	4	84.3 lb.	6.2 ft <sup>3</sup>	60'-70'
F-10	18"	50"	1.0"	56.6"	18"	33.8 gal.	19.6 lb.	2	42.7 lb.	3.2 ft <sup>3</sup>	60'-70'
F-11	21.2"	57.5"	1.1"	66.6"	21.2"	63.7 gal.	25.3 lb.	3	84.2 lb.	6.2 ft <sup>3</sup>	70' & up
F-13	29"	76.5"	1.2"	91.1"	29"	158.6 gal.	62.7 lb.	2	139.3 lb.	9.3 ft <sup>3</sup>	70' & up

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

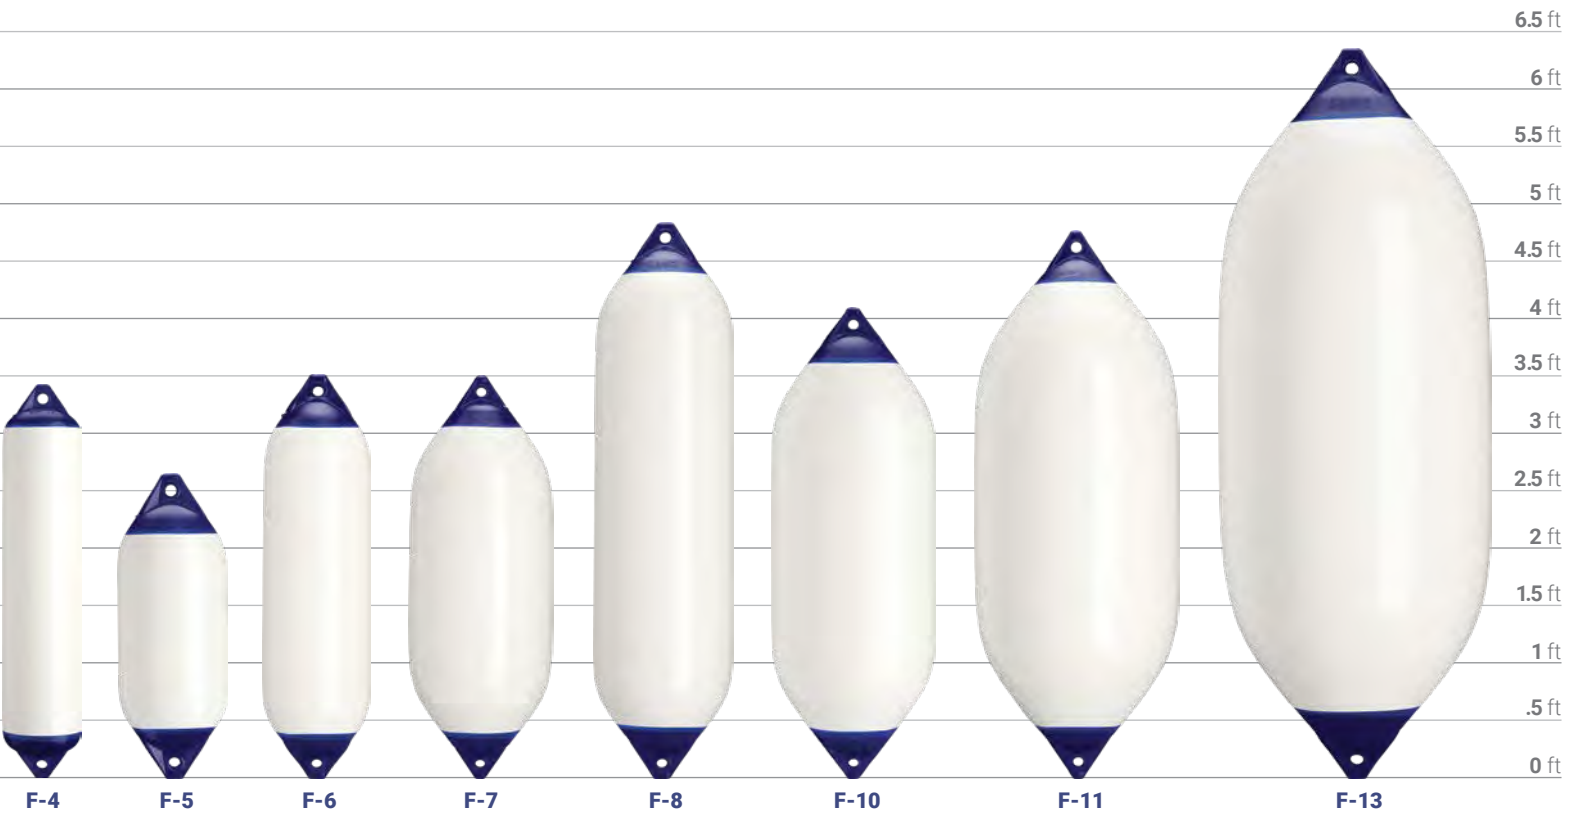

## F SERIES ORDERING INFORMATION

	STANDARD COLOR SKUS		ADDITIONAL COLORS**					
	BLUE	WHITE	BLACK	COBALT BLUE	GREY	NAVY	BLACK + BLACK ROPEHOLD	WHITE + BLACK ROPEHOLD
<b>F-1</b>	65-186-081	82-432-076	38-429-986	25-029-497	32-968-418	63-548-275	80-037-273	01-605-495
<b>F-02</b>	91-210-601	91-318-700	45-488-161	09-032-321	50-220-083	72-138-262	45-803-743	17-654-132
<b>F-2</b>	29-840-825	94-211-739	40-488-138	18-437-546	35-425-823	80-599-873	36-214-625	48-138-929
<b>F-3</b>	67-934-725	83-518-187	64-442-100	98-799-490	36-363-061	23-755-842	73-666-244	24-376-062
<b>F-4</b>	42-002-884	82-633-511	72-249-881	56-994-604	81-341-222	02-130-673	23-523-940	19-640-894
<b>F-5</b>	49-958-248	51-654-951	80-923-911	31-619-526	79-313-752	72-947-783	43-335-261	22-817-236
<b>F-6</b>	48-331-218	20-997-926	91-471-931	97-270-956	03-967-365	27-029-368	68-473-911	20-095-830
<b>F-7</b>	68-917-413	61-633-059	24-367-435	87-375-277	31-775-800	23-611-558	52-680-430	79-172-221
<b>F-8</b>	33-103-940	24-582-243	28-292-760	63-390-760	58-486-316	34-348-569	91-680-308	25-660-771
<b>F-10</b>	60-234-782	45-268-619	03-215-361	63-514-542	07-450-643	20-032-109	68-889-321	66-626-338
<b>F-11</b>	27-077-003	37-453-829	12-856-867	01-770-224	72-341-009	67-344-423	25-676-235	83-842-986
<b>F-13</b>	09-347-774	55-785-521	54-719-310	82-334-204	78-673-179	51-739-382	13-095-852	30-716-599

\*\*Minimum quantities and additional charges may apply. Please contact Polyform US for details.


# POLYFORM FENDERS Made in the USA



## G SERIES

Polyform's most popular utility fender  
The standard for small boats  
Large range of colors available  
**FOR BOATS 10–40 FEET IN LENGTH**

- Hangs vertically or horizontally for use by trailered boats and in permanent protected moorings
- Reinforced rope holds and ribs for extra strength and stability

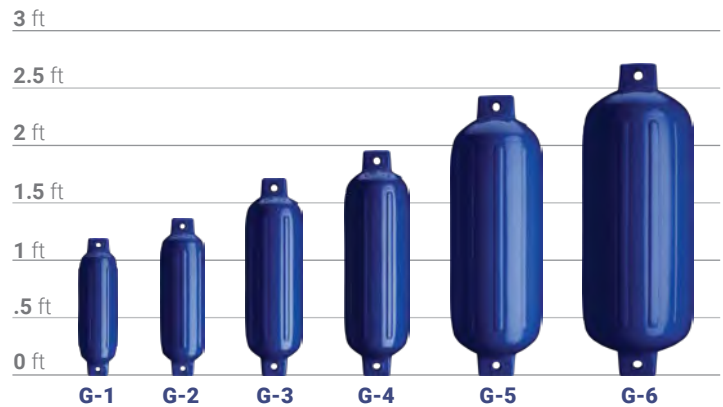

## G SERIES SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON	BOAT SIZE
				CIRCUMFERENCE	DIAMETER						
G-1	3.5"	12.8"	0.375"	11.0"	3.5"	0.4 gal.	0.7 lb.	12	9.4 lb.	1.2 ft <sup>3</sup>	Up to 10'
G-2	4.5"	15.5"	0.50"	14.1"	4.5"	0.7 gal.	1.2 lb.	12	16.2 lb.	2.2 ft <sup>3</sup>	10'–15'
G-3	5.5"	19"	0.625"	17.3"	5.5"	1.4 gal.	1.9 lb.	6	13.2 lb.	2.2 ft <sup>3</sup>	15'–20'
G-4	6.5"	22"	0.75"	20.4"	6.5"	2.2 gal.	2.6 lb.	6	17.9 lb.	3.0 ft <sup>3</sup>	20'–25'
G-5	8.8"	26.8"	0.75"	27.7"	8.8"	5.1 gal.	4.4 lb.	4	20.3 lb.	4.7 ft <sup>3</sup>	25'–35'
G-6	11"	30"	0.875"	34.6"	11.0"	8.5 gal.	6.5 lb.	4	29.2 lb.	7.7 ft <sup>3</sup>	35'–40'

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

## G SERIES ORDERING INFORMATION

STANDARD COLOR SKUS	BLACK	BLUE	BURGUNDY	CATALINA BLUE	CLASSIC RED	COBALT BLUE	GREY	FOREST GREEN	LIME	PURPLE	SAND	TEAL	WHITE
	G-1	27-905-528	05-117-533	94-643-715	04-532-794	73-299-793	39-945-143	85-766-746	92-206-044	78-565-486	17-760-489	66-854-288	52-805-786
G-2	06-198-906	04-271-298	44-927-434	42-926-044	22-487-107	62-647-465	61-344-827	96-985-316	62-986-336	48-750-496	47-538-137	24-609-402	45-162-056
G-3	73-389-943	39-849-422	82-095-487	96-771-582	65-458-809	57-553-272	33-939-351	73-030-171	75-155-202	95-220-726	25-421-919	73-383-112	83-408-891
G-4	22-830-435	44-714-290	25-707-693	49-850-269	05-415-359	49-272-515	75-891-521	71-537-490	20-754-379	91-702-341	08-511-282	04-954-067	63-267-743
G-5	49-941-328	74-434-019	94-151-787	84-661-062	52-819-023	12-964-872	43-628-373	14-443-278	88-110-807	20-218-870	79-178-789	11-023-976	41-639-559
G-6	71-201-180	65-871-829	59-262-624	70-326-667	26-006-803	56-792-454	97-402-565	59-562-690	18-900-184	89-270-374	60-800-418	55-308-827	41-137-889

### ADDITIONAL COLORS\*\*




\*\*Minimum quantities and additional charges may apply. Please contact Polyform US for details.

The classic center tube design allows for hanging vertically or horizontally  
Reinforced tube ends and ribs add strength and durability

**FOR BOATS 20–50 FEET IN LENGTH**

# HTM SERIES

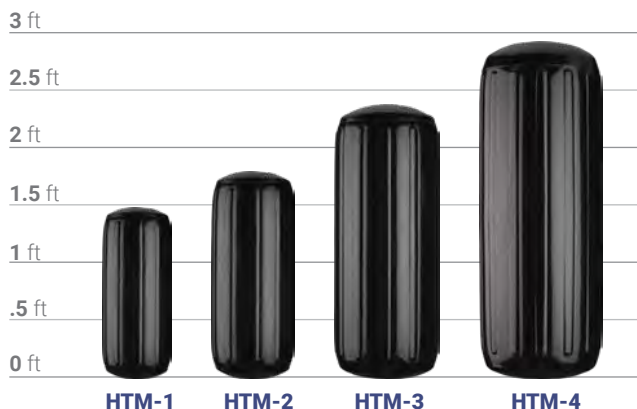

- Designed for medium-duty use in both permanent protected and unprotected moorings
- Useful protection against pilings and other awkward docking situations

## HTM SERIES SPECIFICATIONS

	DIAMETER	LENGTH	TUBE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON	BOAT SIZE
				CIRCUMFERENCE	DIAMETER						
<b>HTM-1</b>	<b>6.3"</b>	<b>15.5"</b>	<b>0.625"</b>	<b>19.8"</b>	<b>6.3"</b>	1.8 gal.	2.5 lb.	6	16.6 lb.	2.4 ft <sup>3</sup>	<b>20'–30'</b>
<b>HTM-2</b>	<b>8.5"</b>	<b>20.5"</b>	<b>0.625"</b>	<b>26.7"</b>	<b>8.5"</b>	4.7 gal.	4.7 lb.	4	20.7 lb.	3.5 ft <sup>3</sup>	<b>20'–30'</b>
<b>HTM-3</b>	<b>10.5"</b>	<b>27"</b>	<b>0.625"</b>	<b>33.0"</b>	<b>10.5"</b>	9.2 gal.	7.7 lb.	4	34.4 lb.	7.0 ft <sup>3</sup>	<b>30'–40'</b>
<b>HTM-4</b>	<b>13.5"</b>	<b>34.8"</b>	<b>0.625"</b>	<b>42.4"</b>	<b>13.5"</b>	15.6 gal.	10.5 lb.	4	47.0 lb.	12.2 ft <sup>3</sup>	<b>40'–50'</b>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

## HTM SERIES ORDERING INFORMATION

STANDARD COLOR SKUS	BLACK	BLUE	BURGUNDY	CATALINA BLUE	CLASSIC RED	COBALT BLUE	FOREST GREEN	GREY	SAND	TEAL	WHITE
	<b>HTM-1</b>	79-751-374	10-377-440	20-287-231	07-864-268	18-643-066	66-407-263	38-923-343	09-301-769	29-279-958	23-488-544
<b>HTM-2</b>	84-065-681	16-436-415	15-460-041	80-842-763	89-237-529	95-396-458	23-684-762	30-612-892	07-834-817	45-580-510	20-953-038
<b>HTM-3</b>	39-149-388	03-088-059	28-678-786	74-639-830	49-671-390	85-083-220	01-469-416	32-520-460	69-191-961	64-314-958	70-051-909
<b>HTM-4</b>	24-890-772	30-347-203	81-572-597	59-360-727	08-800-099	29-047-402	69-619-861	64-282-594	34-539-331	90-910-254	85-236-514

### ADDITIONAL COLORS\*\*



\*\*Minimum quantities and additional charges may apply. Please contact Polyform US for details.



# POLYFORM FENDERS *Made in the USA*



## NF SERIES

The ultimate utility fender with thicker wall construction  
Reinforced rope holds and ribs add strength and durability  
**FOR BOATS 10–35 FEET IN LENGTH**

- Hang vertically or horizontally
- High gloss finish
- Wide range of colors

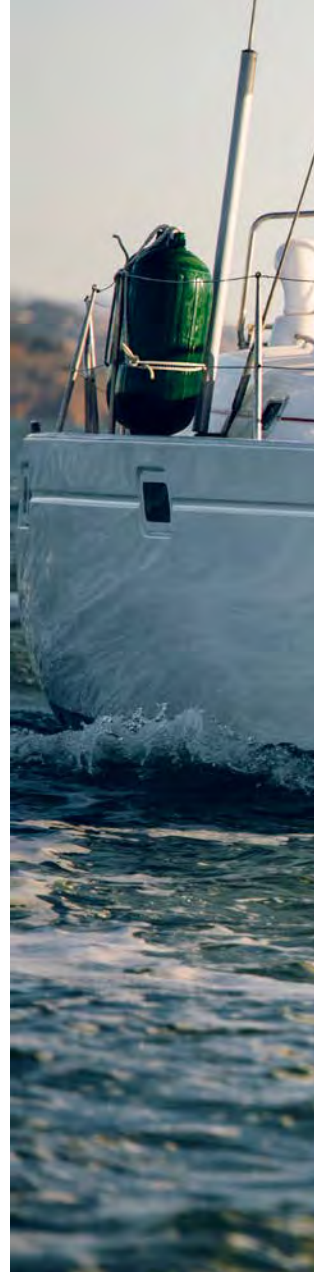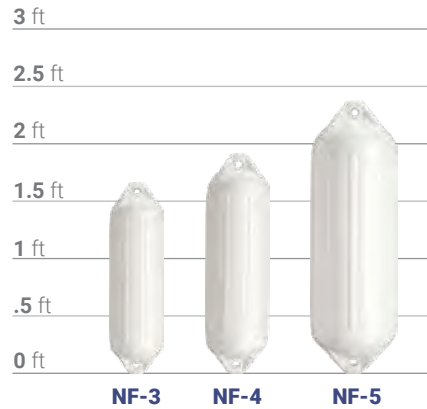

## NF SERIES SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON	BOAT SIZE
				CIRCUMFERENCE	DIAMETER						
<b>NF-3</b>	5.6"	19"	0.625"	17.6"	5.6"	1.3 gal.	2.2 lb.	6	15.1 lb.	2.2 ft <sup>3</sup>	<b>Up to 20'</b>
<b>NF-4</b>	6.4"	21.6"	0.75"	20.1"	6.4"	2.1 gal.	3.0 lb.	6	20.3 lb.	3.0 ft <sup>3</sup>	<b>20'–25'</b>
<b>NF-5</b>	8.9"	26.8"	0.75"	28.0"	8.9"	5.2 gal.	5.4 lb.	4	24.9 lb.	4.7 ft <sup>3</sup>	<b>25'–35'</b>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

## NF SERIES ORDERING INFORMATION

STANDARD COLOR SKUS	BLACK	BLUE	COBALT BLUE	WHITE
	<b>NF-3</b>	23-814-605	53-539-959	48-301-016
<b>NF-4</b>	89-101-410	76-962-808	76-266-280	10-901-104
<b>NF-5</b>	75-105-008	78-624-913	84-227-957	75-273-166

## ADDITIONAL COLORS\*\*

BURGUNDY	CLASSIC RED	FOREST GREEN	GREEN
GREY	NAVY	ORANGE	RED
SAND	TEAL	YELLOW	

\*\*Minimum quantities and additional charges may apply. Please contact Polyform US for details.

# FENDER SIZING



## FENDER SIZING CHART

BOAT SIZE	FENDER SELECTION
<b>Up to 10'</b>	G-1, A-0
<b>10' - 20'</b>	G-2, G-3, S-1, A-0, NF-3
<b>20' - 30'</b>	G-4, G-5, HTM-1, HTM-2, F-1, F-02, F-3, A-1, NF-4, NF-5
<b>30' - 40'</b>	G-6, HTM-3, HTM-4, F-4, F-5, F-6, A-2, LD-2, NF-5
<b>40' - 50'</b>	HTM-4, F-6, A-3, LD-3
<b>50' - 60'</b>	F-7, F-8, A-4
<b>60' - 70'</b>	F-8, F-10, F-11, A-5
<b>70' - up</b>	F-11, F-13, A-5, A-6, A-7

Polyform U.S. Fender Guide is to be used as a general guide. Common sense, as well as an understanding of your boat and mooring conditions, must be considered. The final responsibility has to be taken by the consumer due to the many variables out of Polyform's control.

*Polyform*  
US®


# POLYFORM BUOYS *Made in the USA*




## A SERIES

The original one-piece construction buoy—made the original way  
The #1 buoy in the world

- Even wall thickness for maximum strength and durability
- Polyform's unique vinyl valve system
- Dual valve inflation/deflation system for sizes A-5, A-6 and A-7
- Excellent choice for a rafting fender
- Offered in brilliant, high-visibility colors

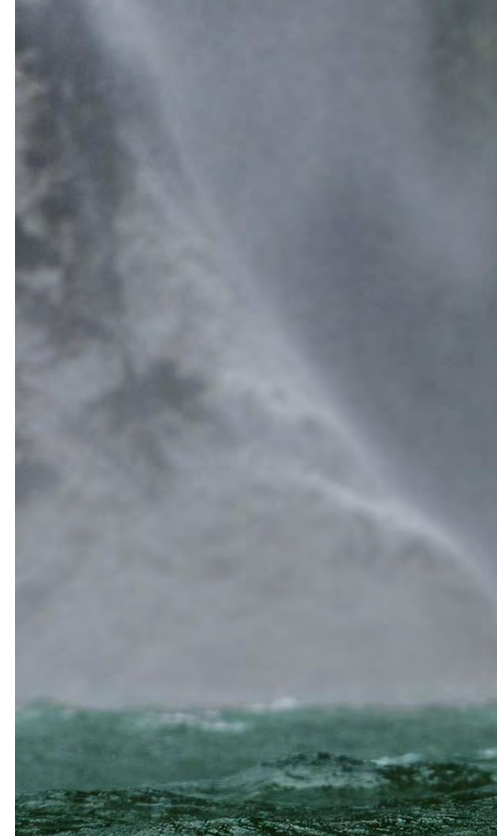

DUAL VALVE SYSTEM on the A-5 through A-7: "AIR IN" for easy inflation. "AIR OUT" for easy deflation and storage.

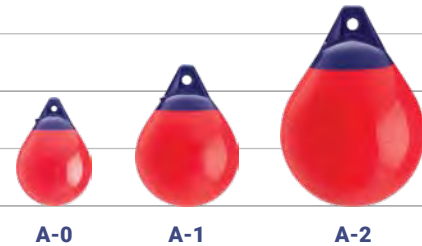


## A SERIES SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
				CIRCUMFERENCE	DIAMETER					
A-0	8"	11.5"	0.6"	25.1"	8.0"	1.6 gal.	1.4 lb.	20	30.0 lb.	2.0 ft <sup>3</sup>
A-1	11"	15"	1.0"	34.6"	11.0"	3.5 gal.	2.6 lb.	10	27.9 lb.	1.7 ft <sup>3</sup>
A-2	14.5"	19.5"	1.125"	45.6"	14.5"	8.2 gal.	4.4 lb.	10	46.5 lb.	2.6 ft <sup>3</sup>
A-3	17"	23"	1.125"	53.4"	17.0"	14.5 gal.	6.8 lb.	10	71.4 lb.	4.0 ft <sup>3</sup>
A-4	20.5"	27"	1.125"	64.4"	20.5"	22.5 gal.	9.5 lb.	10	100.7 lb.	5.7 ft <sup>3</sup>
A-5	27"	36"	1.25"	84.9"	27.0"	47.6 gal.	19.8 lb.	5	107.3 lb.	6.2 ft <sup>3</sup>
A-6	34"	44"	1.5"	106.9"	34.0"	95.1 gal.	34.1 lb.	3	116.2 lb.	9.3 ft <sup>3</sup>
A-7	39"	54"	2.0"	122.6"	39.0"	162 gal.	54.0 lb.	2	121.0 lb.	10.8 ft <sup>3</sup>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.



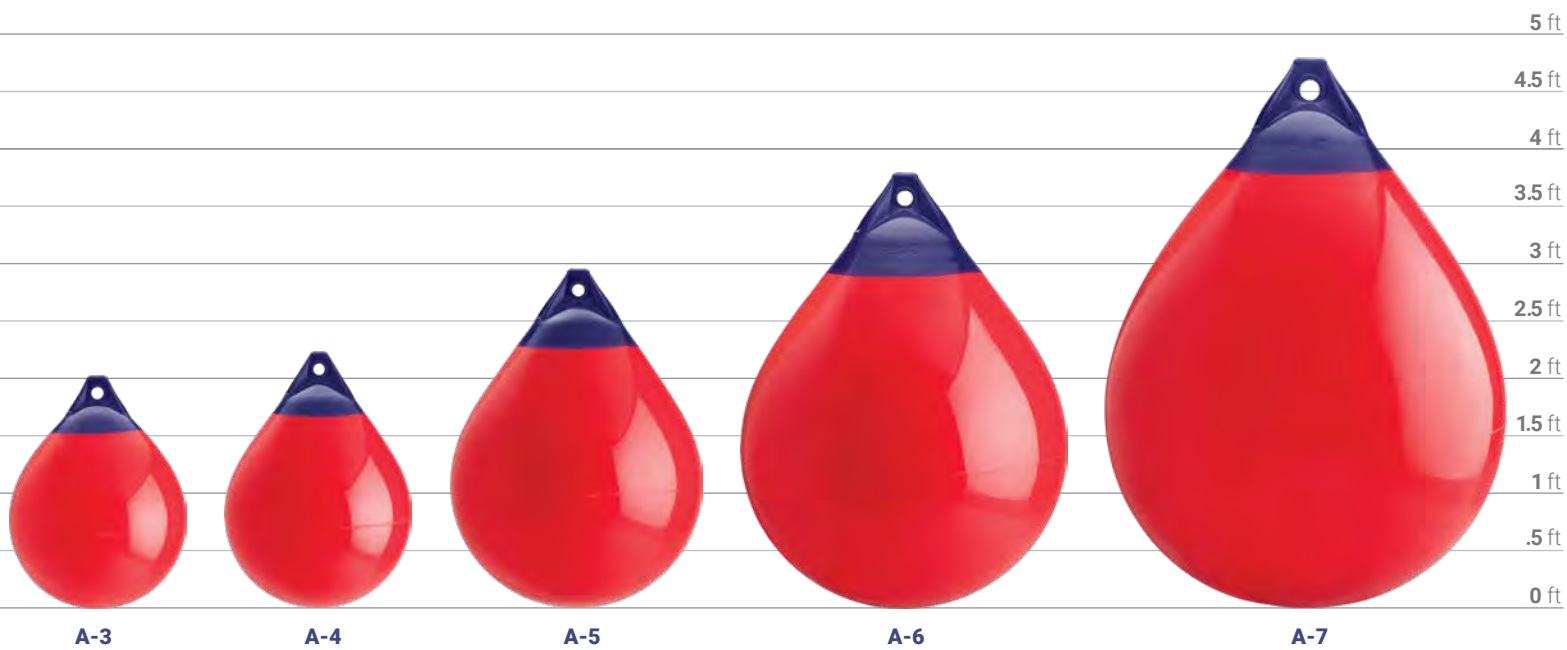

## A SERIES ORDERING INFORMATION

STANDARD COLOR SKUS	BLACK	BLUE	GREEN	LIME	ORANGE	RED	SATURN YELLOW	WHITE	YELLOW
<b>A-0</b>	31-167-257	19-400-520	77-957-683	59-052-112	62-522-460	84-083-844	37-383-894	45-125-827	01-016-782
<b>A-1</b>	93-446-169	77-882-582	64-926-549	76-037-610	64-218-664	11-706-223	49-668-025	13-814-852	50-766-620
<b>A-2</b>	13-445-634	17-045-815	71-832-216	62-281-826	16-691-632	36-649-954	41-517-936	93-589-640	23-133-894
<b>A-3</b>	17-275-659	40-867-783	21-463-314	78-023-381	92-605-310	77-400-354	85-695-557	32-152-798	89-582-642
<b>A-4</b>	99-502-358	63-872-392	17-841-038	85-348-149	96-595-055	25-901-934	02-282-389	27-685-394	70-156-028
<b>A-5</b>	87-645-263	37-701-482	21-584-067	61-970-758	15-906-883	78-597-643	81-116-891	40-498-717	55-066-589
<b>A-6</b>	44-713-972	92-819-301	63-787-228	59-999-112	53-610-256	10-487-121	03-856-061	05-317-866	86-375-504
<b>A-7</b>	96-217-198	64-504-168	99-503-932	36-673-694	89-039-135	08-342-658	55-712-822	74-342-477	19-904-897


# POLYFORM BUOYS *Made in the USA*



## LD SERIES

The original and best selling low drag buoy  
 One piece construction – ONLY one like it  
 Four sizes to choose from  
 Buoy of choice by professional crab and lobster fishermen

- Unique shape makes pot retrieval easier
- LD reduces drag by as much as 80% compared to standard round buoys
- Great choice for any offshore fishing application
- Polyform's vinyl valve system maintains buoy inflation
- Even wall thickness for maximum strength and durability
- Heavy-duty reinforced rope hold

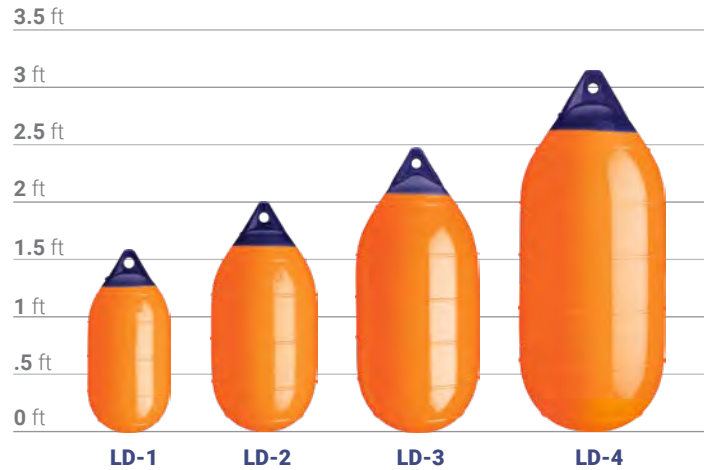

## LD SERIES SPECIFICATIONS

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
				CIRCUMFERENCE	DIAMETER					
<b>LD-1</b>	<b>8.6"</b>	<b>19"</b>	<b>1.0"</b>	<b>27.0"</b>	<b>8.6"</b>	3.0 gal.	3.3 lb.	10	35.0 lb.	2.0 ft <sup>3</sup>
<b>LD-2</b>	<b>11.5"</b>	<b>24"</b>	<b>1.0"</b>	<b>36.1"</b>	<b>11.5"</b>	6.1 gal.	4.7 lb.	10	50.7 lb.	3.2 ft <sup>3</sup>
<b>LD-3</b>	<b>13.5"</b>	<b>29"</b>	<b>1.0"</b>	<b>42.4"</b>	<b>13.5"</b>	10.8 gal.	7.5 lb.	10	80.8 lb.	6.1 ft <sup>3</sup>
<b>LD-4</b>	<b>15.5"</b>	<b>37"</b>	<b>1.0"</b>	<b>48.7"</b>	<b>15.5"</b>	19.2 gal.	11.0 lb.	5	63.3 lb.	6.2 ft <sup>3</sup>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

## LD SERIES ORDERING INFORMATION

STANDARD COLOR SKUS	BLACK	BLUE	GREEN	LIME	ORANGE	RED	SATURN YELLOW	WHITE	YELLOW
	<b>LD-1</b>	93-777-607	79-542-219	42-924-089	39-424-068	03-359-560	46-282-515	91-805-272	47-491-288
<b>LD-2</b>	12-505-556	29-963-728	59-999-842	44-531-904	09-170-845	77-499-866	01-888-104	90-348-244	91-458-905
<b>LD-3</b>	75-779-376	03-681-934	56-718-586	68-441-482	78-815-744	29-804-588	29-037-312	27-229-804	52-865-069
<b>LD-4</b>	39-000-620	60-074-497	15-496-097	76-646-030	52-048-189	60-878-843	68-898-380	53-929-790	67-330-161

Small boat fender  
 AWSA approved boat guide marker  
 Marker for small lobster or crab pots

**S** SERIES



- Even wall thickness for maximum strength and durability
- Reinforced ropehold
- Polyform's unique vinyl valve system



**S SERIES SPECIFICATIONS**

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
				CIRCUMFERENCE	DIAMETER					
<b>S-1</b>	<b>6"</b>	<b>15"</b>	<b>0.5"</b>	<b>18.9"</b>	<b>6.0"</b>	1.6 gal.	1.6 lb.	10	17.0 lb.	1.2 ft <sup>3</sup>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

STANDARD COLOR SKUS	BLACK	BLUE	GREEN	LIME	RED	SATURN YELLOW	WHITE	YELLOW
<b>S-1</b>	<b>31-896-652</b>	<b>49-697-923</b>	<b>63-852-761</b>	<b>30-887-166</b>	<b>63-108-344</b>	<b>30-054-227</b>	<b>15-560-347</b>	<b>55-948-800</b>

IMPORTED



**WS** SERIES

Meets official American Water Ski Association specifications for record capability tournaments  
 Multiple colors to mark both ski and boat courses



- High quality PVC construction
- Reinforced ropehold
- Limited one year warranty

**WS SERIES SPECIFICATIONS**

	DIAMETER	LENGTH	EYE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
				CIRCUMFERENCE	DIAMETER					
<b>WS-1</b>	<b>8"</b>	<b>8.5"</b>	<b>0.375"</b>	<b>25.1"</b>	<b>8.0"</b>	1.6 gal.	0.7 lb.	60	40.1 lb.	1.9 ft <sup>3</sup>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

STANDARD COLOR SKUS	GREEN	ORANGE	RED	YELLOW
<b>WS-1</b>	<b>27-411-191</b>	<b>96-857-540</b>	<b>28-539-331</b>	<b>18-314-701</b>

# POLYFORM MOORING PRODUCTS Made in the USA




## CM SERIES

Soft, inflatable, non-marring mooring buoy protects boat finishes

Choice of vinyl-protected galvanized or stainless steel iron

- Even wall thickness for maximum strength and durability
- Other colors available please contact Polyform U.S.
- Limited three year warranty

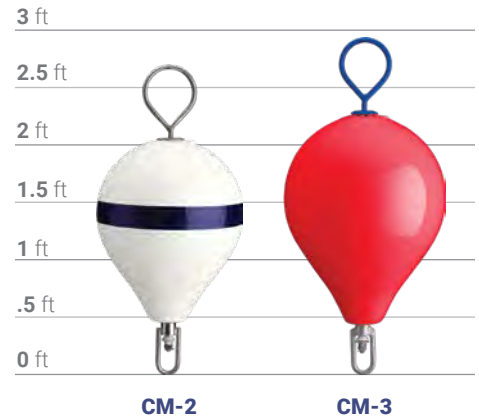


## CM SERIES SPECIFICATIONS

	DIAMETER	LENGTH	IRON LENGTH WITH SHACKLE	TUBE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FOOT PER CARTON
					CIRCUMFERENCE	DIAMETER					
<b>CM-2</b>	<b>13.5"</b>	<b>18"</b>	<b>31"</b>	<b>0.625"</b>	<b>42.4"</b>	<b>13.5"</b>	6.6 gal.	9.2 lb.	1	11.6 lb.	1.9 ft <sup>3</sup>
<b>CM-3</b>	<b>17"</b>	<b>22"</b>	<b>35"</b>	<b>0.625"</b>	<b>53.4"</b>	<b>17.0"</b>	11.8 gal.	12.0 lb.	1	14.4 lb.	1.9 ft <sup>3</sup>

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.

STANDARD COLOR SKUS	RED	WHITE WITH BLUE STRIPE
	<b>CM-2 GALV</b>	<b>35-255-850</b>
<b>CM-2 SS</b>	<b>04-411-454</b>	<b>77-566-577</b>
<b>CM-3 GALV</b>	<b>65-070-333</b>	<b>86-185-752</b>
<b>CM-3 SS</b>	<b>62-652-316</b>	<b>20-570-309</b>

To figure out what size buoy you will need, determine the weight of the chain it must support. All chain has a stated weight per foot. Add another 25% to the total weight for safety. Always use chafing gear where mooring lines run through bow chocks or are likely to contact deck hardware. A thimble on the shackled end will prevent chafe at the buoy.

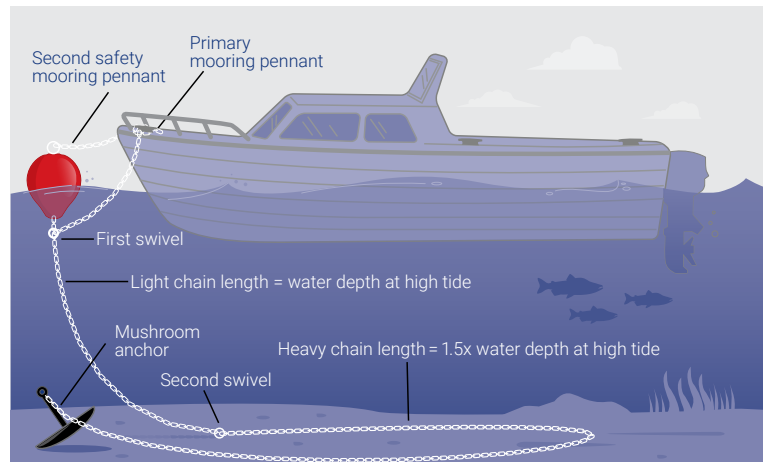


In a hard blow, the holding power of the mooring can be increased by lengthening the mooring pennant. This increases the scope of the mooring providing greater holding power—just be sure to check other boats in the moorage first to ensure you won't foul another moored boat. In adverse conditions, a second mooring pennant can be run to the top eye as a safety in case the primary pennant chafes through or fails. All shackles should be moused to prevent opening. Electricians plastic tie wraps are an excellent means of securing a shackle.

# POLYFORM MOORING PRODUCTS


The original inflatable plastic bar & mooring buoy  
 Can be used in a variety of applications  
 Even wall thickness and reinforced flexible center tube  
 for maximum strength and durability

## CC SERIES

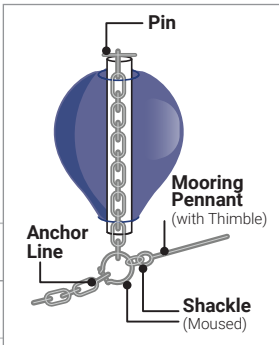

**When using the CC Series as a mooring buoy, please follow these simple instructions to achieve the maximum use and durability of this product:**

- 1) The CC Series has a flexible center tube. If you use a chain, you must first insert a rigid PVC pipe. DO NOT inflate the buoy until you have inserted the pipe.
- 2) Lubricate with oil both the tube and the pipe prior to inserting. Make the length of the pipe so that you have 3 inches extending beyond the top and bottom of the buoy.
- 3) Run a suitable size pin for your load through the top of the pipe and attach the shackle to the chain at the bottom of the buoy.

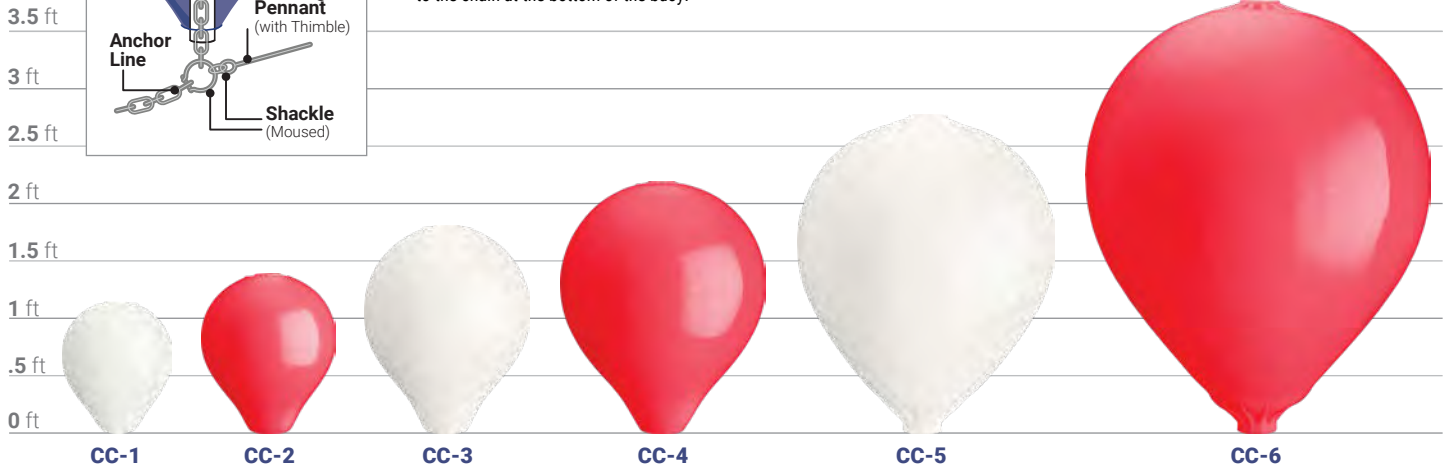

### CC SERIES SPECIFICATIONS

	DIAMETER	LENGTH	TUBE DIAMETER	MAXIMUM INFLATION*		VOLUME	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FOOT PER CARTON	STANDARD COLOR SKUS	RED	WHITE
				CIRCUMFERENCE	DIAMETER						CC-1	CC-2	
CC-1	10.5"	13"	1.5"	33.0"	10.5"	3.1 gal.	3.7 lb.	10	40.4 lb.	4.0 ft <sup>3</sup>	CC-1	33-359-080	52-119-654
CC-2	14"	16.5"	2.0"	44.0"	14.0"	6.1 gal.	5.5 lb.	10	60.7 lb.	5.7 ft <sup>3</sup>	CC-2	51-072-194	33-754-099
CC-3	17"	21"	2.0"	53.4"	17.0"	12.6 gal.	7.9 lb.	4	35.1 lb.	3.2 ft <sup>3</sup>	CC-3	05-192-965	29-558-783
CC-4	20"	25.5"	2.0"	62.9"	20.0"	18.3 gal.	10.5 lb.	4	50.3 lb.	6.2 ft <sup>3</sup>	CC-4	52-864-789	38-727-323
CC-5	27"	32.8"	3.0"	84.9"	27.0"	44.9 gal.	23.1 lb.	2	54.5 lb.	6.2 ft <sup>3</sup>	CC-5	68-514-822	42-735-496
CC-6	32"	43"	3.0"	100.6"	32.0"	92.5 gal.	35.2 lb.	2	84.3 lb.	9.3 ft <sup>3</sup>	CC-6	92-701-674	61-556-261

\*Maximum inflation pressure is 2 psi, over-inflation voids warranty.


## PG SERIES

### HEAVY DUTY DOCK PROTECTION

Reinforcement ribs for added strength and protection  
 Formulated to stay soft and resist UV breakdown


- Easy mounting
- Available in white only
- Limited 3 year warranty

## DOCK GUARDS

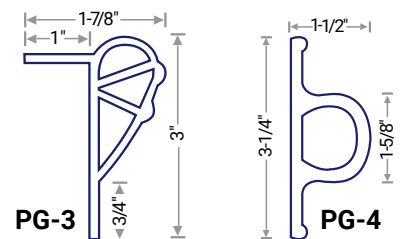

### DOCK GUARD ORDERING DETAILS

ITEM NUMBER	SKU	DESCRIPTION	UNIT DIMENSIONS	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
PG-3	60-516-634	3" x 10' Extrusion	10' long x 3" tall	6.0 lb.	10	70.0 lb.	3.3 ft <sup>3</sup>
PG-4	07-506-050	3.25" x 6' Extrusion	6' long x 3.25" tall	6.25 lb.	8	50.0 lb.	2.2 ft <sup>3</sup>

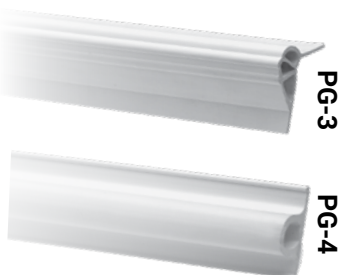

# FENDER COVERS



## A SERIES FENDER COVERS



# EFC SERIES

## ELITE FENDER COVERS

Hand-crafted with heavy duty polyester fabric for durability

Sun resistant, abrasion resistant and water resistant

IMPORTED

- Washable
- Custom fit for a tailored look
- Tough 1/4" line drawstring closure
- Quick and easy installation
- All sizes available in black with gold embroidered logo or blue with silver embroidered logo using Lurex® yarn
- Limited three year warranty

## FENDER COVER ORDERING DETAILS

ITEM NUMBER	BLACK SKU	BLUE SKU	FITS	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
<b>EFC-A1</b>	22-834-038	01-811-567	<b>A-1</b>	0.6 lb.	12	8.0 lb.	.09 ft <sup>3</sup>
<b>EFC-A2</b>	46-549-153	44-268-212	<b>A-2</b>	0.8 lb.	12	10.0 lb.	0.8 ft <sup>3</sup>
<b>EFC-A3</b>	34-943-210	33-618-184	<b>A-3</b>	1.0 lb.	12	12.5 lb.	1.1 ft <sup>3</sup>
<b>EFC-A4</b>	45-064-271	14-390-825	<b>A-4</b>	1.2 lb.	12	15.0 lb.	1.2 ft <sup>3</sup>
<b>EFC-A5</b>	42-103-703	86-240-044	<b>A-5</b>	2.3 lb.	12	26.0 lb.	2.8 ft <sup>3</sup>
<b>EFC-A6</b>	60-842-692	24-087-307	<b>A-6</b>	2.5 lb.	6	19.0 lb.	1.9 ft <sup>3</sup>
<b>EFC-A7</b>	69-850-601	40-625-971	<b>A-7</b>	5.0 lb.	6	32.0 lb.	2.7 ft <sup>3</sup>
<b>EFC-1</b>	15-438-475	37-158-571	<b>G-4, F-1, HTM-1, NF-4</b>	0.6 lb.	12	8.0 lb.	0.8 ft <sup>3</sup>
<b>EFC-02</b>	25-627-379	16-544-297	<b>F-02</b>	0.7 lb.	12	10.0 lb.	0.8 ft <sup>3</sup>
<b>EFC-2</b>	53-300-941	36-712-727	<b>G-5, F-2, HTM-2, NF-5</b>	0.7 lb.	12	10.0 lb.	0.8 ft <sup>3</sup>
<b>EFC-3</b>	96-814-497	38-460-585	<b>G-6, HTM-3</b>	1.1 lb.	12	14.5 lb.	1.3 ft <sup>3</sup>
<b>EFC-03</b>	93-216-025	58-370-518	<b>F-3</b>	0.8 lb.	12	11.0 lb.	0.9 ft <sup>3</sup>
<b>EFC-4</b>	04-175-569	25-682-925	<b>HTM-4</b>	1.3 lb.	12	19.0 lb.	1.6 ft <sup>3</sup>
<b>EFC-04</b>	62-951-285	47-802-627	<b>F-4</b>	0.9 lb.	12	14.0 lb.	1.5 ft <sup>3</sup>
<b>EFC-5</b>	39-200-210	31-507-826	<b>F-5</b>	0.9 lb.	12	12.7 lb.	1.1 ft <sup>3</sup>
<b>EFC-6</b>	37-527-092	76-291-741	<b>F-6</b>	1.2 lb.	12	16.8 lb.	1.5 ft <sup>3</sup>
<b>EFC-7</b>	60-265-579	31-667-694	<b>F-7</b>	1.4 lb.	12	19.5 lb.	1.7 ft <sup>3</sup>
<b>EFC-8</b>	86-362-790	80-109-194	<b>F-8</b>	2.1 lb.	12	24.5 lb.	1.6 ft <sup>3</sup>
<b>EFC-10</b>	05-299-054	66-801-646	<b>F-10</b>	2.1 lb.	12	24.5 lb.	2.3 ft <sup>3</sup>
<b>EFC-11</b>	67-293-335	20-080-802	<b>F-11</b>	3.0 lb.	12	35.5 lb.	3.2 ft <sup>3</sup>
<b>EFC-13</b>	73-048-325	69-937-114	<b>F-13</b>	4.4 lb.	6	34.8 lb.	1.9 ft <sup>3</sup>

## F SERIES FENDER COVERS



5 ft  
4.5 ft  
4 ft  
3.5 ft  
3 ft  
2.5 ft  
2 ft  
1.5 ft  
1 ft  
.5 ft  
0 ft



**EFC-A3**  
A-3

**EFC-A4**  
A-4

**EFC-A5**  
A-5

**EFC-A6**  
A-6

**EFC-A7**  
A-7

**G SERIES**

**HTM SERIES**

**NF SERIES**

3 ft  
2.5 ft  
2 ft  
1.5 ft  
1 ft  
.5 ft  
0 ft



**EFC-1**  
G-4

**EFC-2**  
G-5

**EFC-3**  
G-6



**EFC-1**  
HTM-1

**EFC-2**  
HTM-2

**EFC-3**  
HTM-3

**EFC-4**  
HTM-4



**EFC-1**  
NF-4

**EFC-2**  
NF-5

6.5 ft  
6 ft  
5.5 ft  
5 ft  
4.5 ft  
4 ft  
3.5 ft  
3 ft  
2.5 ft  
2 ft  
1.5 ft  
1 ft  
.5 ft  
0 ft



**EFC-5**  
F-5

**EFC-6**  
F-6

**EFC-7**  
F-7

**EFC-8**  
F-8

**EFC-10**  
F-10

**EFC-11**  
F-11

**EFC-13**  
F-13

# FENDER COVERS



**FF** SERIES

## FENDER FITS COVERS

Hand-crafted with high bulk acrylic yarn for durability  
Sun resistant, abrasion resistant and water resistant

IMPORTED

- Washable
- Custom fit for a tailored look
- Drawstring closure
- Quick and easy installation
- All sizes available in black, green or navy
- Limited three year warranty

### FENDER FITS COVER ORDERING DETAILS

ITEM NUMBER	BLACK SKU	GREEN SKU	NAVY SKU	FITS	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
FENDER FITS-A-4	29-125-762	98-449-800	96-068-358	<b>A-4</b>	1.8lb.	5	9.6 lb.	1.6 ft <sup>3</sup>
FENDER FITS-A-5	48-481-253	76-982-349	82-510-706	<b>A-5</b>	2.3lb.	4	11.2 lb.	1.6 ft <sup>3</sup>
FENDER FITS-A-6	37-915-170	25-719-660	07-815-415	<b>A-6</b>	3.2lb.	3	10.8 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-1/G-4	08-865-241	42-334-304	24-291-093	<b>F-1, G-4</b>	0.3lb.	12	4.4 lb.	0.7 ft <sup>3</sup>
FENDER FITS-F-10	17-309-293	31-878-238	67-452-043	<b>F-10</b>	2.5lb.	4	11.5 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-11	37-423-308	87-893-985	07-645-831	<b>F-11</b>	3.3lb.	3	11.2 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-2	89-180-618	07-243-755	20-966-006	<b>F-2</b>	0.4lb.	10	4.1 lb.	0.7 ft <sup>3</sup>
FENDER FITS-F-3/G-5	45-335-170	62-714-505	63-420-364	<b>F-3, G-5</b>	0.5lb.	8	4.0 lb.	0.7 ft <sup>3</sup>
FENDER FITS-F-4	75-020-595	83-878-924	08-959-170	<b>F-4</b>	1.4lb.	7	10.2 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-5	75-656-025	42-010-951	42-181-854	<b>F-5</b>	1.0lb.	8	9.0 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-6	87-380-225	64-503-505	63-554-545	<b>F-6</b>	1.3lb.	7	10.6 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-7	37-368-101	32-224-401	84-622-686	<b>F-7</b>	1.6lb.	7	11.6 lb.	1.6 ft <sup>3</sup>
FENDER FITS-F-8	36-467-649	80-880-053	21-571-146	<b>F-8</b>	2.0lb.	5	10.9 lb.	1.6 ft <sup>3</sup>
FENDER FITS-HTM-2	56-609-912	27-533-153	10-258-438	<b>HTM-2</b>	0.4lb.	9	4.2 lb.	0.7 ft <sup>3</sup>
FENDER FITS-HTM-3	82-247-937	02-369-677	12-761-904	<b>HTM-3</b>	1.2lb.	8	10.7 lb.	1.6 ft <sup>3</sup>
FENDER FITS-HTM-4	25-876-965	04-225-792	78-229-078	<b>HTM-4</b>	1.5lb.	6	10.2 lb.	1.6 ft <sup>3</sup>

F SERIES



FF-F-1  
F-1



# A SERIES FENDER COVERS




*All sizes available in black, green or navy*


## G SERIES



## HTM SERIES

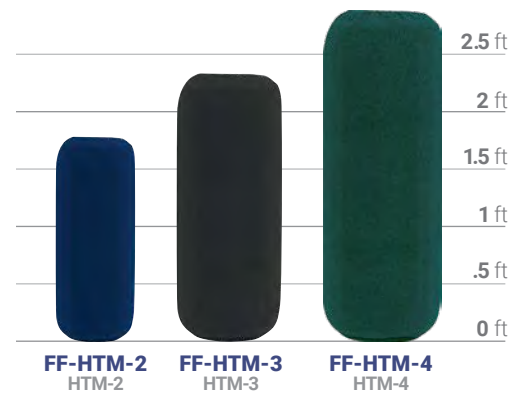

# FENDER COVERS

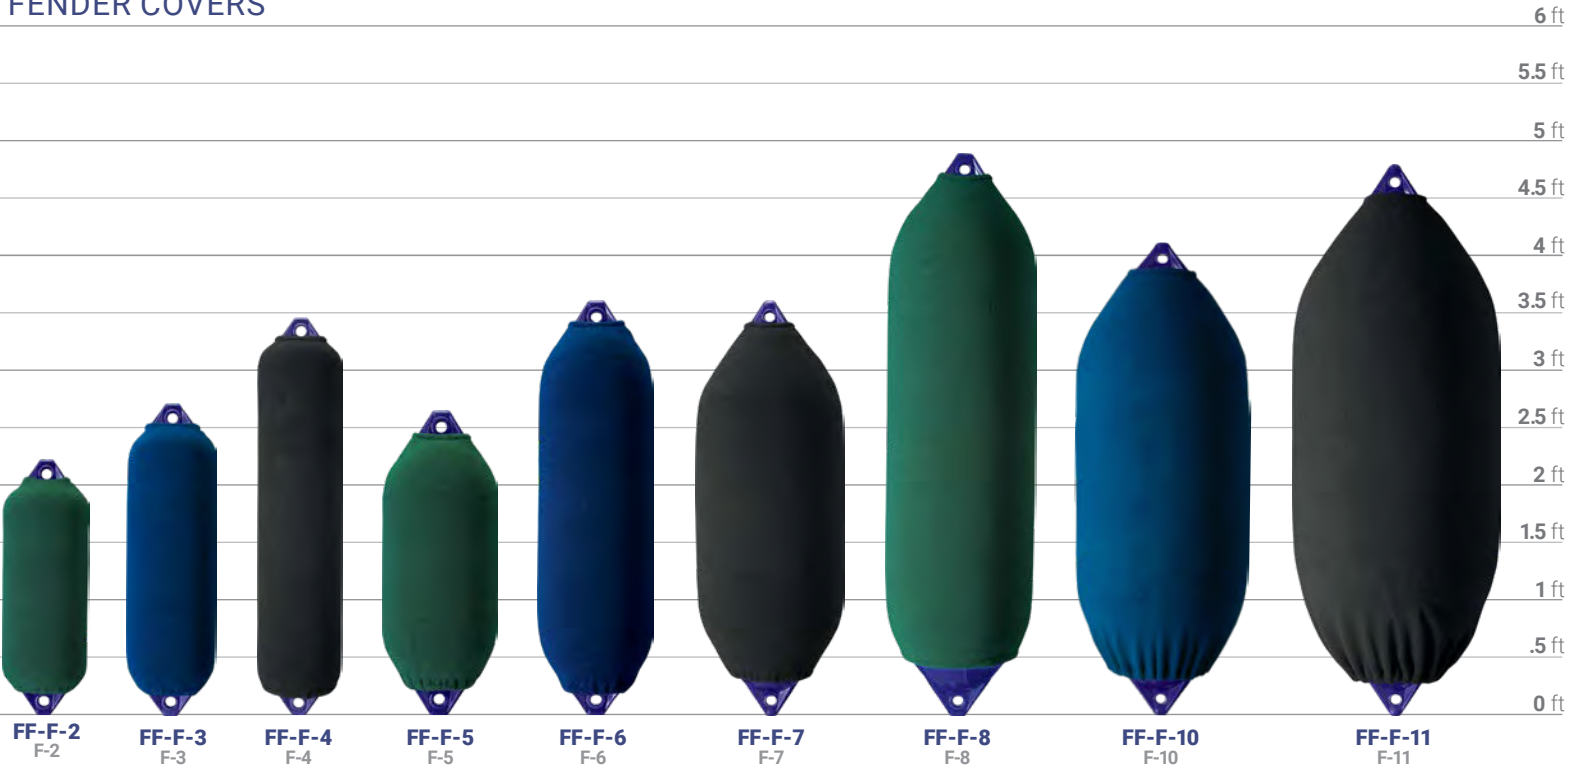

# FENDER HOLDERS



## TFR SERIES

### TRUE FIT FENDER HOLDERS

Modular system fits rails from 7/8" to 1-1/4" at any height or any angle. Because of its modular design, you can add on as your needs change.

IMPORTED



- Available as individual pieces or as a kit for a two or three holder assembly (complete with connecting hardware for 7/8" to 1" rails)
- Versatile system for easy installation
- Durable construction for years of service
- Made from 304 stainless steel wire
- Limited 3 year warranty



TFR-402/TFR-404 Swivel Connector



TFR-403 Parallel Connector



#### TWO HOLDER KITS

Include three TFR-402 and one pair of TFR-403




#### THREE HOLDER KITS

Include four TFR-402 and two pair of TFR-403

### FENDER HOLDER KIT ORDERING DETAILS

INSIDE DIAMETER	LENGTH	ITEM NUMBER	SKU	DESCRIPTION	FITS	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
6.75"	18"	TFR-170-2	30-423-492	2 Holder Kit 6.75" Inside Diameter	F-1, G-4, HTM-1, NF-4	2.5 lb.	1	3.5 lb.	0.9 ft <sup>3</sup>
		TFR-170-3	49-463-600	3 Holder Kit 6.75" Inside Diameter	F-1, G-4, HTM-1, NF-4	3.9 lb.	1	4.9 lb.	0.9 ft <sup>3</sup>
9"	19"	TFR-230-2	81-766-850	2 Holder Kit 9" Inside Diameter	F-2, G-5, HTM-2, NF-5	3.2 lb.	1	4.4 lb.	1.6 ft <sup>3</sup>
		TFR-230-3	91-940-723	3 Holder Kit 9" Inside Diameter	F-2, G-5, HTM-2, NF-5	4.4 lb.	1	5.6 lb.	1.6 ft <sup>3</sup>
12"	25"	TFR-280-2	28-785-655	2 Holder Kit 12" Inside Diameter	F-5, G-6, HTM-3	3.7 lb.	1	5.8 lb.	3.0 ft <sup>3</sup>
		TFR 280-3	19-270-517	3 Holder Kit 12" Inside Diameter	F-5, G-6, HTM-3	5.8 lb.	1	7.5 lb.	3.0 ft <sup>3</sup>

## TFR SERIES FENDER HOLDERS

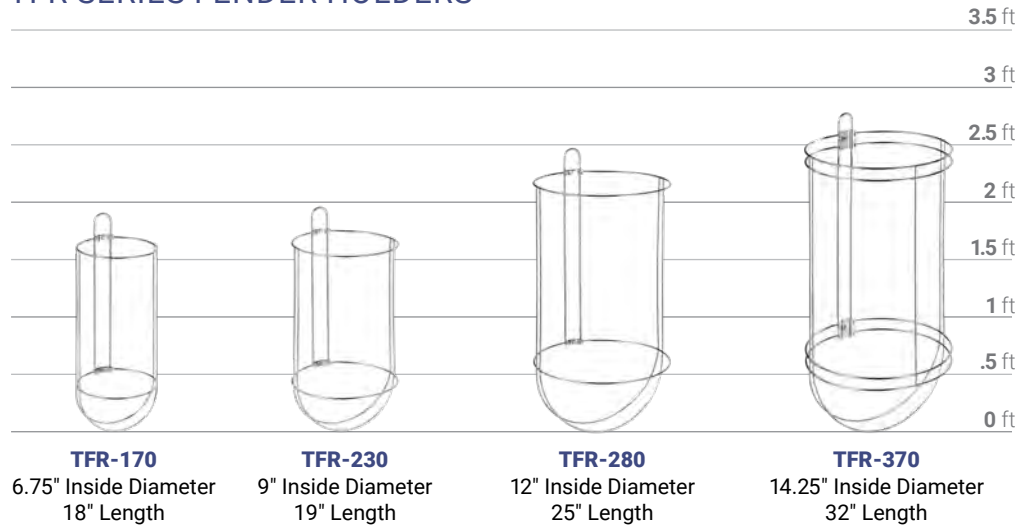

## INDIVIDUAL FENDER HOLDER ORDERING DETAILS

ITEM NUMBER	SKU	DESCRIPTION	FITS	UNIT WEIGHT	UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
<b>TFR-170</b>	<b>54-878-358</b>	6.75" Inside Diameter Fender Holder	<b>F-1, G-4, HTM-1, NF-4</b>	1.0 lb.	12	14.0 lb.	2.5 ft <sup>3</sup>
<b>TFR-230</b>	<b>77-347-961</b>	9" Inside Diameter Fender Holder	<b>F-2, G-5, HTM-2, NF-5</b>	1.0 lb.	12	15.0 lb.	5.5 ft <sup>3</sup>
<b>TFR-280</b>	<b>03-170-882</b>	12" Inside Diameter Fender Holder	<b>F-5, G-6, HTM-3</b>	1.7 lb.	12	23.0 lb.	5.5 ft <sup>3</sup>
<b>TFR-370</b>	<b>50-927-179</b>	14.25" Inside Diameter Tall Fender Holder	<b>HTM-4</b>	3.1 lb.	2	8.6 lb.	4.9 ft <sup>3</sup>
<b>TFR-402</b>	<b>74-658-191</b>	Swivel Connector for 7/8" – 1" Rail	<b>3/4" – 7/8" Rails</b>	0.5 lb.	12	3.1 lb.	0.2 ft <sup>3</sup>
<b>TFR-403</b>	<b>01-642-002</b>	Parallel Connector (pair)	<b>All Holders</b>	0.2 lb.	12	2.3 lb.	0.1 ft <sup>3</sup>
<b>TFR-404</b>	<b>09-974-865</b>	Swivel Connector for 1-1/4" Rail	<b>1" – 1-1/4" Rails</b>	0.5 lb.	12	3.4 lb.	0.2 ft <sup>3</sup>

**SINGLE HOLDERS DO NOT COME WITH MOUNTING HARDWARE.** TFR-402 and TFR 404 sold separately.



# POLYFORM ACCESSORIES

## #10 Inflation Adapter

Inflation adapter is specifically designed to fit all Polyform buoys and fenders.

SKU: **22-689-786**



## #20 Patch Kit

Very successful when used for repairing small punctures. Large cuts, or repairs to buoys and fenders used in extremely severe applications may not patch successfully. If there is a question or concern regarding repairs, contact your local Polyform representative or call the factory direct.

SKU: **70-650-169**



## #30 Hand Pump

Specially designed for inflating Polyform products. Can also be used on other inflatable products such as air mattresses and toys. Limited three year warranty.

SKU: **62-078-262**  
IMPORTED



## #31 Mini Pump

When combined with our inflation adapter, it's a handy pump for quick air additions to all Polyform products. Limited three year warranty.

SKU: **34-213-984**

IMPORTED



## #42 Marking Ink

This product permanently fuses to the vinyl surface and withstands ultraviolet rays and salt water. Use of a product other than Polyform's may void the warranty. 1 liter available in blue ink [#42].

SKU: **75-528-600**

IMPORTED



## #75 Line Holder

This versatile line holder keeps line and cords neat and easily accessible. Made from UV resistant vinyl with stainless steel hardware. Limited 3 year warranty.

SKU: **01-331-281**

IMPORTED




## POLYFORM SHACKLES #50/52 Galvanized

A handy addition to our A, F and LD Series products for improved performance in tough applications. PVC bushing distributes load over entire rope hold area for maximum performance and longevity. Choose between a 1-1/4" [#50] or 1" [#52] bushing. Load rated at 5,000 lbs. Limited 3 year warranty.

IMPORTED


	MATERIAL	BUSHING	FITS (FENDERS/BUOYS)
<b>50</b>	Galvanized	1.25"	A-2, A-3, A-4
<b>52</b>	Galvanized	1"	A-1, F-2, F-3, F-4, F-5, F-6, F-7, F-8, F-10, F-11, LD-1, LD-2, LD-3, LD-4

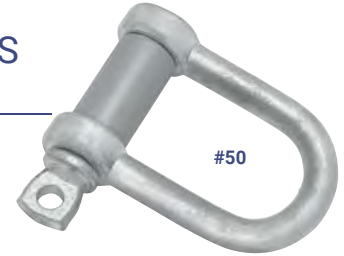

SKU: **38-557-414**



SKU: **80-414-298**

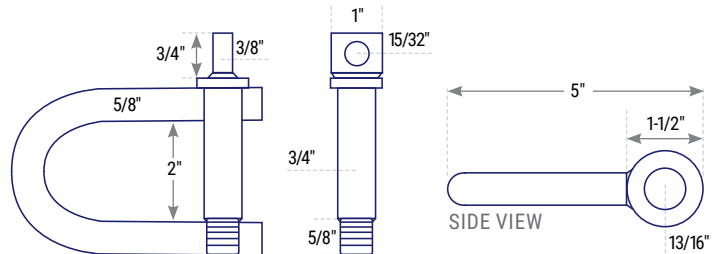

## ACCESSORY ORDERING DETAILS

ITEM NUMBER	SKU	DESCRIPTION	UNIT WEIGHT	RETAIL PACKAGE DIMENSIONS			UNITS PER CARTON	CARTON WEIGHT	CUBIC FEET PER CARTON
				LENGTH	WIDTH	DEPTH			
<b>10</b>	<b>22-689-786</b>	Inflation Adapter	0.01 lb.	6"	4"	0.5"	50	1.0 lb.	.01 ft <sup>3</sup>
<b>20</b>	<b>70-650-169</b>	Repair Kit	0.1 lb.	6"	4"	1"	12	2.0 lb.	0.1 ft <sup>3</sup>
<b>30</b>	<b>62-078-262</b>	Pump	0.8 lb.	23"	3"	3"	6	6.2 lb.	0.4 ft <sup>3</sup>
<b>31</b>	<b>34-213-984</b>	Mini Pump	0.1 lb.	6"	1.5"	1.5"	15	2.0 lb.	0.2 ft <sup>3</sup>
<b>42</b>	<b>75-528-600</b>	Blue Marking Ink	2.4 lb.	5.5"	4.5"	4.5"	4	10.5 lb.	0.4 ft <sup>3</sup>
<b>50</b>	<b>33-957-400</b>	Galvanized Shackle with 1.25" Bushing	1.5 lb.	5.5"	5"	1.5"	10	17.2 lb.	0.9 ft <sup>3</sup>
<b>52</b>	<b>21-554-162</b>	Galvanized Shackle with 1" Bushing	1.5 lb.	5.5"	5"	1.5"	10	17.2 lb.	0.9 ft <sup>3</sup>
<b>70</b>	<b>56-755-204</b>	Fender Adjuster	0.2 lb.	10"	4"	3"	12	4.5 lb.	0.2 ft <sup>3</sup>
<b>75</b>	<b>01-331-281</b>	Line Holder	0.1 lb.	14"	3"	1"	12	2.5 lb.	0.2 ft <sup>3</sup>

## Shackle Parts

### Bushings

1-INCH for use on Polyform #52 shackles.  
SKU: **16-543-899**



1.25-INCH for use on Polyform #50 shackles.  
SKU: **68-405-168**



## Valve & Inflation Parts

### Valve Screw

For use on all Polyform buoys and fenders (except WS-1).  
Package of 10.  
SKU: **81-818-792**



### Mini Pump

Use with included Inflation Adapter to add air to Polyform products.  
SKU: **34-213-984**



### Inflation Adapter

SKU: **22-689-786**

### Hand Pump

SKU: **62-078-262**



## Mooring Buoy Parts (CM-2/CM-3)

### Swivel Shackle

GALVANIZED. For use on mooring iron.  
SKU: **99-711-284**



### Swivel Teflon Insert

For use on mooring iron swivel shackle.  
SKU: **56-231-612**



### Swivel Washers

GALVANIZED. For use on mooring iron swivel shackle. Set of 2.  
SKU: **18-839-156**



### Jam Nuts

GALVANIZED. For use on mooring iron bottom swivel. Set of 2.  
SKU: **59-016-493**



### Cotter Pin

GALVANIZED. For use on mooring iron bottom swivel.  
SKU: **16-894-108**




### CM-2 Mooring Iron

GALVANIZED with protective vinyl coating. Without bottom swivel.  
SKU: **81-828-798**

### CM-3 Mooring Iron

GALVANIZED with protective vinyl coating. With bottom swivel.  
SKU: **63-808-223**

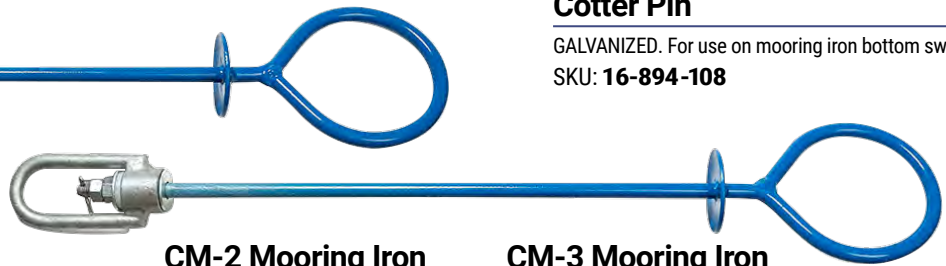

### CM-2 Mooring Iron WITH SWIVEL ASSEMBLY

GALVANIZED with protective vinyl coating. With bottom swivel.  
SKU: **65-058-471**

### CM-3 Mooring Iron WITH SWIVEL ASSEMBLY

GALVANIZED with protective vinyl coating. With bottom swivel.  
SKU: **98-151-827**

## Fender Holder Parts (TFR Series)

### TFR U-Bars

With screws.

#### TFR-170

SKU: **43-232-775**

#### TFR-230

SKU: **23-601-424**

#### TFR-280

SKU: **42-868-653**

#### TFR-370

SKU: **79-937-595**



### U-Bar Screws

For use with all TFR U-Bars. Package of 2.  
SKU: **67-381-202**



### TFR-402 Long Screws

For use with TFR-402 swivel connectors.  
Package of 4 with nuts.  
SKU: **40-650-167**



### TFR-404 Long Screws

For use with TFR-404 swivel connectors.  
Package of 4 with nuts.  
SKU: **21-548-578**



### Long Screw Nut

For use with TFR-402 & TFR-404 swivel connectors.  
SKU: **79-694-744**



### TFR-403 Screw/Nut

For use with TFR-403 parallel connectors.  
SKU: **47-212-053**



### TFR-402/404 Screw/Nut

For use with TFR-402 & TFR-404 swivel connectors.  
SKU: **41-058-770**



### TFR-402 Swivel Disk

For use with TFR-402 swivel connectors.  
SKU: **03-298-797**



### TFR-404 Swivel Disk

For use with TFR-404 swivel connectors.  
SKU: **80-441-749**



# INFLATION GUIDE



Several types of air source may be used to inflate your Polyform products:

- Polyform # 30 hand pump
- Other hand or foot operated pumps
- Air compressor
- Service station air pump



Use the Polyform inflation adapter with any standard air pump

**STEP 1:** Remove the white plastic screw from the valve (located near the ropehold).

**STEP 2:** If you are using a gas station or portable air compressor, set your gauge at 2 PSI. Do not go beyond this setting. Insert the inflation adapter in the valve opening and apply the nozzle to the adapter and depress to start the air flowing. If you are using a hand or foot operated pump, insert the inflation adapter into the nozzle first. The adapter is threaded for your convenience.



**STEP 3:** Fill the Polyform fender or buoy until the walls are fully expanded. The best way to check that is to measure the circumference of the particular product and match the chart

measurement. You should also be able to easily push with your thumb and depress the wall 1/4 inch.

**STEP 4:** After filling the product to the correct size, remove the pump (and inflation adapter if used) and replace the white screw. Remember that you are screwing a plastic screw into plastic threads. The screw will come to a stop when the screw head is flush with the top of the valve casing. Do not force the screw past this point or damage to the valve will occur. Only when the white valve screw is completely seated in the valve as described above is the fender or buoy completely sealed.

**NOTE:** Do not use power drills/drivers to tighten. The torque can easily drive the screw through the valve.

Polyform products are designed to be inflated to 2.1 lbs/0,15 bar of pressure. When inflating without a pressure gauge, fill the buoy or fender until the walls are fully expanded, but make certain you can depress the wall at least 1/4 inch with light hand pressure. Measure the circumference and compare it with the inflation chart for proper pressure. Over inflation will reduce the performance of the product and may cause premature failure. Over inflation voids the warranty.

## CIRCUMFERENCE INFLATION CHART

A SERIES Max. Circumference		
A-0	25.1 in.	63.8 cm
A-1	34.5 in.	87.7 cm
A-2	45.5 in.	115.6 cm
A-3	53.4 in.	135.6 cm
A-4	64.4 in.	163.5 cm
A-5	84.8 in.	215.3 cm
A-6	106.8 in.	271.2 cm
A-7	122.5 in.	311.0 cm

CC SERIES Max. Circumference		
CC-1	33.0 in.	83.7 cm
CC-2	44.0 in.	111.7 cm
CC-3	53.4 in.	135.6 cm
CC-4	62.8 in.	159.5 cm
CC-5	84.8 in.	215.3 cm
CC-6	100.5 in.	255.2 cm

CM SERIES Max. Circumference		
CM-2	42.4 in.	107.7 cm
CM-3	53.4 in.	135.6 cm

F SERIES Max. Circumference		
F-1	18.8 in.	47.9 cm
F-02	23.6 in.	59.8 cm
F-2	25.7 in.	65.4 cm
F-3	25.7 in.	65.4 cm
F-4	26.7 in.	67.8 cm
F-5	34.5 in.	87.7 cm
F-6	34.5 in.	87.7 cm
F-7	47.1 in.	119.6 cm
F-8	47.1 in.	119.6 cm
F-10	56.5 in.	143.6 cm
F-11	66.6 in.	169.1 cm
F-13	91.1 in.	231.3 cm

G SERIES Max. Circumference		
G-3	17.3 in.	43.9 cm
G-4	20.4 in.	51.8 cm
G-5	27.6 in.	70.2 cm
G-6	34.5 in.	87.7 cm

HTM SERIES Max. Circumference		
HTM-1	19.8 in.	50.2 cm
HTM-2	26.7 in.	67.8 cm
HTM-3	33.0 in.	83.7 cm
HTM-4	42.4 in.	107.7 cm

LD SERIES Max. Circumference		
LD-1	27.0 in.	68.6 cm
LD-2	36.1 in.	91.7 cm
LD-3	42.4 in.	107.7 cm
LD-4	48.7 in.	123.6 cm

NF SERIES Max. Circumference		
NF-3	17.6 in.	44.7 cm
NF-4	20.1 in.	51.0 cm
NF-5	27.9 in.	71.0 cm

S SERIES Max. Circumference		
S-1	18.8 in.	47.9 cm

WS SERIES Max. Circumference		
WS-1	25.1 in.	63.8 cm

Note: When inflating with an air compressor, set the psi to 2 lbs. pressure.