



ENGLISH:

Battery Installation – See Figure 1

3AAA

- Alkaline (LR03)
- Lithium (L92)
- Rechargeable NiCad or NiMH

Princeton Tec cares about the environment and recommends recycling batteries.

Observe proper battery polarity. Improper installation of the batteries will damage the light and void the warranty.

WARNING ⚠

- Never mix fresh and used batteries.
- Never mix different battery brands or chemistry types.
- Always remove drained batteries immediately.
- Remove batteries during long periods of storage.

Note: Lithium batteries offer extended constant brightness time, extreme cold weather performance, and lighter weight. Rechargeable NiCad or NiMH batteries may result in reduced brightness due to lower nominal voltage.

The Vizz batter compartment has a waterproof seal. It is important to keep this seal free from dirt and away from harsh chemicals in order to preserve waterproof integrity. Inspect the seal every time batteries are changed. If dirt is present, wipe gently with a damp cotton swap and mild soap until dirt is removed.

Switch Operation

– See Figure 2

Troubleshooting




If the Vizz fails to light:

- Check the batteries for proper installation.
- Replace batteries if proper installation is confirmed.
- Check circuit board for water (the seal may have been compromised by improper rear cover installation or dirty seal). The light will resume normal operation once the water is shaken or blown out and the light is left open until completely dry. If the light has been contaminated with salt water, flush the unit with fresh water and dry as described above.

Figure 1 – Battery Replacement



Figure 2 – Switch Operation

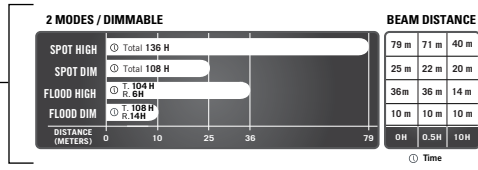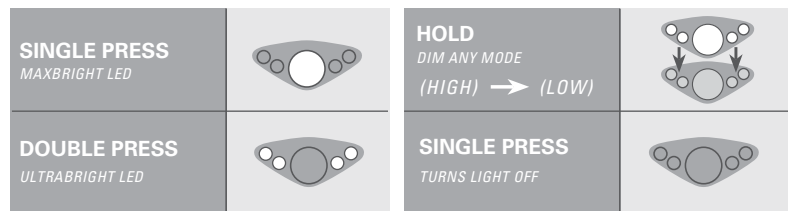

- Princeton Tec calculates total burn time as the time it takes for the light source to produce a minimum of 0.25 lux at 2 meters. 0.25 lux is about the equivalent of a full moon on a clear night.