



OPTICS & SIGHTS



TABLE OF CONTENTS

COMPANY

> Mission & Values	4
> The Trijicon® Difference	6
> Military & Law Enforcement	8
> Shooting & Hunting	10

ACOG®

> ACOG®	12
> ACOG®/RMR® Combo	26

REFLEX SIGHTS

> RMR®	34
> MRO®	42
> SRS®	48
> Reflex	54
> MGRS®	60

IRON SIGHTS

> Bright & Tough™ Night Sights	68
> Bright & Tough™ Suppressor Night Sights	72
> HD™ Night Sights	76
> HD XR™ Night Sights	80
> Fiber Sights	84
> TrijiDot®	88

VARIABLE POWER

> AccuPoint®	94
> AccuPower®	106
> VCOG®	116

ELECTRO OPTICS

> REAP-IR®	124
> IR-HUNTER®	128
> IR-PATROL®	132
> SNIPE-IR®	136

ARCHERY

> AccuPin®	142
> ACOG® XB	146

CUSTOMER CARE

> Warranty	152
> Returns/Repairs	153
> Export Controls	153
> Contact Information	154

ACOG®

REFLEX SIGHTS

IRON SIGHTS

VARIABLE POWER

ELECTRO OPTICS

ARCHERY

CUSTOMER CARE



MISSION & VALUES



VISION

Guided by our values, we endeavor to have our products used wherever precision aiming solutions are required to protect individual freedom.

MISSION

We will continue to be a leader in the design and manufacture of high-quality, innovative sighting systems for use by law enforcement, military and individual customers.

VALUES

- > **Honesty/Integrity**
We will be honest, dependable, trustworthy and fair towards each other, our employees, our customers and our suppliers.
- > **Teamwork/Dedication**
We will work together as employees, customers and suppliers, valuing the unique contributions of each, to produce optimal aiming solutions.
- > **Customers**
We desire long-term relationships with our customers. We will listen and continually improve our products to meet their needs.
- > **Quality/Innovation**
We will strive to attain a zero-defect rate in all our processes. Our products will be made to maximize durability and service life. We will continue to lead our industry by encouraging creative solutions.
- > **Morality**
We believe that America is great when its people are good. This goodness has been based on biblical standards throughout our history and we will strive to follow those morals.

The Trijicon® DIFFERENCE

A HERITAGE OF BRILLIANCE

Trijicon® is continuously seeking out the latest technologies to better enhance aiming solutions to address the needs of its customers. This pursuit is at the core of who we are and has been the heritage of Trijicon back to the founder, Glyn Bindon. Glyn was a great visionary, engineer, and pioneer of tritium and fiber optics technology—the foundation for much of the company's product success. The discovery of the interaction between the human eye and reticle technology continues to be a benchmark in Trijicon product development.

THE BINDON AIMING CONCEPT

Although human vision is based on a binocular or two-eyed vision of an image, traditional riflescopes present a monocular view of the target. This monocular view significantly decreases vision capabilities and makes it difficult to acquire and track targets.

Traditionally, “both eyes open” aiming has been widely used with iron sights or reflex-style sights, but use with a magnified scope was often deemed implausible. The Bindon Aiming Concept (BAC) is a method of combining “both eyes open” aiming while using a magnified scope.

Shooting with “both eyes open” offers several advantages to the user: better situational awareness, a far superior sense of balance, a wider field-of-view, and far less eye strain. These advantages aid the shooter in quick target acquisition and improved shooting performance.

UTILIZING BAC

When tracking a moving target with your shooting eye through a riflescope, the image appears blurry as the riflescope moves due to the magnification. This blurriness forces the brain to automatically switch eye focus and take in target data from the non-shooting eye (non-magnified). Due to the use of a highly illuminated aiming point in most Trijicon optics, the reticle remains visible in the shooting eye and your brain will superimpose the aiming point onto the non-magnified target.

When the weapon is moving onto the target, you will not notice any magnification, all that will be seen is the illuminated reticle. Once you slow the weapon onto the target, the target will “zoom” in, allowing you to identify and engage more accurately if necessary. This aiming concept happens naturally, without conscious thought, for those with equal or close-to-equal vision in both eyes.



MONOCULAR VIEW

BINOCULAR VIEW

FINDING YOUR DOMINANT EYE

In order to maximize the potential of “both eyes open” aiming, you must know which eye is dominant. To determine this, conduct the following test:

- > First, **OPEN BOTH EYES**, and hold your index finger out in front of your line of sight on a fixed object.
- > Next, **CLOSE** your non-shooting eye and note the position of finger on target.
- > Then **OPEN BOTH** eyes, keeping finger on target.
- > Finally, **CLOSE** opposite eye and note position of finger on target.
- > If your finger/aiming point does **NOT** move, that is your dominant eye. If your finger/aiming point moves off target at a great distance, your **OTHER** eye is dominant.



MILITARY & LAW ENFORCEMENT

TRUSTED

Proven, increased accuracy and combat-tested durability make Trijicon® sights and scopes the clear choice for military and law enforcement professionals. Trijicon sights are standard issue for many military divisions around the world (including U.S. Special Operations Forces and U.S.M.C.), along with hundreds of municipal and county departments and numerous state police departments.

TESTED

With decades of use by military and law enforcement, Trijicon's sights and scopes stand up to even the toughest situations. Our advanced technology optics are tested to the extreme to ensure the utmost durability and precision so military personnel and law officers can perform better, faster and more effectively.

TRUE

We believe that those who put their lives on the line for us deserve the very best. Providing brilliant, accurate optics and sights is just one way Trijicon® gives back to those who protect and serve. We also seek to maximize power sources with the latest technologies, from using tritium and fiber optics to solar cell-assisted illumination.

- > Trijicon ACOG®
- > Trijicon VCOG®
- > Trijicon RMR®
- > Trijicon MRO®
- > Trijicon MGRS®
- > Trijicon SRS®
- > Trijicon® Reflex
- > Trijicon AccuPoint®
- > Trijicon AccuPower®
- > Trijicon Bright & Tough™ Night Sights
- > Trijicon Bright & Tough™ Suppressor Night Sights
- > Trijicon HD™ Night Sights
- > Trijicon HD XR™ Night Sights
- > Trijicon® Fiber Sights
- > Trijicon® Electro Optics



SHOOTING & HUNTING

PRECISION

From hitting that 1,000-meter target to harvesting elk to defending one's life, the reasons to choose Trijicon® sights and optics are many. Our products allow for precision shots in any situation. From low light to even no light, know that accuracy and precision come standard on every Trijicon product.

PERFORMANCE

Trijicon® products are built to the highest standards and made to be both technologically advanced and durable. Whether shooting competitively, recreationally, or hunting around the globe, you can be assured your optic or sight will rise to the occasion.

PREFERENCE

No matter your preference, be it long guns, handguns or bows, there is a Trijicon® optic to fit your application. Many of our products are designed with cross-platform applications in mind, making it an easy transition from your long gun to your pistol.

- > Trijicon AccuPoint®
- > Trijicon AccuPower®
- > Trijicon ACOG®
- > Trijicon VCOG®
- > Trijicon RMR®
- > Trijicon MRO®
- > Trijicon SRS®
- > Trijicon® Reflex
- > Trijicon® Electro Optics
- > Trijicon Bright & Tough™ Night Sights
- > Trijicon Bright & Tough™ Suppressor Night Sights
- > Trijicon HD™ Night Sights
- > Trijicon HD XR™ Night Sights
- > Trijicon® Fiber Sights
- > Trijicon TrijiDot®
- > Trijicon AccuPin®
- > Trijicon ACOG® XB



Trijicon
ACOG®

THE SCOPE THAT CHANGED EVERYTHING

There's a reason the Trijicon ACOG® (Advanced Combat Optical Gunsight) is the official medium-distance engagement optic of the U.S. Special Operations Forces and Marine Corps. And there's a reason over one million ACOGs have been produced. They offer an illuminated reticle pattern for use in bright to low/no light, along with legendary durability and reliability. In fact, every feature of its design was chosen for a single purpose: to provide increased hit potential in all lighting conditions.

MODELS



1.5x16S



1.5x24



2x20



3x24



3x30



3.5x35



3.5x35 LED



4x32



4x32 BAC



4x32 LED



5.5x50



6x48

FEATURES

BATTERY-FREE ILLUMINATION

Most ACOG® models feature a tritium/fiber optic illuminated reticle that automatically adjusts the brightness based on available light.

RUGGED ALUMINUM-ALLOY HOUSING

Forged 7075-T6 aircraft-aluminum-alloy housing provides for a nearly indestructible sighting system.

“BOTH EYES OPEN” DESIGN

The ACOG® can be used as a CQB sight when shooting “both eyes open,” utilizing the Bindon Aiming Concept (see pg. 7).

SUPERIOR QUALITY GLASS LENSES

Multi-coated lenses provide superior clarity and light-gathering capabilities with zero distortion.

FIXED MAGNIFICATION

Fewer moving parts than a variable optic equals more durability. Seven magnifications available: 1.5x, 2x, 3x, 3.5x, 4x, 5.5x, and 6x.

BULLET DROP COMPENSATING & RANGING RETICLES

Available in most models.

COMBAT PROVEN

No other magnified optic has been used more in combat than the ACOG®.

SHOCK-RESISTANT

Proven to withstand recoil from a .22LR to a .50BMG and everything in between. Easily passes U.S. Military drop test requirements.

WATERPROOF

Exceptional waterproof performance. Dry nitrogen-filled to eliminate fogging. Exceeds military standards.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years on fiber optic scopes and 10 years on non-fiber optic scopes.



“I can't speak highly enough of this scope. It has been strapped to my leg through 37 airborne operations, 7 fast ropes in the mountains of the Korengal Valley and hundreds of combat patrols with zero failure. Thank you for such a great product.”

*— Staff Sergeant
Donovan Burson
Pathfinder Company*



SPECIFICATIONS

	1.5x16S	1.5x24	2x20	3x24	3x30	3.5x35
MAGNIFICATION	1.5x	1.5x	2x	3x	3x	3.5x
OBJECTIVE LENS	16mm	24mm	20mm	24mm	30mm	35mm
EYE RELIEF	2.4 in. 61.0mm	3.6 in. 91.4mm	2.1 in. 53.3mm	1.4 in. 35.6mm	1.9 in. 48.3mm	2.4 in. 61.0mm
EXIT PUPIL	0.42 in. 10.7mm	0.63 in. 16.0mm	0.39 in. 10.0mm	0.31 in. 8.0mm	0.33 in. 8.4mm	0.39 in. 10.0mm
FIELD OF VIEW (DEGREES)	7.4°	4.9°	5.6°	4.9°	3.7°	5.5°
FIELD OF VIEW	39.0 ft. @ 100 yds. 12.9m @ 100m	25.6 ft. @ 100 yds. 8.6m @ 100m	29.3 ft. @ 100 yds. 9.8m @ 100m	25.6 ft. @ 100 yds. 8.6m @ 100m	19.3 ft. @ 100 yds. 6.5m @ 100m	28.9 ft. @ 100 yds. 9.6m @ 100m
ADJUSTMENTS (PER IN. @ 100 YDS.)	2 Clicks	2 Clicks	2 Clicks	2 Clicks	4 Clicks	3 Clicks
DIMENSIONS (L X W X H) WITHOUT MOUNT	4.0 x 1.6 x 2.1 in. 102 x 42 x 53mm	5.8 x 1.6 x 2.1 in. 147 x 42 x 53mm	5.3 x 1.6 x 2.1 in. 135 x 42 x 53mm	5.0 x 1.8 x 2.1 in. 127 x 46 x 53mm	6.1 x 1.6 x 2.1 in. 155 x 42 x 53mm	8.0 x 2.1 x 2.9 in. 203 x 53 x 73mm
WEIGHT WITHOUT MOUNT	5.1 oz. 144.5g	6.3 oz. 179.1g	6.4 oz. 180.6g	6.1 oz. 173g	7.8 oz. 221.1g	14 oz. 397g
ILLUMINATION SOURCE	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
BATTERY LIFE	N/A	N/A	N/A	N/A	N/A	N/A
RETICLE CALIBRATION	N/A	N/A	N/A	.223 / 7.62x39	.223 / .308 / 7.62x39 / 300 BLK	.223 / .308 / M193 / 300 BLK

3.5x35 LED	4x32	4x32 BAC	4x32 LED	5.5x50	6x48
3.5x	4x	4x	4x	5.5x	6x
35mm	32mm	32mm	32mm	50mm	48mm
2.4 in. 61.0mm	1.5 in. 38.1mm	1.5 in. 38.1mm	1.5 in. 38.1mm	2.2 in. 55.9mm	2.7 in. 68.6mm
0.39 in. 10.0mm	0.32 in. 8.1mm	0.32 in. 8.1mm	0.32 in. 8.1mm	0.36 in. 9.1mm	0.32 in. 8.1mm
5.5°	7.0°	7.0°	7.0°	3.5°	3.3°
28.9 ft. @ 100 yds. 9.6m @ 100m	36.6 ft. @ 100 yds. 12.2 @ 100m	36.6 ft. @ 100 yds. 12.2 @ 100m	36.6 ft. @ 100 yds. 12.2 @ 100m	18.3 ft. @ 100 yds. 6.1m @ 100m	17.3 ft. @ 100 yds. 5.8m @ 100m
2 Clicks per in. @ 100m	2 Clicks	2 Clicks	2 Clicks per in. @ 100m	5 Clicks	4 Clicks
8.0 x 3.0 x 2.6 in. 203 x 76 x 66mm	5.8 x 2.0 x 2.3 in. 147 x 51 x 58mm	5.9 x 2.0 x 2.5 in. 150 x 51 x 64mm	6.0 x 2.9 x 2.5 in. 153 x 74 x 64mm	12.0 x 2.5 x 2.7 in. 305 x 64 x 69mm	9.0 x 2.9 x 3.4 in. 229 x 74 x 86mm
16.8 oz. 476.3g	10.9 oz. 309g	10.5 oz. 297.5g	14.3 oz. 406g	25.6 oz. 725.8g	36.9 oz. 1046.1g
LED Powered by a AA Battery	Tritium Only	Fiber Optics & Tritium	LED Powered by a AA Battery	Fiber Optics & Tritium	Fiber Optics & Tritium
12,000 hours* +	N/A	N/A	12,000 hours* +	N/A	N/A
.223 / .308	.223 / .308	.223 / .308 / M193 / 300 BLK / 6.8 SPC	.223 / 300 BLK	.223 / .308	.223 / .308 / .50 BMG


*When used at 70°F (21°C) on setting 4 of 6 with supplied alkaline battery. Extreme temperatures (high or low) will affect battery performance.

1.5x16S



Dual-Illuminated Circle Dot Reticle (Black Finish)

Standard Height: ■ TA44-C-400141 ■ TA44-C-400138 ■ TA44-C-400140
 Low Height: ■ TA44-C-400241 ■ TA44-C-400242 ■ TA44-C-400243



Circle Dot

3x24



Dual-Illuminated Crosshair .223/55gr. Ballistic Reticle (Black Finish)

Standard Height: ■ TA50-C-400223 ■ TA50-C-400225 ■ TA50-C-400224
 Low Height: ■ TA50-C-400229 ■ TA50-C-400231 ■ TA50-C-400230



Crosshair (.223)



Horseshoe/Dot (.223)

Dual-Illuminated Horseshoe/Dot .223/55gr. Ballistic Reticle (Black Finish)

Standard Height: ■ TA50-C-400226 ■ TA50-C-400228 ■ TA50-C-400227
 Low Height: ■ TA50-C-400232 ■ TA50-C-400234 ■ TA50-C-400233

Dual-Illuminated Crosshair 7.62x39/123gr. Ballistic Reticle (Black Finish)

Low Height: ■ TA50-C-400235 ■ TA50-C-400237 ■ TA50-C-400236



Crosshair (7.62x39)



Horseshoe/Dot (7.62x39)

Dual-Illuminated Horseshoe/Dot 7.62x39 Ballistic Reticle (Black Finish)

Low Height: ■ TA50-C-400238 ■ TA50-C-400240 ■ TA50-C-400239

1.5x24




Dual-Illuminated Triangle Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA45-C-400156 ■ TA45-C-400153

Dual-Illuminated Crosshair Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA45-C-400157 ■ TA45-C-400154



Triangle



Crosshair

3x30



Dual-Illuminated Chevron .223 Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400135 ■ TA33-C-400127 ■ TA33-C-400118

Dual-Illuminated Chevron .308 Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400136 ■ TA33-C-400128 ■ TA33-C-400120

Dual-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400137 ■ TA33-C-400129 ■ TA33-C-400130

Dual-Illuminated Crosshair .223 Remington Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400132 ■ TA33-C-400124 ■ TA33-C-400121

Dual-Illuminated Crosshair .308 Winchester Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400133 ■ TA33-C-400125 ■ TA33-C-400122

Dual-Illuminated Horseshoe/Dot 7.62x39 Ballistic Reticle with TA51 Mount (Black Finish)

Standard Height: ■ TA33-C-400134 ■ TA33-C-400126 ■ TA33-C-400123

Dual-Illuminated Crosshair 300BLK Ballistic Reticle with TA60 Mount (Black Finish)

Standard Height: ■ TA33-C-400164 ■ TA33-C-400163 ■ TA33-C-400162



Chevron



Horseshoe/Dot (.223)

2x20



Dual-Illuminated Triangle Reticle (Black Finish)

Standard Height: ■ TA47-C-400150 ■ TA47-C-400146

Dual-Illuminated Crosshair Reticle (Black Finish)

Standard Height: ■ TA47-C-400151 ■ TA47-C-400147 ■ TA47-C-400149

Dual-Illuminated Dot Reticle (Black Finish)

Standard Height: ■ TA47-C-400152 ■ TA47-C-400148



Dot



Triangle




Crosshair



Crosshair



Horseshoe/Dot (7.62x39)



Crosshair (300BLK)

3.5x35



Dual-Illuminated Donut .223 Ballistic Reticle
Black: ■ TA11 ■ TA11-G

Dual-Illuminated Circle/Chevron Reticle
Black: ■ TA11B

Dual-Illuminated Donut .308 Ballistic Reticle
Black: ■ TA11C

Dual-Illuminated Triangle .223 Ballistic Reticle **ITAR**
Black: ■ TA11D

Dual-Illuminated Chevron .308 Ballistic Reticle with TA51 Mount
Black: ■ TA11E ■ TA11E-G ■ TA11E-A

Dual-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount
Black: ■ TA11F ■ TA11F-G ■ TA11F-A

Dual-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA11H ■ TA11H-G

Dual-Illuminated Horseshoe/Dot .308 M240 BDC Reticle with TA51 Mount **ITAR**
Black: ■ TA11H-308 ■ TA11H-308G

Dual-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA11J ■ TA11J-G ■ TA11J-A

Dual-Illuminated Crosshair .308 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA11J-308 ■ TA11J-308G ■ TA11J308-A


Dual-Illuminated Horseshoe/Dot .223 M249 Ballistic Reticle with GDI Mount and ARD **ITAR**
Black: ■ TA11MGO-M249

Dual-Illuminated Crosshair 300 BLK Ballistic Reticle with TA51 Mount
Black: ■ TA11-C-100414 ■ TA11-C-100416 ■ TA11-C-100415

Dual-Illuminated Chevron M193 Reticle with TA51 Mount **ITAR**
Black: ■ TA11-D-100291 ■ TA11-D-100293 ■ TA11-D-100292



Donut



Triangle



Chevron




Circle Chevron




Horseshoe/Dot



Crosshair



Crosshair (300BLK)



Horseshoe/Dot (M249)

3.5x35 LED



LED-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount
Black: ■ TA110-C-100491 ■ TA110-C-100492

LED-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA110-D-100493 ■ TA110-D-100494

LED-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA110-D-100495 ■ TA110-D-100496

LED-Illuminated Chevron .308 Ballistic Reticle with TA51 Mount
Black: ■ TA110-C-100497 ■ TA110-C-100498

LED-Illuminated Horseshoe/Dot .308 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA110-D-100499 ■ TA110-D-100500

LED-Illuminated Crosshair .308 Ballistic Reticle with TA51 Mount **ITAR**
Black: ■ TA110-D-100501 ■ TA110-D-100502



Chevron



Crosshair



Horseshoe/Dot

4x32



Full-Illumination Crosshair .223 Ballistic Reticle

Black: ■ TA01

Full-Illumination Crosshair .308 Ballistic Reticle

Black: ■ TA01B

Illuminated LAPD Crosshair Reticle

Black: ■ TA01LAW

Center-Illuminated Crosshair .223 Ballistic Reticle, TA51 Mount, Backup Iron Sights and Dust Cover **ITAR**

Black: ■ TA01NSN

Sniper Gray: ■ TA01-D-100317

OD Green: ■ TA01-D-100318

FDE: ■ TA01-D-100319

Center-Illuminated Crosshair .308 Ballistic Reticle, TA51 Mount, Backup Iron Sights and Dust Cover **ITAR**

Black: ■ TA01NSN-308



Full-Illumination Crosshair



LAPD Crosshair



Center-Illuminated Crosshair

4x32 LED



LED-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount

Black: ■ TA02 ■ TA02-C-100390

LED-Illuminated Crosshair 300 BLK Ballistic Reticle with TA51 Mount

Black: ■ TA02-C-100431 ■ TA02-C-100432

LED-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount **ITAR**

Black: ■ TA02-D-100393 ■ TA02-D-100391

LED-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA51 Mount **ITAR**


Black: ■ TA02-D-100394 ■ TA02-D-100392




Crosshair



Crosshair (300BLK)



Chevron



Horseshoe/Dot

4x32 BAC



Dual-Illuminated Donut .223 Ballistic Reticle

Black: ■ TA31 ■ TA31-G

Dual-Illuminated Triangle .223 Ballistic Reticle

Black: ■ TA31A

Dual-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount

Black: ■ TA31-CH ■ TA31-CH-G

Sniper Gray: ■ TA31-C-100370 ■ TA31-C-100378

OD Green: ■ TA31-C-100371 ■ TA31-C-100379

FDE: ■ TA31-C-100372 ■ TA31-C-100380

Dual-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount **ITAR**

Black: ■ TA31F ■ TA31F-G ■ TA31F-A

Sniper Gray: ■ TA31-D-100308 ■ TA31-D-100311

OD Green: ■ TA31-D-100309 ■ TA31-D-100312

FDE: ■ TA31-D-100310 ■ TA31-D-100313

Dual-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA51 Mount **ITAR**

Black: ■ TA31H ■ TA31H-G ■ TA31H-A

Sniper Gray: ■ TA31-D-100365

OD Green: ■ TA31-D-100366

FDE: ■ TA31-D-100367

Dual-Illuminated Horseshoe/Dot 6.8 Ballistic Reticle with TA51 Mount **ITAR**

Black: ■ TA31H-68 ■ TA31H-68-G ■ TA31H-68-A

Dual-Illuminated ARMY Rifle Combat Optic for the M150 with Chevron Reticle and TA51 Mount **ITAR**

Black: ■ TA31RCO-M150CP ■ TA31RCO-M150CP-G

Dual-Illuminated USMC Rifle Combat Optic for the M4 with Chevron Reticle and TA51 Mount **ITAR**

Black: ■ TA31RCO-M4CP

Dual-Illuminated USMC Rifle Combat Optic for the A4 with Chevron Reticle and TA51 Mount **ITAR**

Black: ■ TA31RCO-A4CP

Dual-Illuminated Crosshair 300 BLK Ballistic Reticle with TA51 Mount

Black: ■ TA31-C-100411 ■ TA31-C-100413 ■ TA31-C-100412

Dual-Illuminated M193 Reticle with TA51 Mount **ITAR**

Black: ■ TA31-D-100288 ■ TA31-D-100290 ■ TA31-D-100289




Donut



Triangle




Crosshair



Chevron



Horseshoe Dot



Chevron (RCO)



Crosshair (300BLK)

5.5x50



Dual-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount
Black: ■ TA55

Dual-Illuminated Chevron .308 Ballistic Reticle with TA51 Mount
Black: ■ TA55A



6x48



Dual-Illuminated Chevron .223 Ballistic Reticle with TA75 Mount & M1913 Rail **ITAR**
Black: ■ TA648 ■ TA648-G ■ TA648-A






Dual-Illuminated Chevron .308 Ballistic Reticle with TA75 Mount & M1913 Rail **ITAR**
Black: ■ TA648-308 ■ TA648-308G ■ TA648-308A

Dual-Illuminated Horseshoe/Dot .308 Ballistic Reticle with TA75 Mount & M1913 Rail **ITAR**
Black: ■ TA648-308H

Dual-Illuminated Chevron .50 BMG Ballistic Reticle with TA75 Mount & M1913 Rail **ITAR**
Black: ■ TA648-50 ■ TA648-50G ■ TA648-50A

Dual-Illuminated Horseshoe/Dot .50 M2 Ballistic Reticle, GDI Mount, ARD & M1913 Rail **ITAR**
Black: ■ TA648MGO-M2

Dual-Illuminated Horseshoe/Dot .308 M240 Ballistic Reticle, GDI Mount, ARD & M1913 Rail **ITAR**
Black: ■ TA648MGO-M240





Trijicon

ACOG®/RMR® Combo

THE ULTIMATE SIGHT FOR CQB AND LONG DISTANCE

This dual-sighting system gives the shooter a distinct tactical advantage with the option of either the Trijicon ACOG® or the RMR®. For quick target acquisition, choose the RMR® Type 2 LED, Type 2 Adjustable LED or RMR® Dual-Illuminated sight. For accuracy and pinpoint bullet placement at a distance, choose the magnified ACOG. You have the best of both worlds. No tools are needed for windage and elevation adjustments because the ACOG also features external windage and elevation adjusters.

MODELS



4x32



3x30



6x48



3.5x35

ACOG®/RMR® Combo

ACOG®/RMR® Combo



3x30 ACOG® Dual-Illuminated Horseshoe/Dot .223 Ballistic Reticle with TA60 Mount RMR® Type 2 LED 3.25 MOA Red Dot Sight
Black: TA33-C-400312 TA33-C-400311

3x30 ACOG Dual-Illuminated Chevron .223 Ballistic Reticle with TA60 Mount Dual-Illuminated RMR 9.0 MOA Dot Sight
Black: TA33-C-400119 TA33-C-400160

3.5x35 ACOG Dual-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount RMR Type 2 LED 3.25 MOA Red Dot Sight ITAR
Black: TA11-D-100557


3.5x35 ACOG Dual-Illuminated Crosshair M249 Ballistic Reticle with LaRue Tactical Mount Dual-Illuminated RMR 9.0 MOA Amber Dot Sight ITAR
Black: TA11-D-100566

3.5x35 ACOG Dual-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount RMR Type 2 Adjustable LED 3.25 MOA Red Dot Sight
Black: TA11-C-100565

4x32 ACOG Center-Illuminated Crosshair .223 Ballistic Reticle with BUIS, Quick-Release Mount RMR Type 2 LED 3.25 MOA Red Dot Sight ITAR
FDE: TA01-D-100555

4x32 ACOG Center-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount RMR Type 2 LED 3.25 MOA Red Dot Sight ITAR
Black: TA01-D-100556

4x32 ACOG Dual-Illuminated Crosshair .223 Ballistic Reticle with BUIS, Quick-Release Mount RMR Type 2 LED 3.25 MOA Red Dot Sight ITAR
FDE: TA31-D-100553 TA31-D-100554

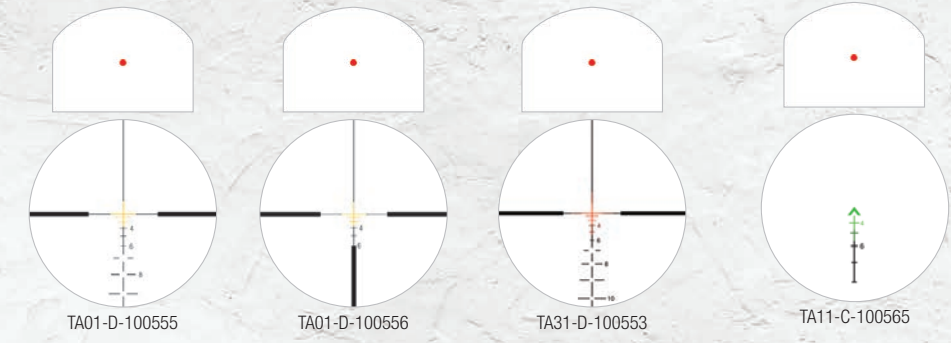

ACOG®/RMR® Combo



4x32 ACOG® Dual-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount RMR® Type 2 LED 3.25 MOA Red Dot Sight
Black: TA31-C-100550 TA31-C-100551 TA31-C-100552

4x32 ACOG Dual-Illuminated Chevron .223 Ballistic Reticle with TA51 Mount RMR Type 2 LED 3.25 MOA Red Dot Sight ITAR
Black: TA31-D-100549 TA31-D-100548
Sniper Gray: TA31-D-100568
OD Green: TA31-D-100569
FDE: TA31-D-100570

4x32 ACOG Dual-Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount Dual-Illuminated RMR 7.0 MOA Amber Dot Sight
Black: TA31RM04


4x32 LED ACOG Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount RMR Type 2 LED 3.25 MOA Red Dot Sight
Black: TA02-C-100558

4x32 LED ACOG Illuminated Crosshair .223 Ballistic Reticle with TA51 Mount RMR Type 2 Adjustable LED 3.25 MOA Red Dot Sight
Black: TA02-C-100564

6x48 ACOG Dual-Illuminated Chevron .223 Ballistic Reticle with TA75 Mount RMR Type 2 LED 6.5 MOA Red Dot Sight ITAR
Black: TA648-D-100559 TA648-D-100563

6x48 ACOG Dual-Illuminated Chevron .308 Ballistic Reticle with TA75 Mount RMR Type 2 LED 6.5 MOA Red Dot Sight ITAR
Black: TA648-D-100560 TA648-D-100561

6x48 ACOG Dual-Illuminated Chevron .500 Ballistic Reticle with TA75 Mount RMR Type 2 LED 6.5 MOA Red Dot Sight ITAR
Black: TA648-D-100562

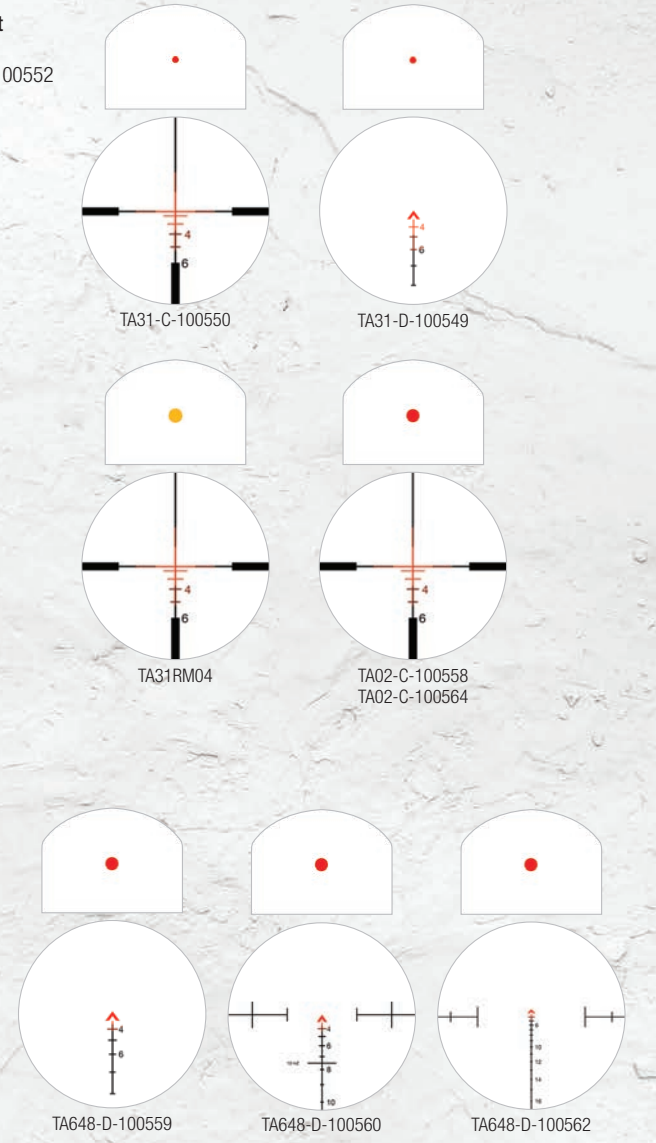


ACOG®/RMR® Combo

ACOG®/RMR® Combo



6x48 ACOG® Dual-Illuminated Horseshoe/Dot M240 BDC Reticle with LT644MDO-A Mount
Dual-Illuminated RMR® 9.0 MOA Amber Dot Sight **ITAR**
Black: ■ TA648MDO



ITAR ITAR controlled item. For export restrictions on all products, see page 153.
Reticles not shown to scale.



ABSOLUTE PRECISION

Rifles. Carbines. Shotguns. Pistols. Machine Guns. If you can shoot it, we can make it more precise. Trijicon® reflex sights are designed to provide fast target acquisition and engagement in most any light. They're also built with Trijicon's legendary toughness and versatility. This is how we've become one of the most trusted names in the reflex sight world.



RMR®



MRO®



REFLEX



SRS®



MGRS®

Trijicon® Reflex Sights



Trijicon
RMR®

AS RUGGED—AND AS ACCURATE—AS IT GETS

Add speed and precision to your self-defense, duty weapon, competition, or target pistol with an RMR® — an upgrade to your stock iron sights. The Trijicon RMR® is designed to be as durable as the legendary Trijicon ACOG®, while also improving precision and accuracy with any style or caliber of firearm.

The RMR is designed with a patented housing shape that absorbs impacts and diverts stresses away from the lens to increase durability. The RMR Type 2 LED and Adjustable LED models offer redesigned and upgraded electronics that are proven to perform when mounted on slide ride pistols and other small arms. The RMR Dual-Illuminated models offer a battery-free alternative that is just as rugged and reliable.

MODELS



RMR® Type 2 LED



RMR® Type 2
Adjustable LED



RMR® Dual-Illuminated

FEATURES

UNIQUE PATENTED HOUSING SHAPE

Forged 7075-T6 aircraft-aluminum-alloy housing shape diverts the force of an impact away from the lens, greatly increasing the durability of the sight.

TRUE-COLOR, MULTI-COATED LENS

Creates a wide-band light transmission for minimal change in target area color.

ADJUSTABLE WINDAGE/ELEVATION

Easily adjustable without special tools. 1 MOA per click.

RMR® DUAL-ILLUMINATED

Tritium-phosphor lamp illuminates reticle in low-light conditions and fiber optics automatically adjust the brightness level and contrast to available light conditions.

RMR® TYPE 2 ADJUSTABLE LED

Easy-to-use buttons on the sides of the optic allow the user to adjust the illumination brightness, toggle between manual and automatic modes, and power down the RMR® for storage.

VERSATILE SIGHT

Multiple primary applications including rifle, pistol, shotgun and carbine, or use as a secondary sight with a magnified optic.

PARALLAX FREE

WATERPROOF TO 20 METERS (66 ft.)

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years from date of original manufacture (Dual-Illuminated RMR®). Electronics are warranted for 5 years from date of original manufacture (LED & Adjustable LED RMR®).

UPGRADED ELECTRONICS*

Ruggedized battery contacts and electronics ensure performance and survivability in harsh environments.

BATTERY CONSERVATION MODE*

Automatically adjusts aiming dot to ambient lighting conditions after 16.5 hours.



The small size and rugged design make the Trijicon RMR® adaptable to many firearms platforms, including pistols. Photo to the right shows the RMR milled into a Glock 17 slide with Trijicon Bright & Tough™ Suppressor Sights.



**Not available on the Dual-Illuminated RMR, which offers battery-free technology.*

SPECIFICATIONS

SYSTEM	RMR® Type 2 LED	RMR® Type 2 Adjustable LED	RMR® Dual-Illuminated
MAGNIFICATION	1x	1x	1x
SIGHT WINDOW	.87 x .63 in. 22 x 16mm	.87 x .63 in. 22 x 16mm	.87 x .63 in. 22 x 16mm
LENS	Tempered Glass	Tempered Glass	Tempered Glass
ADJUSTMENTS	1 Click = 1 MOA	1 Click = 1 MOA	1 Click = 1 MOA
ADJUSTMENT RANGE (ELEVATION & WINDAGE)	150 MOA Total Travel	150 MOA Total Travel	150 MOA Total Travel
DIMENSIONS (L X W X H)	1.8 x 1.1 x 1.0 in. 46 x 28 x 25mm	1.8 x 1.2 x 1.0 in. 46 x 30 x 25mm	1.8 x 1.2 x 1.0 in. 46 x 30 x 25mm
WEIGHT	1.2 oz. (w/ battery) 34g	1.17 oz. (w/ battery) 33.2g	1.2 oz. 34g
ILLUMINATION SOURCE	LED Powered by a CR2032 Lithium Battery	LED Powered by a CR2032 Lithium Battery	Tritium & Fiber Optics
BATTERY LIFE	2 Years of Typical Use*, 5 Years in Dark Storage	4+ Years of Continuous Use* at Setting 4 of 8	N/A
BRIGHTNESS SETTINGS	Automatic	Automatic and 8 Adjustable Settings	Automatic
AVAILABLE MOUNTING ADAPTERS	Picatinny Rail, Weaver Rail, ACOG® Add-On, Riflescope Add-On, Pistol, Double Barrel Rifle	Picatinny Rail, Weaver Rail, ACOG Add-On, Riflescope Add-On, Pistol, Double Barrel Rifle	Picatinny Rail, Weaver Rail, ACOG Add-On, Riflescope Add-On, Pistol, Double Barrel Rifle

*When used at 70°F (21°C). Extreme temperatures (high or low) will affect lithium battery performance.

RMR® Type 2 LED




3.25 MOA Dot
Black: ■ RM01-C-700600
Sniper Gray: ■ RM01-C-700622
OD Green: ■ RM01-C-700623
FDE: ■ RM01-C-700624



3.25 MOA Dot

6.5 MOA Dot
Black: ■ RM02-C-700607
Sniper Gray: ■ RM02-C-700643
OD Green: ■ RM02-C-700644
FDE: ■ RM02-C-700645



6.5 MOA Dot

RMR® Type 2 Adjustable LED




1.0 MOA Dot
Black: ■ RM09-C-700742
Sniper Gray: ■ RM09-C-700743
OD Green: ■ RM09-C-700744
FDE: ■ RM09-C-700745



1.0 MOA Dot

3.25 MOA Dot
Black: ■ RM06-C-700672
Sniper Gray: ■ RM06-C-700694
OD Green: ■ RM06-C-700695
FDE: ■ RM06-C-700696



3.25 MOA Dot

6.5 MOA Dot
Black: ■ RM07-C-700679
Sniper Gray: ■ RM07-C-700715
OD Green: ■ RM07-C-700716
FDE: ■ RM07-C-700717



6.5 MOA Dot


ITAR ITAR controlled item. For export restrictions on all products, see page 153.
Reticles not shown to scale.

RMR® Dual-Illuminated



7.0 MOA Dot

Black:	■ RM04
Sniper Gray:	■ RM04-C-700163
OD Green:	■ RM04-C-700164
FDE:	■ RM04-C-700165



7.0 MOA Dot

9.0 MOA Dot

Black:	■ RM05	■ RM05G
Sniper Gray:	■ RM05-C-700187	■ RM05-C-700208
OD Green:	■ RM05-C-700188	■ RM05-C-700209
FDE:	■ RM05-C-700189	■ RM05-C-700210



9.0 MOA Dot

13.0 MOA Dot

Black:	■ RM03
Sniper Gray:	■ RM03-C-700142
OD Green:	■ RM03-C-700143
FDE:	■ RM03-C-700144



13.0 MOA Dot

12.9 MOA Triangle

Black:	■ RM08A	■ RM08G
Sniper Gray:	■ RM08-C-700256	■ RM08-C-700280
OD Green:	■ RM08-C-700257	■ RM08-C-700281
FDE:	■ RM08-C-700258	■ RM08-C-700282



12.9 MOA Triangle





Trijicon
MRO[®]

FAST TARGET ACQUISITION EVERY TIME

The Trijicon MRO[®] (Miniature Rifle Optic) and MRO[®] Patrol are sealed miniature reflex sights intended for use on rifles, carbines and shotguns to provide fast target acquisition. Their large apertures and tapered light paths maximize the viewing area and allow for better situational awareness and fast target engagement—especially from non-standard shooting positions. The MRO Patrol adds lens covers for both the ocular and objective lenses, along with an Anti-Reflection Device KillFlash[®] that protects you from unwanted detection or in bright conditions while eliminating glare.

MODELS



MRO[®] (Red Dot)



MRO[®] (Green Dot)



MRO[®] Patrol (Red Dot)

ALL MRO® FEATURES

LARGE VIEWING AREA

Allows faster target acquisition and engagement with reduced “tube effect.”

AMBIDEXTROUS BRIGHTNESS CONTROL

Brightness dial is equally usable by left- or right-handed operators without having to remove hand from fire control.

ADJUSTABLE BRIGHTNESS SETTINGS

Eight brightness settings, including two night vision-compatible settings with a mid-position “off” feature.

EASY-TO-SET ADJUSTERS

Adjusters provide positive-click reticle movement in ½-MOA increments and require no special tools for operation.

AIRCRAFT-GRADE ALUMINUM HOUSING

Forged 7075 housing and fully sealed construction protects against the toughest elements.

SUB-FLUSH ADJUSTERS

Capless design eliminates lost caps, snag hazards and ensures against inadvertent adjustment or loss of zero.

SUPERIOR QUALITY GLASS LENSES

Multi-coated lenses provide superior clarity and light-gathering capabilities with zero distortion and provide for a crisp dot reticle.

PARALLAX FREE

WATERPROOF TO 30 METERS (100 ft.)

Dry nitrogen-filled to prevent fogging.

SINGLE LITHIUM BATTERY

MRO Red Dot: 5 years of continuous use at day setting “3” (setting 5 of 8) at 70°F; MRO Green Dot: 1 year of continuous use at day setting “3” (setting 5 of 8) at 70°F

LIMITED LIFETIME WARRANTY

Electronics are warranted for 5 years from date of original manufacture.



The Trijicon MRO® was specifically engineered with a slightly canted objective lens, allowing for a shorter optic while minimizing reflections.

MRO® PATROL FEATURES

OCCULAR LENS COVER*

Lens caps protect glass from damage and help reduce glare and reflection.

ANTI-REFLECTION DEVICE KILLFLASH®*

Protects you from unwanted detection or in bright conditions and eliminates glare.



*Available only on the MRO® Patrol.



SPECIFICATIONS

SYSTEM	MRO® (Red Dot)	MRO® (Green Dot)	MRO® Patrol (Red Dot)
MAGNIFICATION	1x	1x	1x
OBJECTIVE SIZE	25mm	25mm	25mm
CLEAR APERTURE	0.805 in. 20.4mm	0.805 in. 20.4mm	0.805 in. 20.4mm
EYE RELIEF	Infinite	Infinite	Infinite
ADJUSTMENTS	1 Click = ½ MOA	1 Click = ½ MOA	1 Click = ½ MOA
ADJUSTMENT RANGE {ELEVATION & WINDAGE}	70 MOA Total Travel	70 MOA Total Travel	70 MOA Total Travel
DIMENSIONS (L X W X H)	2.6 x 1.7 x 2.0 in. 66 x 43 x 51mm	2.6 x 1.7 x 2.0 in. 66 x 43 x 51mm	3.6 x 1.8 x 2.0 in. 91 x 43 x 51mm
WEIGHT*	4.1 oz. (w/ Supplied Lithium Battery) 116g	4.1 oz. (w/ Supplied Lithium Battery) 116g	5.0 oz. (w/ Supplied Lithium Battery) 141.7g
ILLUMINATION SOURCE	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery	LED Powered by CR2032 Lithium Battery
AVAILABLE MOUNTING ADAPTERS	Picatinny Rail (in "Low," Full Co-Witness, and Lower 1/3 Co-Witness Heights)	Picatinny Rail (in "Low," Full Co-Witness, and Lower 1/3 Co-Witness Heights)	Picatinny Rail (Full Co-Witness, and Lower 1/3 Co-Witness Heights)
BATTERY LIFE	5 Years of Continuous Use** at Day-Setting 3	1 Year of Continuous Use** at Day-Setting 3	5 Years of Continuous Use** at Day-Setting 3
BRIGHTNESS SETTINGS	8 Total Settings: 2 Night Vision, 5 Day Settings, 1 Super-Bright	8 Total Settings: 2 Night Vision, 5 Day Settings, 1 Super-Bright	8 Total Settings: 2 Night Vision, 5 Day Settings, 1 Super-Bright

*All specs given without mount.

**When used at 70°F (21°C). Extreme temperatures (high or low) will affect lithium battery performance.

1x25 MRO® (Red Dot)



2.0 MOA Adjustable Red Dot (without Mount)

Black: ■ MRO-C-2200003

2.0 MOA Adjustable Red Dot w/ Low Mount


Black: ■ MRO-C-2200004

2.0 MOA Adjustable Red Dot w/ Full Co-Witness Mount

Black: ■ MRO-C-2200005

2.0 MOA Adjustable Red Dot w/ Lower 1/3 Co-Witness Mount

Black: ■ MRO-C-2200006



2.0 MOA Dot

1x25 MRO® (Green Dot)



2.0 MOA Dot Adjustable Green Dot (without Mount)

Black: ■ MRO-C-2200028

2.0 MOA Dot Adjustable Green Dot w/ Low Mount

Black: ■ MRO-C-2200029

2.0 MOA Dot Adjustable Green Dot w/ Full Co-Witness Mount

Black: ■ MRO-C-2200030

2.0 MOA Dot Adjustable Green Dot w/ Lower 1/3 Co-Witness Mount

Black: ■ MRO-C-2200031

2.0 MOA Dot Adjustable Green Dot w/ Low Levered Quick Release Mount


Black: ■ MRO-C-2200032

2.0 MOA Dot Adjustable Green Dot w/ Full Co-Witness Levered Quick Release Mount

Black: ■ MRO-C-2200033

2.0 MOA Dot Adjustable Green Dot w/ Lower 1/3 Co-Witness Levered Quick Release Mount

Black: ■ MRO-C-2200034



2.0 MOA Dot

1x25 MRO® Patrol (Red Dot)



2.0 MOA Adjustable Red Dot (without Mount) w/ KillFlash and Flip Caps


Black: ■ MRO-C-2200017

2.0 MOA Adjustable Red Dot w/ Lower 1/3 Co-Witness Mount, KillFlash and Flip Caps

Black: ■ MRO-C-2200018

2.0 MOA Adjustable Red Dot w/ Full Co-Witness Mount, KillFlash and Flip Caps

Black: ■ MRO-C-2200019



2.0 MOA Dot



Low Mount



Full Co-Witness Mount



Lower 1/3 Co-Witness Mount

ITAR ITAR controlled item. For export restrictions on all products, see page 153.
Reticles not shown to scale.



Trijicon
SRS[®]

SHORT BODY. SERIOUS TECHNOLOGY.

The Trijicon SRS[®] (Sealed Reflex Sight) is a uniquely designed, MIL-SPEC-rugged, parallax-free reflex sight which incorporates a larger aperture for maximum situational awareness in a shorter body. The illuminated 1.75 MOA red dot with 10 brightness settings (3 NVG compatible) is powered by a single AA battery, assisted by a solar cell to extend battery life. The snag-free button pads make brightness adjustments easy and eliminate fumbling under stress or with gloves.

MODELS



1x38 (with Thumbscrew Mount)



1x38 (with Quick-Release Mount)

FEATURES

HYBRID-ILLUMINATED RETICLE

Powered by a combination of a single AA battery, assisted by a solar cell to extend battery life.

RUGGED ALUMINUM-ALLOY HOUSING

Forged 7075-T6 aircraft-aluminum-alloy housing provides for a nearly indestructible sighting system.

SINGLE AA-ALKALINE OR LITHIUM BATTERY

Over 3 years of continuous use at brightness setting 7 of 10 at 70°F with supplied lithium battery, even in dark storage.

EASY PUSH BUTTONS

The brightness adjustment buttons are designed to be easily manipulated and accessible.

MANUALLY ADJUSTABLE BRIGHTNESS CONTROL

10 brightness settings, including 3 night vision and 1 super-bright. A visible dot—no matter the lighting conditions.

MULTI-LAYER BROADBAND ANTI-REFLECTIVE COATING

Parallax-free, 38mm objective lens provides a larger field of view. Unique lens design helps create a much shorter optic.

PARALLAX-FREE

WATERPROOF TO 50 METERS (165 ft.)

Dry nitrogen-filled to prevent fogging.

SHOCK RESISTANT

Designed to withstand shock from various weapon platforms.

LIMITED LIFETIME WARRANTY

Electronics are warranted for 5 years from date of original manufacture.

The Trijicon SRS® features a photovoltaic cell, or in layman's terms, a solar panel. This solar panel utilizes ambient light to assist in reticle illumination and helps extend the battery life.



SPECIFICATIONS

SYSTEM	1x38
MAGNIFICATION	1x
OBJECTIVE SIZE	38mm
CLEAR APERTURE	1.1 in. 28mm
FIELD OF VIEW	69 ft. @ 100 yds. (w/ 4 in. Eye Relief) 23m @ 100m (w/ 4 in. Eye Relief)
ADJUSTMENTS	1 Click = 1/2 MOA
ADJUSTMENT RANGE (ELEVATION AND WINDAGE)	150 MOA Total Travel
DIMENSIONS (L X W X H)	3.75 x 2.5 x 2.4 in. (w/o Mount) 95 x 64 x 61mm
WEIGHT	10.9 oz. (w/ Supplied Lithium Battery and w/o Mount) 310g
ILLUMINATION SOURCE	LED Powered by a Single AA Alkaline or Lithium Battery Assisted by a Solar Panel
BATTERY LIFE	3+ Years Continuous Use at Brightness Setting 7 of 10* (Lithium Battery) 2.5+ Years Continuous Use at Brightness Setting 7 of 10* (Alkaline Battery)
BRIGHTNESS SETTINGS	10 Total Settings: NV 1, NV 2, NV 3, Day 1, Day 2, Day 3, Day 4, Day 5, Day 6, Super-Bright
PHOTOVOLTAIC CELL	Provides Supplemental Power when in Daylight Conditions, Further Increasing Battery Life


*When used at 70°F (21°C). Extreme temperatures (high or low) will affect lithium battery performance.

1x38 (with Thumbscrew Mount)



38mm Sealed Reflex Sight, 1.75 MOA Dot with Thumbscrew Mount

Black: ■ SRS01




1.75 MOA Dot

1x38 (with Quick-Release Mount)



38mm Sealed Reflex Sight, 1.75 MOA Dot with Quick-Release Mount

Black: ■ SRS02



1.75 MOA Dot

ITAR ITAR controlled item. For export restrictions on all products, see page 153.
Reticles not shown to scale.



Trijicon®
Reflex

AS ACCURATE AS IT IS VERSATILE

The Trijicon® Reflex sight is a robust, battery-free, illuminated sight. Designed for close-quarter engagement, the Reflex offers fast target acquisition while maintaining pinpoint accuracy. It allows users to shoot with “both eyes open”—a critical advantage. With several mounting adapters available, this versatile sight is a prime choice for rifles, carbines and shotguns.

MODELS



1x24



1x42

Trijicon® Reflex

FEATURES

BATTERY-FREE ILLUMINATED RETICLE

A combination of fiber optics and tritium provides an illuminated reticle. No batteries needed.

DURABLE ALUMINUM-ALLOY HOUSING

Aircraft-aluminum-alloy housing provides for a nearly indestructible sighting system.

TRUE-COLOR, MULTI-COATED LENSES

Creates wide-band light transmission.

SURFACE FLUSH ADJUSTERS

VERSATILE SIGHT

Multiple platform applications including bolt-action rifle, shotgun and carbine.

SHOCK RESISTANT

Designed to withstand shock from various weapon platforms.

PARALLAX FREE

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years from date of original manufacture.



*The original 1x24
Trijicon® Reflex sight
was adopted by the
U.S. Special Forces
for the SOPMOD M4
Carbine kit in 1996.*



SPECIFICATIONS


	1x24	1x42
MAGNIFICATION	1x	1x
OBJECTIVE SIZE	24mm	42mm
CLEAR APERTURE	0.95 in. 24mm	1.54 in. 39mm
ADJUSTMENTS	1 Click = 1 MOA	1 Click = 1 MOA
ADJUSTMENT RANGE (ELEVATION & WINDAGE)	60 MOA Total Travel	60 MOA Total Travel
DIMENSIONS (L X W X H)	4.25 x 1.35 x 1.65 in. 108 x 34 x 42mm	5.0 x 2.1 x 2.2 in. 127 x 53 x 56mm
WEIGHT	4.2 oz. 119g	8.7 oz. 246.6g
ILLUMINATION SOURCE	Fiber Optics & Tritium	Fiber Optics & Tritium
AVAILABLE MOUNTING ADAPTERS	Carry Handle, Picatinny Rail, Weaver Rail, AK47	Carry Handle, Picatinny Rail, Weaver Rail, AK47

*All specs given without mount.

1x24




- 4.5 MOA Dot** **ITAR**
Black: ■ RX01NSN
- 6.5 MOA Dot**
Black: ■ RX01
- 12.9 MOA Triangle**
Black: ■ RX06

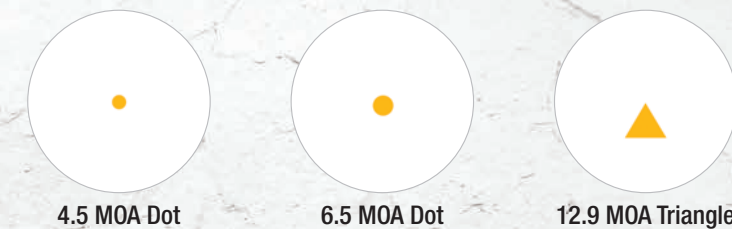

1x42



- 4.5 MOA Dot**
Black: ■ RX34
Sniper Gray: ■ RX34-C-800092
OD Green: ■ RX34-C-800093
FDE: ■ RX34-C-800094
- 6.5 MOA Dot**
Black: ■ RX30
Sniper Gray: ■ RX30-C-80065
OD Green: ■ RX30-C-80066
FDE: ■ RX30-C-80067
- RX34-C-800112
■ RX30-C-800113

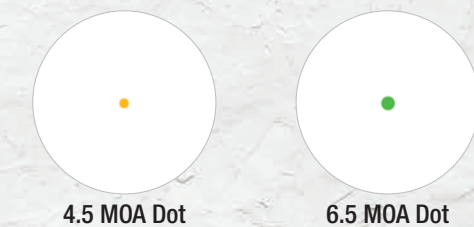

ITAR ITAR controlled item. For export restrictions on all products, see page 153.
Reticles not shown to scale.



Trijicon
MGRS®

BECOME A FIRST-ROUND-HIT MACHINE

The Machine Gun Reflex Sight (MGRS®) is a non-magnified optic that mounts to both the M2 and M240 machine guns. The Trijicon MGRS is intended to aid the machine gunner in rapid target acquisition and engagement that will allow keeping “both eyes open” from a natural shooting position. Accuracy is enhanced by use of the machine-gun-specific, interchangeable range dials, and performance is assured with a strong 7075-T6 forged-aluminum housing.

MODELS



MGRS®



MGRS® MAG COMBO

FEATURES

INTERCHANGEABLE RANGING DIALS

Two interchangeable dials for the M2 (.50 caliber) and M240 (.308/7.62) machine gun allow operator to dial in target distances for specific host weapons.

35 MOA SEGMENTED CIRCLE WITH 3 MOA DOT

Significantly increases the probability of first-round hits.

FORGED 7075-T6 ALUMINUM HOUSING

Nearly indestructible aircraft-grade aluminum and 80% stronger than extruded 6061.

LARGE OBJECTIVE LENS

Ample 3 in. x 2 in. viewing area.

WATERPROOF TO 2 METERS (6.6 ft.)

Dry nitrogen-filled and fog resistant.

EASILY ACCESSIBLE BATTERY COMPARTMENT

Requires one CR123A lithium battery.

THREE DETACHABLE PICATINNY RAILS

Detachable rails allow for mounting of lasers and LRFs to the top or side of optic.

WINDAGE AND ELEVATION ADJUSTMENTS

Includes elevation and azimuth adjustment to 100 MOA total travel.

LIMITED LIFETIME WARRANTY


Electronics are warranted for 5 years from date of original manufacture.



SPECIFICATIONS


	MGRS®	MGRS® MAG Combo
MAGNIFICATION	1x	3x
RETICLE PATTERN	35 MOA Segmented Circle with 3 MOA Dot	35 MOA Segmented Circle with 3 MOA Dot
DAY RETICLE COLOR	Red	Red
HOUSING MATERIAL	7075-T6 Forged Aluminum	7075-T6 Forged Aluminum
IMMERSION	Waterproof to 2m (6.6 ft.)	Waterproof to 2m (6.6 ft.)
ADJUSTMENT RANGE (ELEVATION & WINDAGE)	100 MOA Total Travel	40 MOA Total Travel
DIMENSIONS (L X W X H)	8.78 x 4.38 x 5.22 in. 108 x 34 x 42mm	12.1 x 4.4 x 5.3 in. 136 x 34 x 42mm
WEIGHT	66.9 oz. 4.18 lbs.	72.49 oz. 4.53 lbs.
RANGE	Interchangeable Range Knobs for M2 and M240	Interchangeable Range Knobs for M2 and M240
ILLUMINATION SOURCE	Battery	Battery

MGRS®



35 MOA Segmented Circle with 3 MOA Dot

MGRS® MAG Combo



35 MOA Segmented Circle with 3 MOA Dot

The Trijicon MGRS® MAG 3x Magnifier is built to work with the Trijicon MGRS for the ultimate first-round-hit solution. It is shown here with a flip-to-the-side mount, which is sold separately.



THE FIRST CHOICE OF PROFESSIONALS

Traditional iron sights are often ineffective in low-light situations, so we did something about that. Trijicon® iron sights excel in a wide range of lighting conditions (including low light) and are built with our legendary durability to handle whatever comes their way. Take advantage of superior technology for aiming solutions you can trust.

Trijicon® Iron Sights



Bright & Tough™
Night Sights



Bright & Tough™
Suppressor
Night Sights




HD™ Night Sights



HD XR™ Night Sights



Trijicon® Fiber Sights



TrijiDot® Fiber Optic
Shotgun Sights



Trijicon

Bright & ToughTM Night Sights

AMERICA'S FINEST DESERVE THE BEST

The Trijicon Bright & ToughTM Night Sights are a self-luminous, three-dot, night sight alternative to traditional iron sights. They are the first choice of major handgun manufacturers and standard issue with numerous local, state and federal law enforcement agencies.

MODELS



Bright & Tough™ Night Sights

FEATURES

INSTANTLY VISIBLE SIGHT PICTURE IN NO-LIGHT OR LOW-LIGHT SITUATIONS

Tritium phosphor-filled glass lamp provides battery-free glow allowing for a visible sight picture in all lighting situations.

INCREASED DAYLIGHT DOT VISIBILITY

White-painted rings around tritium lamps enhance user's ability to see sight picture in bright-light shooting situations.

ENHANCED PROTECTION FROM HEAVY RECOIL AND HARSH CLEANING SOLVENTS

Tritium gas lamps are contained within proactive aluminum cylinders and have additional silicone rubber cushioning.

EVENLY DISTRIBUTED LIGHT FROM TRITIUM LAMPS

Each Trijicon® tritium lamp is capped with a sapphire jewel that helps evenly distribute the light from the lamp and also acts as an additional layer of protection from puncture and cleaning solvents.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 5 years on orange lamps, 12 years on green and yellow lamps from date of original manufacture.

CONFIGURATIONS

COLOR COMBINATIONS:



Green Lamps



Yellow Rear Lamps



Orange Rear Lamps

STANDARD HEIGHT MODELS TO FIT THESE MANUFACTURERS:

- | | | | |
|-------------------|---------------|-----------------|---------------------|
| 1911 | Beretta® | Browning® | Colt® |
| CZ™ | Desert Eagle® | Firestar™ | FN® America |
| Glock® | H&K® | Kimber® | Remington® |
| Ruger® | Sig Sauer® | Smith & Wesson® | Springfield Armory® |
| Steyr-Mannlicher™ | Taurus® | Walther® | |





Trijicon

Bright & Tough Suppressor Night Sights

QUIET DOMINATION

Trijicon Bright & Tough™ Suppressor Night Sights continue the low-light and no-light prowess of the original Bright & Tough Night Sights, while being designed specifically for handguns fitted with suppressors. They can also serve as backup iron sights for the growing number of shooters who utilize pistol-mounted red dot sights, such as the Trijicon RMR®. Multiple front/rear configurations are available for a variety of applications.

MODELS



Bright & Tough™ Suppressor Night Sights

FEATURES

INCREASED HEIGHT TO ACCOMMODATE MULTIPLE SHOOTING APPLICATIONS

Specifically engineered to be as robust as possible while still allowing use with a suppressor or as backup iron sights for a slide-mounted red dot sight, such as the Trijicon RMR®.

INSTANTLY VISIBLE SIGHT PICTURE IN NO-LIGHT AND LOW-LIGHT SITUATIONS

Tritium phosphor-filled glass lamp provides battery-free glow, allowing for a visible sight picture in all lighting situations.

INCREASED DAYLIGHT DOT VISIBILITY

White-painted rings around tritium lamps enhance user's ability to see sight picture in bright-light shooting situations.

ENHANCED PROTECTION FROM HEAVY RECOIL AND HARSH CLEANING SOLVENTS

Tritium gas lamps are contained within protective aluminum cylinders and have additional silicone rubber cushioning.

EVENLY DISTRIBUTED LIGHT FROM TRITIUM LAMPS

Each Trijicon® tritium lamp is capped with a sapphire jewel that helps evenly distribute the light from the lamp and also acts as an additional layer of protection from puncture and cleaning solvents.

LIMITED LIFETIME WARRANTY


The Trijicon® Suppressor Sights offer tritium illumination for up to 12 years (on green and yellow lamps) and 5 years (on orange lamps) from date of original manufacture.

CONFIGURATIONS

GLOCK® COLOR COMBINATIONS:



Green Lamps



Yellow Rear Lamps



Orange Rear Lamps

ALL OTHER MANUFACTURER COLOR COMBINATIONS:



Green Lamps

STANDARD HEIGHT MODELS TO FIT THESE MANUFACTURERS:

FN® America
Sig Sauer®

Glock®
Smith & Wesson®

H&K®
Springfield Armory®





Trijicon

HD™ Night Sights

PRECISION IN ANY LIGHT

The Trijicon HD™ Night Sights are a self-luminous, three-dot night sight set. The front sight features a highly visible photoluminescent paint outline to quicken sight acquisition. The “U” notch rear sight is angled and serrated to reduce glare and aid in front-sight focus.

MODELS



HD™ Night Sights

FEATURES

ENHANCED FRONT-SIGHT ACQUISITION IN BRIGHT, TRANSITIONAL AND NO-LIGHT SITUATIONS

Glow-in-the-dark, photoluminescent-painted front outline combines with a "U" notch rear and black-painted rear outlines to quickly draw your eye to the front post in all lighting conditions.

ONE-HANDED SLIDE MANIPULATION

Steeply hooked front surface to assist in an emergency, one-handed slide manipulation.

INSTANTLY VISIBLE SIGHT PICTURE IN NO-LIGHT AND LOW-LIGHT SITUATIONS

Tritium phosphor-filled glass lamp illuminates sights for high visibility in all lighting conditions.

ENHANCED PROTECTION FROM HEAVY RECOIL AND HARSH CLEANING SOLVENTS

Tritium gas lamps are contained within protective aluminum cylinders and have additional silicone rubber cushioning.

EVENLY DISTRIBUTED LIGHT FROM TRITIUM LAMPS

Each Trijicon® tritium lamp is capped with a sapphire jewel that helps evenly distribute the light and also acts as an additional layer of protection from puncture and cleaning solvents.

LIMITED LIFETIME WARRANTY


Tritium lamp is warranted to illuminate for 12 years from date of original manufacture.

CONFIGURATIONS

COLOR COMBINATIONS:




Yellow Outline/Green Lamps



Orange Outline/Green Lamps

STANDARD-HEIGHT MODELS TO FIT THESE MANUFACTURERS:

- | | | |
|-----------------|---------------------|------------|
| 1911 | Beretta® | Colt® |
| FN® America | Glock® | H&K® |
| Remington® | Ruger® | Sig Sauer® |
| Smith & Wesson® | Springfield Armory® | Walther® |






Trijicon

HD XR™ Night Sights

THE NEXT LEVEL OF PRECISION

Building on the features of the HD™ Night Sights, the Trijicon HD XR™ Night Sights are for the next level of advanced target identification and engagement at increased distances. A thinner front-sight post allows shooters to have a larger field of view that further enhances the ability to identify targets, expedite engagements and see hits on target at longer distances.

MODELS

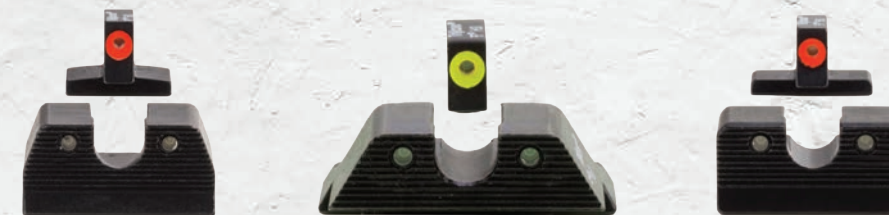

HD XR™ Night Sights

FEATURES

EXPANDED FIELD OF VIEW AND A PRECISION SIGHT PICTURE FOR LONGER-RANGE ENGAGEMENTS

Thin front post (.122 in. width) promotes a larger field of view for fast target identification and engagement at longer distances.

ENHANCED FRONT SIGHT ACQUISITION IN BRIGHT, TRANSITIONAL AND NO-LIGHT SITUATIONS

Glow-in-the-dark, photoluminescent-painted front outline combines with a "U" notch rear and black-painted rear outlines to quickly draw your eye to the front post in all lighting conditions.

ONE-HANDED SLIDE MANIPULATION

Steeply hooked front surface to assist in an emergency, one-handed slide manipulation.

INSTANTLY VISIBLE SIGHT PICTURE IN NO-LIGHT AND LOW-LIGHT SITUATIONS

Tritium phosphor-filled glass lamp illuminates sights for high visibility in all lighting conditions.

ENHANCED PROTECTION FROM HEAVY RECOIL AND HARSH CLEANING SOLVENTS

Tritium gas lamps are contained within protective aluminum cylinders and have additional silicone rubber cushioning.

EVENLY DISTRIBUTED LIGHT FROM TRITIUM LAMPS

Each Trijicon® tritium lamp is capped with a sapphire jewel that helps evenly distribute the light and also acts as an additional layer of protection from puncture and cleaning solvents.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 12 years from date of original manufacture.

CONFIGURATIONS

COLOR COMBINATIONS:



Yellow Outline/Green Lamps



Orange Outline/Green Lamps

STANDARD-HEIGHT MODELS TO FIT THESE MANUFACTURERS:

Beretta™

FN® America

Glock®

H&K®

Sig Sauer®

Smith & Wesson®

Springfield Armory®





Trijicon®

Fiber Sights

ILLUMINATION FOR A CLEAR, PRECISE SIGHT PICTURE.

Behind Trijicon® Fiber Sights are years of engineering and manufacturing experience in producing the industry's leading night sight and fiber-illuminated scopes and sights. Featuring similar fiber optic materials used in several Trijicon fiber optic scopes and sights, including the battle-proven ACOG®, the Trijicon Fiber Sights are purposely engineered to bring the absolute brightest aiming point while retaining strength and maintaining a refined sight picture. Whether carrying or competing, these bright, thin sights create the perfect aiming point for fast, accurate rounds on target.

MODELS



Fiber Sights

FEATURES

HIGHLY VISIBLE FRONT SIGHT

A bright front post fiber (0.060" diameter) combined with a subdued rear sight promotes acquisition of front sight and target.

CLEAR, PRECISE SIGHT PICTURE

A thin front post (.110" width) allows for a refined sight picture in a variety of shooting environments and distances and gives a better field of view for longer range engagements.

WITHSTANDS RIGOROUS SHOOTING, ROUGH HANDLING, AND AGGRESSIVE HOLSTER USE

Using leading edge fiber technology and Trijicon's legendary rugged metal construction, this fiber sight maximizes retention and durability.

ONE-HANDED RETURN MANIPULATION

Steeply hooked front surface of rear sight assists in emergency one-handed slide manipulations.

COMFORTABLE TO CONCEAL

Rounded edges of rear sight reduce snag points for improved comfort while carrying.

LIMITED LIFETIME WARRANTY



CONFIGURATIONS

COLOR COMBINATIONS:



Green



Red



Trijicon® Fiber Sights come from the factory with a red fiber preinstalled on the front sight, along with additional red and green fiber replacements. Additional fiber replacements are available for purchase.

STANDARD-HEIGHT MODELS TO FIT THESE MANUFACTURERS:

1911
Glock®
Smith & Wesson®

CZ®
H&K®
Springfield Armory®

FN® America
Sig Sauer®
Walther®





Trijicon

TrijiDot[®]

AIM WITH CONFIDENCE

The TrijiDot[®] is a fiber optic shotgun sight. The fiber optic collects ambient light while a rugged sapphire lens magnifies and focuses the light, resulting in a bright aiming point for a wide range of lighting conditions.

MODELS



FEATURES

FIBER OPTIC TECHNOLOGY

Collects ambient light to provide a brilliant aiming point in most lighting conditions.

ANODIZED AIRCRAFT-GRADE ALUMINUM

Robust fiber optic protection.

SECURE NOTCHED MOUNT

Fits over existing bead sight, and locks in place with four set screws.

LARGE BEAD SIGHT

0.157 in./4.0mm bead diameter allows for quick target acquisition.

RUGGED SAPPHIRE LENS

Magnifies and focuses light from fiber optic.

SHOCK RESISTANT

Withstands all shotgun recoils.

LIMITED LIFETIME WARRANTY



CONFIGURATIONS

COLORS:



SH01-G/SH01-R

Fits These Models (.210" – .280" Wide Barrel Ribs):

BENELLI®

Vinci
Montefeltro

BROWNING®

Gold
Silver
Maxus
SX3

BERETTA®

Xtrema II
SX3

SH02-G/SH02-R

Fits These Models (.265" – .335" Wide Barrel Ribs):

BENELLI®

M2
Super Black Eagle 2
Sport 2
Cordoba
Nova

REMINGTON®

870 (All Ribbed-Barrel Versions)
11-87

ITHACA®

Model 37

STOEGER®

P-350

SH03-G/SH03-R

Fits These Models (.325" – .395" Wide Barrel Ribs):

MOSSBERG®

500 Series (with Barrel Rib)
800 Series (e.g., 835)
900 Series (e.g., 935)



For export restrictions on all products, see page 153.



Trijicon® Variable Power

THE TOOLS OF A MARKSMAN

For decades, Trijicon® variable-powered riflescopes have earned the trust of America's military, law enforcement and sporting enthusiasts. Every optic is built with legendary toughness, precise adjustability and a high-quality lens system that gives you the accuracy you need to get the job done every time. Choose your tool wisely.



AccuPoint®



VCOG®



AccuPower®



Trijicon

AccuPoint®

ENHANCED ACCURACY IN LOW LIGHT OR NO LIGHT

The Trijicon AccuPoint® is a premium, variable-powered sporting riflescope featuring a battery-free illuminated reticle, superior glass clarity and rugged construction. Designed to stand up to the elements, the AccuPoint maintains the refinement needed for precise windage and elevation adjustments. The multi-layer, coated lenses provide superior light transmission, while the illuminated reticle aids in quick target engagement.

MODELS



1-4x24



1-6x24



2.5-10x56



2.5-12.5x42



3-9x40



4-16x50



5-20x50

Trijicon AccuPoint®

FEATURES

BATTERY-FREE ILLUMINATION

Fiber optics automatically adjust the brightness level and contrast of the illuminated reticle to available light conditions and a tritium phosphor lamp illuminates the reticle in low light or no light.

VARIABLE POWER

Allows the user to adjust magnification level to situational needs.

AIRCRAFT-GRADE ALUMINUM HOUSING

All-weather rugged construction protects against the toughest elements.

SUPERIOR QUALITY LENSES

Multi-coated lenses provide superior clarity and light-gathering capabilities with zero distortion.

SECOND FOCAL PLANE RETICLE

Reticle size remains constant as magnification increases, which provides a more exact aiming point at higher magnifications.

LONG EYE RELIEF

Provides unparalleled eye relief and protects against high-impact recoil from larger caliber rifles.

EASY-FOCUS EYEPIECE "BOTH EYES OPEN"

The illuminated reticles allow you to shoot with "both eyes open" for better target acquisition.

ZERO FORWARD EMISSION

The illuminated reticle does not project any illumination from the objective lens.

EASY-TO-SET ADJUSTERS

MATTE BLACK FINISH

Eliminates glare and light reflection.

WATERPROOF TO 3 METERS (10 ft.)

Dry nitrogen-filled to eliminate fogging.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years from date of original manufacture.



The 5-20x50 AccuPoint® features easy-to-use external adjuster controls for windage and elevation adjustment and a side parallax adjuster for enhanced accuracy at long ranges.



SPECIFICATIONS

	1-4x24	1-6x24	2.5-10x56	2.5-12.5x42
MAGNIFICATION	1 – 4x	1 – 6x	2.5 – 10x	2.5 – 12.5x
OBJECTIVE LENS	24mm	24mm	56mm	42mm
FOCAL PLANE	Second	Second	Second	Second
EYE RELIEF	3.2 in. Constant 81.3mm Constant	3.9 in. Constant 100mm Constant	4.1 – 2.8 in. 104 – 71mm	3.9 in. Constant 100mm Constant
EXIT PUPIL	0.69 – 0.20 in. 17.5 – 5.1mm	0.47 – 0.16 in. 12 – 4.1mm	0.64 – 0.22 in. 16.3 – 5.6mm	0.42 – 0.13 in. 10.6 – 3.3mm
FIELD OF VIEW (DEGREES)	18.0° – 4.6°	21.4° – 3.6°	7.2° – 1.9°	7.8° – 1.6°
FIELD OF VIEW	94.2 – 24.1 ft. @ 100 yds. 31.4 – 8.0m @ 100m	117.5 – 18.8 ft. @ 100 yds. 39.2 – 6.3m @ 100m	37.7 – 9.9 ft. @ 100 yds. 12.6 – 3.3m @ 100m	41.3 – 8.3 ft. @ 100 yds. 13.8 – 2.8m @ 100m
ADJUSTMENTS	1/4 MOA Per Click 1/10 MIL Per Click	1/4 MOA Per Click 1/10 MIL Per Click	1/4 MOA Per Click 1/10 MIL Per Click	1/4 MOA Per Click 1/10 MIL Per Click
ADJUSTMENT RANGE (ELEVATION AND WINDAGE)	90 MOA Total Travel	110 MOA Total Travel 32.6 MIL Total Travel	60 MOA Total Travel	90 MOA Total Travel 26.7 MIL Total Travel
PARALLAX ADJUSTMENT RANGE	N/A	N/A	N/A	10 yds. to Infinity
DIMENSIONS (L X W X H)	10.3 x 2.0 x 2.0 in. 262 x 50 x 50mm	11.0 x 2.0 x 2.0 in. 280 x 50 x 50mm	13.8 x 2.6 x 2.6 in. 351 x 65 x 65mm	13.8 x 2.4 x 2.3 in. 351 x 61 x 58mm
WEIGHT	14.4 oz. 408.2g	19.2 oz. 545.0g	20.7 oz. 586.8g	22.4 oz. 635.0g
ILLUMINATION SOURCE	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
TUBE DIAMETER	30mm	30mm	30mm	30mm

	3-9x40	4-16x50	5-20x50
MAGNIFICATION	3 – 9x	4 – 16x	5 – 20x
OBJECTIVE LENS	40mm	50mm	50mm
FOCAL PLANE	Second	Second	Second
EYE RELIEF	3.6 – 3.2 in. 91.4 – 81.3mm	3.6 – 3.7 in. 92 – 93mm	3.8 – 4.1 in. 96 – 103mm
EXIT PUPIL	0.52 – 0.17 in. 13.2 – 4.3mm	0.37 – 0.12 in. 9.3 – 3.1mm	0.39 – 0.10 in. 10 – 2.5mm
FIELD OF VIEW (DEGREES)	6.5° – 2.2°	4.9° – 1.2°	3.7° – 1.0°
FIELD OF VIEW	34.0 – 11.5 ft. @ 100 yds. 11.3 – 3.8m @ 100m	25.8 – 6.4 ft. @ 100 yds. 8.6 – 2.1m @ 100m	19.4 – 5.2 ft. @ 100 yds. 6.5 – 1.8m @ 100m
ADJUSTMENTS	1/4 MOA Per Click 1/10 MIL Per Click	1/4 MOA Per Click 1/10 MIL per click	1/4 MOA Per Click 1/10 MIL Per Click
ADJUSTMENT RANGE (ELEVATION AND WINDAGE)	50 MOA Total Travel	80 MOA Total Travel 23.7 MIL Total Travel	40 MOA Total Travel
PARALLAX ADJUSTMENT RANGE	N/A	10 yds. to Infinity	40 yds. to Infinity
DIMENSIONS (L X W X H)	12.4 x 1.9 x 1.9 in. 315 x 47 x 47mm	13.9 x 2.5 x 2.5 in. 353 x 63.5 x 63.5mm	13.6 x 3.2 x 3.2 in.* 345 x 82 x 82mm
WEIGHT	13.4 oz. 379.9g	24.2 oz. 685g	26.9 oz.* 762.6g
ILLUMINATION SOURCE	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
TUBE DIAMETER	1 in.	30mm	30mm



1-4x24



1-6x24



2.5-10x56



2.5-12.5x42



3-9x40



4-16x50



5-20x50

*Sunshade not included.

1-4x24




- 30mm Rifle scope with BAC Triangle Post Reticle
 Black: ■ TR24 ■ TR24G ■ TR24R
- 30mm Rifle scope with German #4 Crosshair Reticle
 Black: ■ TR24-3 ■ TR24-3G
- 30mm Rifle scope with Standard Duplex Crosshair Reticle
 Black: ■ TR24-C-200070 ■ TR24-C-200071



1-6x24




- 30mm Rifle scope with Standard Duplex Crosshair Reticle
 Black: ■ TR25-C-200080
- 30mm Rifle scope with German #4 Crosshair Reticle
 Black: ■ TR25-C-200083
- 30mm Rifle scope with Circle-Cross Crosshair Reticle
 Black: ■ TR25-C-200086
- 30mm Rifle scope with MOA Dot Crosshair Reticle
 Black: ■ TR25-C-200089
- 30mm Rifle scope with MIL Dot Crosshair Reticle
 Black: ■ TR25-C-200095
- 30mm Rifle scope with BAC Triangle Post Reticle
 Black: ■ TR25-C-200092 ■ TR25-C-20009 ■ TR25-C-200091

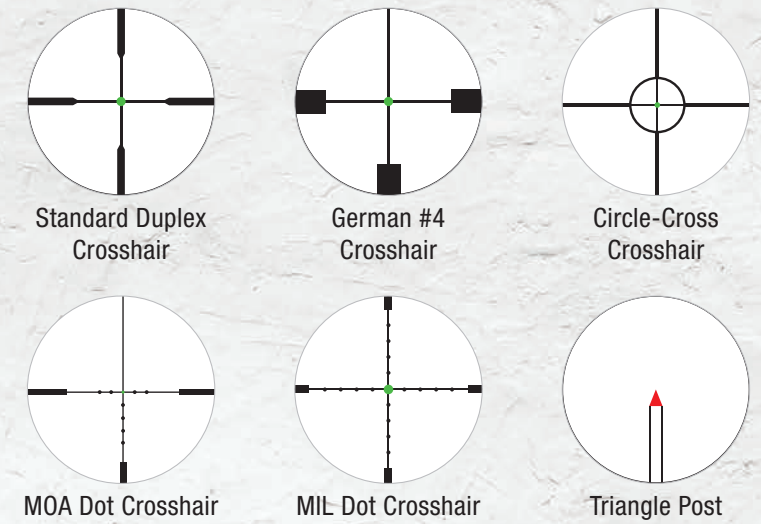

2.5-12.5x42



30mm Rifle Scope with Standard Duplex Crosshair Reticle

Black:  TR26-C-200098


30mm Rifle Scope with MOA Dot Crosshair Reticle


Black:  TR26-C-200104

30mm Rifle Scope with MIL Dot Crosshair Reticle


Black:  TR26-C-200110

30mm Rifle Scope with BAC Triangle Post Reticle


Black:  TR26-C-200107  TR26-C-200105  TR26-C-200106




Standard Duplex Crosshair



MOA Dot Crosshair



MIL Dot Crosshair






Triangle Post



2.5-10x56





30mm Rifle Scope with BAC Triangle Post Reticle


Black:  TR22  TR22G  TR22R

30mm Rifle Scope with Standard Duplex Crosshair Reticle


Black:  TR22-1  TR22-1G

30mm Rifle Scope with MIL Dot Crosshair Reticle


Black:  TR22-2  TR22-2G



Triangle Post



Standard Duplex Crosshair



MIL Dot Crosshair



3-9x40





1 in. Rifle Scope with BAC Triangle Post Reticle

Black:  TR20  TR20G  TR20R

1 in. Rifle Scope with Standard Duplex Crosshair Reticle

Black:  TR20-1  TR20-1G

1 in. Rifle Scope with MIL Dot Crosshair


Black:  TR20-2  TR20-2G



Triangle Post



Standard Duplex Crosshair




MIL Dot Crosshair

4-16x50



30mm Rifle Scope with Standard Duplex Crosshair Reticle

Black:  TR29-C-200131

30mm Rifle Scope with MOA Dot Crosshair Reticle


Black:  TR29-C-200132

30mm Rifle Scope with MIL Dot Crosshair Reticle

Black:  TR29-C-200133

30mm Rifle Scope with BAC Triangle Post Reticle


Black:  TR29-C-200134  TR29-C-200135  TR29-C-200136




Triangle Post



Standard Duplex Crosshair



MIL Dot Crosshair



MOA Dot

5-20x50



30mm Rifle Scope with BAC Triangle Post Reticle


Black: ■ TR23 ■ TR23G ■ TR23R

30mm Rifle Scope with Standard Duplex Crosshair Reticle

Black: ■ TR23-1 ■ TR23-1G

30mm Rifle Scope with MIL Dot Crosshair Reticle


Black: ■ TR23-2 ■ TR23-2G



Triangle Post



Standard Duplex Crosshair



MIL Dot Crosshair





Trijicon

AccuPower®

THE POWER OF SUPERIOR CLARITY

The Trijicon AccuPower® is a versatile, variable-powered riflescope with an electronic-illuminated reticle. Featuring a premium lens system with full multi-layer coatings, the AccuPower provides an incredibly clear sight picture. The reticle illumination is powered by a single CR2032 lithium battery and has an easy-to-operate brightness adjustment dial with multiple brightness settings and an “off” feature between each setting.

MODELS



1-4x24



1-8x28



2.5-10x56



3-9x40



4-16x50



4.5-30x56



5-50x56

Trijicon AccuPower®

FEATURES

ILLUMINATED RETICLE

Powered by a CR2032 lithium battery.

ADJUSTABLE BRIGHTNESS SETTINGS

Multiple brightness settings with an "off" feature between each brightness setting.

AIRCRAFT-GRADE ALUMINUM HOUSING

All-weather rugged construction protects against the toughest elements.

SUPERIOR QUALITY LENSES

Multi-coated lenses provide superior clarity and light-gathering capability with zero distortion.

SECOND FOCAL PLANE RETICLE

Reticle size remains constant as magnification increases, which provides a more exact aiming point at higher magnifications.

FIRST FOCAL PLANE RETICLE

(1-8x28 and 4.5-30x56 FFP)

Reticle subtensions used for ranging and wind holds will remain constant at any magnification, allowing the user to rapidly apply the correct hold.

EASY-FOCUS EYEPIECE

EASY-TO-SET/RESET ADJUSTERS

WATERPROOF TO 3 METERS (10 ft.)

Dry nitrogen-filled to eliminate fogging.

LIMITED LIFETIME WARRANTY

Electronics warranted for 5 years from date of original manufacture.

The adjustable brightness settings on the AccuPower® make it a great solution for any lighting condition.

The user can adjust the reticle illumination to suit their situation and ensure the most accurate shot.



SPECIFICATIONS

	1-4x24	1-8x28	2.5-10x56	3-9x40
MAGNIFICATION	1 – 4x	1 – 8x	2.5 – 10x	3 – 9x
OBJECTIVE LENS	24mm	28mm	56mm	40mm
FOCAL PLANE	Second	First	Second	Second
EYE RELIEF	3.5 in. Constant 88mm Constant	4.0 – 3.9 in. 101 – 99mm	4.0 in. Constant 102mm	3.7 – 3.5 in. 93 – 90mm
EXIT PUPIL	0.60 – 0.20 in. 15.0 – 5.0mm	0.46 – 0.14 in. 11.8 – 3.5mm	0.65 – 0.22 in. 16.5 – 5.6mm	0.52 – 0.17 in. 13.3 – 4.4mm
FIELD OF VIEW (DEGREES)	18.0° – 4.6°	20° – 2.5°	7.2° – 1.9°	6.8° – 2.3°
FIELD OF VIEW	97.5 – 24.2 ft. @ 100 yds. 32.5 – 8.1m @ 100m	109.2 – 13.1 ft. @ 100 yds. 36.4 – 4.4m @ 100m	37.9 – 10.2 ft. @ 100 yds. 12.6 – 3.4m @ 100m	35.5 – 11.8 ft. @ 100 yds. 11.8 – 3.9m @ 100m
ADJUSTMENTS	1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click 0.1 MIL Per Click
ADJUSTMENT RANGE (ELEVATION & WINDAGE)	100 MOA Total Travel 29.6 MIL Total Travel	100 MOA Total Travel 29.6 MIL Total Travel	60 MOA Total Travel 17.8 MIL Total Travel	60 MOA Total Travel 17.8 MIL Total Travel
PARALLAX ADJUSTMENT RANGE	N/A	N/A	N/A	N/A
DIMENSIONS (L X W X H)	10.2 x 2.6 x 2.2 in. 260 x 66 x 56mm	10.8 x 3.125 x 2.7 in. 274.3 x 79.4 x 68.6mm	13.8 x 2.6 x 2.6 in. 351 x 66 x 66mm	12.3 x 2.5 x 2.2 in. 312 x 64 x 56mm
WEIGHT	16.2 oz. 459.0g	25.0 oz. 710g	23.6 oz. 669.0g	17.0 oz. 483.0g
TUBE DIAMETER	30mm	34mm	30mm	1 in.
BATTERY LIFE	> 31 Hours at Max Brightness	> 31 Hours at Max Brightness	> 31 Hours at Max Brightness	> 31 Hours at Max Brightness

4-16x50	4.5-30x56	5-50x56
4 – 16x	4.5 – 30x	5 – 50x
50mm	56mm	56mm
Second	First / Second	Second
3.6 – 3.7 in. 92 – 93mm	3.2 – 3.8 in. 82 – 97mm	3.5 – 3.9 in. 89 – 100mm
0.37 – 0.12 in. 9.3 – 3.1mm	0.35 – 0.07 in. 8.8 – 1.9mm	0.28 – 0.04 in. 7.2 – 1.1mm
4.9° – 1.2°	4.72° – 0.71°	4.04° – 0.41°
25.8 – 6.4 ft. @ 100 yds. 8.6 – 2.1m @ 100m	24.7 – 3.7 ft. @ 100 yds. 8.2 – 1.2m @ 100m	21.2 – 2.1 ft. @ 100 yds. 7.1 – 0.7m @ 100m
1/4 MOA Per Click 0.1 MIL Per Click	1/4 MOA Per Click 0.1 MIL Per Click	1/8 MOA Per Click 0.05 MIL Per Click
80 MOA Total Travel 23.7 MIL Total Travel	100 MOA / 29.1 MRAD Total (E) Travel 50 MOA / 14.5 MRAD Total (W) Travel	100 MOA / 29.1 MRAD Total (E) Travel 50 MOA / 14.5 MRAD Total (W) Travel
10 yds. to Infinity	20 yds. to Infinity	10 yds. to Infinity
14.2 x 2.5 x 2.5 in. 360 x 63.5 x 63.5mm	14.3 (FFP-14.2) x 3.6 x 2.9 in. 364 x 92.2 x 73.6mm	16 x 3.6 x 2.9 in. 405.8 x 91.4 x 73.6mm
23.3 oz. 660.0g	36.0 oz. 1,020.6g	38.4 oz. 1,088.6g
30mm	34mm	34mm
> 31 Hours at Max Brightness	> 31 Hours at Max Brightness	> 31 Hours at Max Brightness



1-4x24



1-8x28



2.5-10x56



3-9x40



4-16x50



4.5-30x56



5-50x56

1-4x24



30mm Rifle Scope with MOA Crosshair Reticle

Black: ■ RS24-C-1900000 ■ RS24-C-1900001

30mm Rifle Scope with MIL Square Crosshair Reticle


Black: ■ RS24-C-1900002 ■ RS24-C-1900003

30mm Rifle Scope with Duplex Crosshair Reticle


Black: ■ RS24-C-1900004 ■ RS24-C-1900005

30mm Rifle Scope with .223/55gr BDC Segmented-Circle/Dot Crosshair

Black: ■ RS24-C-1900006 ■ RS24-C-1900007




MOA Crosshair



MIL Square Crosshair



Duplex



Segmented-Circle/Dot

1-8x28



34mm Rifle Scope with MOA Segmented Circle Reticle

Black: ■ RS27-C-1900026 ■ RS27-C-1900027

34mm Rifle Scope with MIL Segmented Circle Reticle

Black: ■ RS27-C-1900028 ■ RS27-C-1900029



MOA Segmented Circle



MIL Segmented Circle

2.5-10x56



3-9x40



4-16x50



30mm Rifle Scope with MOA Crosshair Reticle


Black: ■ RS22-C-1900014 ■ RS22-C-1900015

30mm Rifle Scope with MIL Square Crosshair Reticle

Black: ■ RS22-C-1900016 ■ RS22-C-1900017

30mm Rifle Scope with Duplex Crosshair Reticle

Black: ■ RS22-C-1900018 ■ RS22-C-1900019



MOA Crosshair



MIL Square Crosshair



Duplex

1 in. Rifle Scope with MOA Crosshair Reticle


Black: ■ RS20-C-1900008 ■ RS20-C-1900009

1 in. Rifle Scope with MIL Square Crosshair Reticle


Black: ■ RS20-C-1900010 ■ RS20-C-1900011

1 in. Rifle Scope with Duplex Crosshair Reticle

Black: ■ RS20-C-1900012 ■ RS20-C-1900013



MOA Crosshair



MIL Square Crosshair



Duplex

30mm Rifle Scope with MOA Crosshair Reticle


Black: ■ RS29-C-1900020 ■ RS29-C-1900021

30mm Rifle Scope with MIL Square Crosshair Reticle

Black: ■ RS29-C-1900022 ■ RS29-C-1900023

30mm Rifle Scope with Duplex Crosshair Reticle

Black: ■ RS29-C-1900024 ■ RS29-C-1900025



MOA Crosshair



MIL Square Crosshair



Duplex

4.5-30x56 (First Focal Plane)



34mm Riflescope with MOA Dot FFP Crosshair Reticle w/ Red & Green LED

Black:  RS30-C-1900032

34mm Riflescope MRAD Dot FFP Crosshair Reticle w/ Red & Green LED

Black:  RS30-C-1900033



MOA



MRAD

4.5-30x56 (Second Focal Plane)



34mm Riflescope with MOA SFP Crosshair Reticle w/ Red & Green LED


Black:  RS30-C-1900034

34mm Riflescope with MRAD SFP Crosshair Reticle w/ Red & Green LED

Black:  RS30-C-1900035



MOA



MRAD

5-50x56




34mm Riflescope with MOA Crosshair Reticle w/ Red & Green LED


Black:  RS50-C-1900030

34mm Riflescope with MRAD Crosshair Reticle w/ Red & Green LED

Black:  RS50-C-1900031



MOA



MRAD





Trijicon
VCOG®

EXTREME DURABILITY. ABSOLUTE PRECISION.

The Trijicon VCOG® (Variable Combat Optical Gunsight) is a rugged, variable-powered riflescope with an LED-illuminated first focal plane reticle. The VCOG is designed for extreme durability and features outstanding glass quality. The magnification range accommodates CQB and long-distance marksmanship. The VCOG is a MIL-SPEC-grade optic, robust enough for any application.

MODELS



1-6x24 (with Thumbscrew Mount)



1-6x24 (with Quick-Release Mount)

FEATURES

FIRST FOCAL PLANE RETICLE

Allows user to rapidly acquire target and apply correct hold throughout magnification range.

SUPERIOR QUALITY GLASS

Multi-coated lenses provide superior clarity and light-gathering capabilities with zero distortion.

RUGGED ALUMINUM-ALLOY HOUSING

Forged 7075-T6 aircraft-aluminum-alloy housing provides for a nearly indestructible sighting system.

ILLUMINATED RETICLE

Powered by a single AA battery.

BDC AND UNIVERSAL RETICLES

Choose from Bullet Drop Compensating (BDC) and Ranging reticles for quick and accurate range estimation or Universal MIL and MOA reticles to accommodate multiple calibers, ammunition weights and barrel lengths.

EASY-TO-SET ADJUSTERS

Adjustments are easy and precise without requiring tools.

NO RINGS NEEDED

The need for conventional ring mounts is eliminated with the integrated mounting adapter that provides quick and easy mounting to any rail system. Compatible with many rails in the marketplace designed to fit the Trijicon ACOG®.

RUGGED & DURABLE

Tested to MIL-STD-810G, a series of tests approved by the U.S. Department of Defense to simulate conditions in the field.

ADJUSTABLE BRIGHTNESS SETTINGS

Six user-selectable brightness settings.

QUICK MAGNIFICATION ADJUSTMENTS

Integrated dial fin allows easy rotation through magnification settings.

CONSTANT EYE RELIEF

No head or stock adjustments throughout entire magnification range.

WATERPROOF TO 20 METERS (66 ft.)

Dry nitrogen-filled to eliminate fogging.

LIMITED LIFETIME WARRANTY

Electronics are warranted for 5 years from date of original manufacture.



The Trijicon 1-6x24 VCOG® has a specially designed housing that features a keyway. This keyway, or indentation, provides structural rigidity to the RMR® mounting adapter, preventing unwanted rotation.



SPECIFICATIONS

	1-6x24
MAGNIFICATION	1 – 6x
OBJECTIVE LENS	24mm
FOCAL PLANE	First
EYE RELIEF	4 in. Constant 101.6mm
EXIT PUPIL	0.41 – 0.15 in. 10.4 – 3.8mm
FIELD OF VIEW (DEGREES)	18.0 – 3.0°
FIELD OF VIEW	95 – 15.9 ft. @ 100 yds. 31.7 – 5.3m @ 100m
ADJUSTMENTS	MIL/MOA .25 MOA/.1 MIL
ADJUSTMENT RANGE (ELEVATION AND WINDAGE)	90 MOA Total Travel (35 MOA Per Revolution)
DIMENSIONS (L X W X H)	10.05 x 2.51 x 2.73 in. 255 x 64 x 69mm
WEIGHT	23.2 oz. (w/o Mount or Battery) 657.7g
ILLUMINATION SOURCE	LED Powered by a Single Lithium or Alkaline AA Battery
BATTERY LIFE	700 Hours (Red), 1400 Hours (Green) Continuous Use at Brightness Setting 4 of 6* (Lithium Battery)
BRIGHTNESS SETTINGS	6

*When used at 70°F (21°C). Extreme temperatures (high or low) will affect lithium battery performance.

1-6x24 (with Thumbscrew Mount)



1-6x24 (with Quick-Release Mount)



Riflescope Segmented Circle / Crosshair .223 / 55 Grain Ballistic Reticle

Black: VC16-C-1600000 VC16-C-1600040

Riflescope Segmented Circle / Crosshair .223 / 77 Grain Ballistic Reticle

Black: VC16-C-1600001 VC16-C-1600041

Riflescope Horseshoe Dot / Crosshair .223 / 55 Grain Ballistic Reticle

Black: VC16-C-1600002 VC16-C-1600042

Riflescope Horseshoe Dot / Crosshair .223 / 77 Grain Ballistic Reticle

Black: VC16-C-1600003 VC16-C-1600043

Riflescope Segmented Circle / Crosshair .308 / 175 Grain Ballistic Reticle

Black: VC16-C-1600004 VC16-C-1600044

Riflescope Horseshoe Dot / Crosshair .308 / 175 Grain Ballistic Reticle

Black: VC16-C-1600005 VC16-C-1600045

Riflescope Segmented Circle / Crosshair 300 BLK Ballistic Reticle

Black: VC16-C-1600006 VC16-C-1600046

Riflescope Segmented Circle / Crosshair .223 / 55 Grain Ballistic Reticle

Black: VC16-C-1600007 VC16-C-1600047

Riflescope Segmented Circle / Crosshair .223 / 77 Grain Ballistic Reticle

Black: VC16-C-1600008 VC16-C-1600048

Riflescope Horseshoe Dot / Crosshair .223 / 55 Grain Ballistic Reticle

Black: VC16-C-1600009 VC16-C-1600049

Riflescope Horseshoe Dot / Crosshair .223 / 77 Grain Ballistic Reticle

Black: VC16-C-1600010 VC16-C-1600050

Riflescope Segmented Circle / Crosshair .308 / 175 Grain Ballistic Reticle

Black: VC16-C-1600011 VC16-C-1600051

Riflescope Horseshoe Dot / Crosshair .308 / 175 Grain Ballistic Reticle

Black: VC16-C-1600012 VC16-C-1600052

Riflescope Segmented Circle / Crosshair 300 BLK Ballistic Reticle

Black: VC16-C-1600013 VC16-C-1600053

Riflescope Segmented Circle / Crosshair MOA

Black: VC16-C-1600035 VC16-C-1600036

Riflescope Segmented Circle / Crosshair MIL


Black: VC16-D-1600037 VC16-D-1600038




Segmented Circle



Segmented Circle



Segmented Circle
MIL




Segmented Circle
MOA



Horseshoe Dot



Horseshoe Dot



Segmented Circle /
300 BLK



Segmented Circle /
300 BLK



Trijicon® Electro Optics

TAKE ON THE NIGHT.

Trijicon's advanced thermal imaging riflescopes are trusted by the most demanding shooters around the world to get the job done with accuracy and speed no matter what. No matter when.

Choose from thermal imaging monoculars, helmet sights, weapon sights and clip-on sights. Conquer darkness with Trijicon®.



REAP-IR®



IR-HUNTER®



IR-PATROL®



SNIPE-IR®

Trijicon **REAP-IR[®]** MINI THERMAL RIFLESCOPE



GET ROUNDS ON TARGET FASTER THAN EVER.

The Trijicon REAP-IR[®] mini thermal riflescope is a small, light, powerful thermal riflescope that lets you engage targets in any light. It's trusted by the most demanding shooters and hunters who require speed and accuracy for nighttime use. Choose from multiple magnification levels and fields of view to fit your specific needs.

MODELS



IRMS-20-2



IRMS-35



IRMS-35-2



IRMS-60-2

Trijicon REAP-IR®

FEATURES

640x480 THERMAL SENSOR

Offers clear, crisp imagery through smoke, dust and complete darkness.

THUMBSTICK SYSTEM CONTROLLER

Fully ruggedized, weatherproof, multi-directional thumbstick control.

12 MICRON TECHNOLOGY

60 Hz frame-rate system with 42% increase in magnification over 17 micron technology.

STADIAMETRIC RANGING

Determine your distance at a moment's notice.

RETICLE DIGITAL READOUTS

Displays your current reticle position in the lower-left corner of the screen.

EDGE DETECT MODE

Offers a fraction of the brightness of other modes so your eyes are not as prone to night blindness from the screen.

8x DIGITAL ZOOM

Advanced built-in sighting system maintains boresight and increases MOA accuracy.

MADE IN THE USA

Built for shooters by shooters right here in America.

MODELS

	MODEL	MAGNIFICATION			LENS	BASE FOV
		OPTICAL	DIGITAL	TOTAL		
ITAR	IRMS-20-2	1.5x	8x	12x	19mm f/1.1	22°
ITAR	IRMS-35	2.5x	8x	20x	35mm f/1.1	12°
ITAR	IRMS-35-2	2.5x	8x	20x	35mm f/1.1	12°
ITAR	IRMS-60-2	4.5x	8x	36x	60mm f/1.25	7°

For more information about Trijicon® Electro Optics Division products, visit TrijiconEO.com.

ITAR ITAR controlled item. For export restrictions on all products, see page 153.



EASY ZERO*

Intuitive "easy zero" method ensures that you get rounds on target faster than ever.

RUGGEDIZED BATTERY COMPARTMENT*

Top-loading battery compartment is designed for fast and easy battery changes even in the harshest conditions.

PICATINNY RAIL INTERFACE*

Integral picatinny top rail for accessory mounting

*Available only on the IRMS-20-2, IRMS-35-2 and IRMS-60-2 models.



IRMS-20-2



IRMS-35-2



IRMS-60-2

12µm vs. 17µm Core Technology



17 micron



12 micron
Trijicon®

640x480 vs. 320x240 Resolution



320x240







640x480
Trijicon®



Trijicon® Electro Optics
12µm, 640x480 @ 60Hz

INCLUDED RETICLES



BLACK HOT



WHITE HOT



EDGE DETECT



Trijicon IR-HUNTER® THERMAL RIFLESCOPE

LIGHTS-OUT PRECISION FOR A SUPERIOR HUNTING ADVANTAGE

Take advantage of a 640x480, 12 micron sensor, Enhanced Target Recognition (ETR), 8x digital electronic zoom, a 60 Hz frame-rate system and a MIL-SPEC design for crisp, precise imagery that lets you hunt for hours. And with similar turret knob controls as your day optic, the IR-HUNTER® lets you take your shot with confidence. Even in complete darkness.

MODELS



IRMK2-20

- > 1.5x OPTICAL/8x DIGITAL
- > 22° FIELD OF 8x VIEW
- > SINGLE-LEVER MOUNT



IRMK2-35

- > 2.5x OPTICAL/8x DIGITAL
- > 12° FIELD OF 8x VIEW
- > SINGLE-LEVER MOUNT



IRMK3-35

- > 2.5x OPTICAL/8x DIGITAL
- > 12° FIELD OF 8x VIEW
- > AZIMUTH/ELEVATION POSITION READOUTS

- > STADIAMETRIC RANGEFINDER
- > DUAL-LEVER MOUNT
- > BATTERY EXTENDER



IRMK3-60

- > 4.5x OPTICAL/8x DIGITAL
- > 7° FIELD OF 8x VIEW
- > AZIMUTH/ELEVATION POSITION READOUTS

- > STADIAMETRIC RANGEFINDER
- > DUAL-LEVER MOUNT
- > BATTERY EXTENDER

FEATURES

ENHANCED TARGET RECOGNITION (ETR)

To ensure that your imagery isn't washed out against the sky or horizon, IR-HUNTER® focuses its processing power onto your target for precisely detailed images.

DIGITAL FOCUS CONTROL (DFC)

Allows you to not only focus your picture to your optimum setting, it allows you to sharpen your overall picture for extreme detail.

IR WINDOW LENS PROTECTION

Your objective front lens is the most high-tech item on the sight that's exposed to the elements, so we protect it with a highly transmissive, fully replaceable IR window.

8x E-ZOOM DIGITAL ZOOM

A digital electronic zooming system comes standard on the IR-HUNTER® series. This lets you achieve various magnifications quickly. And with the advanced, built-in sighting system, the reticle will maintain boresight and even increase its MOA accuracy.

SUPERIOR PROCESSING POWER

Comes with a 60 Hz frame rate, digital OLED display, 640x480 pixel resolution and 12 micron sensor pitch.

VERSATILE BY DESIGN

Choose your system: standard system, tactical system.

PREMIUM OPTICS

Uses only the best materials in the objective lens assemblies—such as AR-coated GAS-IR lenses—for shock-resistant technology and high environmental durability.

MIL-SPEC CONSTRUCTION

6061-T6 Aluminum Housing.

TURRET ADJUSTMENT KNOBS

Easy, intuitive controls that let you take your shot with confidence.



MODELS

	MODEL	MAGNIFICATION			LENS	BASE FOV
		OPTICAL	DIGITAL	TOTAL		
ITAR	IRMK2-20	1.5x	8x	12x	19mm f/1.1	22°
ITAR	IRMK2-35	2.5x	8x	20x	35mm f/1.1	12°
ITAR	IRMK3-35	2.5x	8x	20x	35mm f/1.1	12°
ITAR	IRMK3-60	4.5x	8x	36x	60mm f/1.25	7°

ITAR ITAR controlled item. For export restrictions on all products, see page 153.



Trijicon IR-PATROL® THERMAL MONOCULAR

THE MULTI-PURPOSE, HIGH-PERFORMANCE THERMAL IMAGING MONOCULAR

Whether your mission is searching for a suspect or securing your position, the Trijicon IR-PATROL® is the ideal multipurpose thermal imaging monocular. It's compact, lightweight and rugged; offering some of the most advanced performance options on the market for a clear, sharp image. Choose from handheld, helmet-mounted or rifle-mounted IR-PATROL systems.

MODELS



LE 100 HANDHELD SCOPE

- > ADVANCED THUMBSTICK CONTROLLER
- > 30 HZ FRAME RATE
- > 19MM OBJECTIVE LENS
- > MAXPOL/E-ZOOM/DFC



LE 100C HANDHELD SCOPE

- > ADVANCED THUMBSTICK CONTROLLER
- > 30 HZ FRAME RATE
- > 19MM OBJECTIVE LENS
- > MAXPOL/E-ZOOM/DFC
- > IMAGE CAPTURE
- > DOWNLOAD CABLE AND PC SOFTWARE



M250 HELMET-MOUNTED SYSTEM

- > 60 HZ FRAME RATE
- > MAXPOL/E-ZOOM/DFC
- > IMAGE CAPTURE
- > EDGE DETECT MODE
- > OPTIONAL WILCOX® HELMET INTERFACE KIT



M300W RIFLE-MOUNTED SYSTEM

- > 60 HZ FRAME RATE
- > MAXPOL/E-ZOOM/DFC
- > IMAGE CAPTURE
- > EDGE DETECT MODE
- > OPTIONAL WILCOX® SIDE-FLIP MOUNT
- > OPTIONAL WILCOX® HELMET INTERFACE KIT



M250XR EXTENDED RANGE HAND-HELD SCOPE

- > 60 HZ FRAME RATE
- > 60MM F/1.25 OBJECTIVE LENS
- > WHITE HOT/BLACK HOT POLARITY LEVELS
- > 4.5 OPTICAL ZOOM/8X DIGITAL ZOOM
- > STADIAMETRIC RANGEFINDER
- > 1/4-20 TRIPOD MOUNT INTERFACE

FEATURES

SUPERIOR PROCESSING POWER

Comes with a digital OLED display, 640x480 pixel resolution and 12 micron sensor pitch.

VERSATILE BY DESIGN

Choose from handheld, helmet-mounted or rifle-mounted IR-PATROL® system.

HANDS-FREE OBSERVATION

With the IR-PATROL® M250, you can take advantage of the lightweight design and fast, 60 Hz frame-rate system that is optimized for helmet mounting. The optional Wilcox® adapter kit makes it easy to fit the system on most helmets.

THUMBSTICK SYSTEM CONTROLLER

Our fully ruggedized, weatherproof, multidirectional thumbstick control comes standard. Unlike most conventional buttons, the IR-PATROL® controls are large and easy to find in complete darkness.

ITAR ITAR controlled item. For export restrictions on all products, see page 153.



SYSTEM	LE100	LE100C	M250XR	M250
APPLICATION	Handheld / Tripod Mounted	Handheld / Tripod Mounted	Handheld / Tripod Mounted	Handheld / Helmet Mounted
SENSOR RESOLUTION	640x480	640x480	640x480	640x480
SENSOR MICRON	12 µm	12 µm	12 µm	12 µm
SENSOR TYPE	VOx Vanadium Oxide	VOx Vanadium Oxide	VOx Vanadium Oxide	VOx Vanadium Oxide
FRAME RATE	30 Hz	30 Hz	60 Hz	60 Hz
DISPLAY TYPE	Digital OLED	Digital OLED	Digital OLED	Digital OLED
THERMAL SENSITIVITY	< 50 mK	< 50 mK	< 50 mK	< 50 mK
SPECTRAL RESPONSE	8-12 MICRONS	8-12 MICRONS	8-12 MICRONS	8-12 MICRONS
FIELD OF VIEW	22°	22°	7°	22°
EYE RELIEF	27mm	27mm	27mm	27mm
DIOPTR	-6 /+2	-6 /+2	-6 /+2	-6 /+2
MAGNIFICATION / E-ZOOM	1x Optical / 8x Digital	1x Optical / 8x Digital	4.5x Optical / 8x Digital	1x Optical / 8x Digital
OBJECTIVE LENS	19mm f/1.2	19mm f/1.2	60mm f/1.25	19mm f/1.2
BATTERY TYPE	CR123 Lithium	CR123 Lithium	CR123 Lithium	CR123 Lithium
BATTERY LIFE	Approx. 2 hours / battery	Approx. 2 hours / battery	Approx. 2 hours / battery	Approx. 2 hours / battery
ENVIRONMENTAL	-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage
WEIGHT	16 oz. / 454g	16 oz. / 454g	27 oz. / 755g	16 oz. / 454g
DIMENSIONS (L X H X W)	5.95 in. x 2.0 in. x 2.95 in.	5.95 in. x 2.0 in. x 2.95 in.	8.0 in. x 3.3 in. x 3.0 in.	5.95 in. x 2.0 in. x 2.95 in.
USER INTERFACE	Thumbstick	Thumbstick	Thumbstick	Thumbstick
MOUNTING KIT	¼-20 Interface	¼-20 Interface	¼-20 Interface	Wilcox® Shoe Interface
DOWNLOAD CABLE		✓	✓	
SHOE INTERFACE				✓
POLARITY / E-ZOOM	✓	✓	✓	✓
EDGE DETECT			✓	✓
IMAGE CAPTURE		✓	✓	✓
VIDEO OUT			✓	✓
RETICLE FEATURE				
CONFIGURATION LEVEL			✓	✓



M250K	M300	M300K	M300TK
Handheld / Helmet Mounted	Handheld / Helmet Mounted / Rifle	Handheld / Helmet Mounted / Rifle	Handheld / Helmet Mounted / Rifle
640x480	640x480	640x480	640x480
12 µm	12 µm	12 µm	12 µm
VOx Vanadium Oxide	VOx Vanadium Oxide	VOx Vanadium Oxide	VOx Vanadium Oxide
60 Hz	60 Hz	60 Hz	60 Hz
Digital OLED	Digital OLED	Digital OLED	Digital OLED
< 50 mK	< 50 mK	< 50 mK	< 50 mK
8-12 MICRONS	8-12 MICRONS	8-12 MICRONS	8-12 MICRONS
22°	22°	22°	22°
27mm	27mm	27mm	27mm
-6 /+2	-6 /+2	-6 /+2	-6 /+2
1x Optical / 8x Digital	1x Optical / 8x Digital	1x Optical / 8x Digital	1x Optical / 8x Digital
19mm f/1.2	19mm f/1.2	19mm f/1.2	19mm f/1.2
CR123 Lithium	CR123 Lithium	CR123 Lithium	CR123 Lithium
Approx. 2 hours / battery	Approx. 2 hours / battery	Approx. 2 hours / battery	Approx. 2 hours / battery
-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage	-40°C to +55°C Operating -45°C to +75°C Storage
16 oz. / 454g	16 oz. / 454g	16 oz. / 454g	16 oz. / 454g
5.95 in. x 2.0 in. x 2.95 in.	5.95 in. x 2.0 in. x 2.95 in.	5.95 in. x 2.0 in. x 2.95 in.	5.95 in. x 2.0 in. x 2.95 in.
Thumbstick	Thumbstick	Thumbstick	Thumbstick
Wilcox® Shoe Interface Wilcox® Bridge Assembly	Wilcox® Shoe Interface	Wilcox® Shoe Interface Wilcox® Flip to Side Rifle Mount	Wilcox® Shoe Interface Wilcox® Bridge Assembly Wilcox® Flip to Side Rifle Mount
✓		✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓
✓	✓	✓	✓

Trijicon IR-PATROL®

EDGE DETECT TACTICAL MODE

This is an entirely new way to view your target with more precision. Edge Detect Mode is a fraction of the brightness of other modes so your eyes are not as prone to night blindness from the screen.

MAXPOL POLARITY WHITE HOT/ BLACK HOT

The IR-PATROL® comes with an easy-to-control polarity mode that lets you switch between three levels of white hot and three levels of black hot. Why limit yourself to one setting? With low, medium and high levels, you can pick your perfect mode.





Trijicon
SNiPE-IR®
THERMAL CLIP-ON

THE NEXT-GENERATION CLIP-ON SIGHT

The Trijicon SNiPE-IR® is designed to become one with your optical day sight, both on the battlefield and on the hunting field. It comes with a 640x480, 12 micron VOx sensor and OLED digital micro display that give you clear, brilliant imagery at a fast 60 Hz frame-rate system—even through pitch-black darkness. The Trijicon SNiPE-IR is optimized for use with a 4x day optic but will work with variable sights up to approximately 6x.

MODELS



IRCO-35

FEATURES

DIGITAL OLED DISPLAY

640x480 OLED offers a pixel-to-pixel match with the sensor for the clearest possible image.

12 MICRON TECHNOLOGY

Incredible image quality and 42% increase in magnification over 17 micron sensors.

NO-SHOT ZERO SIGHT-IN

Easy sight-in integration for accurate calibrations.

VISRELAY COLLIMATES LIGHT FOR DAY OPTIC

Eliminates parallax.

60 HZ FRAME-RATE SYSTEM

Get real-time imaging.

12° HORIZONTAL FOV

Enhanced situational awareness for detection and target acquisition.

MODELS

	MODEL	SENSOR	LENS	BASE FOV	MOUNT TYPE
ITAR	IRCO-35	640x480	35mm f/1.14	12°	Mini D-LOC






Trijicon® Archery

THE POWER OF TRITIUM

Bow hunters aren't your average hunters. And these aren't your average, run-of-the-mill bow sights. These are battery-free, technological marvels that help serious hunters own the fields from dawn to dusk, thanks to a tritium-phosphor lamp and superior fiber optics that give you quick target acquisition in low-light conditions. It's what bow hunters deserve.

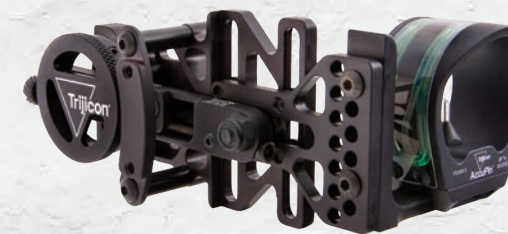

AccuPin®/AccuDial™ Combo



ACOG® XB

The Trijicon AccuPin™ and its combination of fiber optic and tritium are Pope & Young® legal.

Trijicon AccuPin®

FEATURES

TRIANGULAR AIMING POINT AND CLEAR PIN

Precision aiming point with unobstructed view of target.

HIGH-IMPACT SHADE SHIELD

High-visibility aiming circle for optimal aiming-point acquisition and protection.

FIELD-REPLACEABLE PIN

Finger-tighten design makes replacement quick and easy.

FULLY HOUSED SIGHT LEVEL

Helps line up the perfect shot.

TRITIUM-PHOSPHOR LAMP & FIBER OPTICS

Provide illumination for any light condition without batteries.

AIRCRAFT-GRADE 6061-T6 ALUMINUM

Made in the USA and so tough, it's guaranteed for life.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 12 years from date of original manufacture.



This unique pin design is more robust than ordinary bow sights, but on the off chance something happens, the fiber optic pin is easily replaced out in the field with a simple finger twist of the pin fastener nut.

FEATURES

AccuDial™ BOW MOUNT

Enables exact, "on-the-fly" range adjustment and synchronization for any bow/arrow speed combination, thanks to its laser etched dial.

ADJUST TO BOW'S SPEED

Synchronize the AccuDial™ to the bow's speed to utilize ranging dial (speed range 245-335 feet per second)

PRE-SET RANGING DIAL

Easily dial-in on range holdover in one yard increments from 0-80 yards once bow speed is synchronized.



SPECIFICATIONS

AccuPin®	
APERTURE	Single Pin
RIGHT/LEFT HAND	Ambidextrous
ILLUMINATION SOURCE	Fiber Optics & Tritium
PIN STYLE	Triangle
SIGHT WINDOW	1.77 in. 45mm
DIMENSIONS (L X W X H)	1.5 x 2.1 x 2.5 in. 38 x 53 x 64mm
WEIGHT	Dovetail Base: 2.29 oz. (65g) Rail Grabber Base: 2.47 oz. (70g)
MOUNT OPTIONS	<ul style="list-style-type: none"> - Dovetail base that mounts to an L-bracket which will attach to the Trijicon AccuDial™ or other adjustable mounts. - Rail grabber-style mount base attaches to adjustable mounts equipped with a Weaver® or MIL-STD-1913 (Picatinny) rail, including the Trijicon AccuDial adjustable mount and rail adapter.

AccuDial™	
RIGHT/LEFT HAND	Available in Both Configurations
BOW SPEED	245 – 335 ft./sec. 74.7 – 102.1m/s
TARGET RANGE	0 – 80+ yds. 0 – 73.2m
ADJUSTMENT INCREMENTS	1 yd. .91m
DIMENSIONS (L X W X H)	6.0 x 3.7 x 2.8 in. 152 x 94 x 71mm
WEIGHT	8.0 oz. 226.8g
SIGHTS IT ACCEPTS	<ul style="list-style-type: none"> - Trijicon AccuPin® Sight - Side-mounted apertures/scope which utilize #10-32 studs - Sights with Weaver® or MIL-STD-1913 Picatinny bases (requires rail adapter)

AccuPin®



Bow Sight with Dovetail Base

Black: ■ BW01G-BL

Bow Sight with Rail Grabber Base

Black: ■ BW02G-BL

AccuDial™



Right-Hand Mount with Sight Bracket and Rail Adapter

Black: BW10-BL

Left-Hand Mount with Sight Bracket and Rail Adapter

Black: BW11-BL

Combo



Right-Hand AccuPin® Bow Sight with AccuDial® Mount

Black: ■ BW50G-BL

Left-Hand AccuPin Bow Sight with AccuDial Mount

Black: ■ BW51G-BL

Trijicon ACOG® XB

FEATURES

BOLT-DROP COMPENSATOR

Designed to be zeroed at 30 yards with stadia lines out to 80-yards in 5-yard increments.

TOTALLY BATTERY-FREE

Trijicon ACOG® XB delivers increased hit potential in all lighting conditions—without the use of batteries.

TRIJICON® FIBER OPTICS

Automatically adjusts the brightness level and contrast of the reticle to available light conditions.

TRITIUM-PHOSPHOR LAMP

Aiming reticle glows in low-light conditions for quick target acquisition. Lamp is guaranteed to illuminate for 15 years.

LIGHTWEIGHT RUGGEDNESS

Forged 7075-T6 aircraft-grade-aluminum housing provides extreme durability in a compact design and will withstand the shock pattern of all crossbows.

BROADBAND ANTI-REFLECTIVE COATED LENSES

Multi-coated lens provides superior clarity and light-gathering capabilities with zero distortion.

INTERNALLY ADJUSTABLE

Since only the prism housing moves, the Trijicon ACOG® XB is much more rugged than conventional designs.

WATERPROOF TO 20 METERS (66 ft.)

Dry nitrogen-filled to prevent fogging.

LIMITED LIFETIME WARRANTY

Tritium lamp is warranted to illuminate for 15 years from date of manufacture.

Instead of using batteries that tend to fail hunters when they need them most, the ACOG® XB uses fiber optics and tritium to offer target acquisition you can trust in low-light conditions.



SPECIFICATIONS

SYSTEM	3X24 XB
MAGNIFICATION	3x
OBJECTIVE LENS	24mm
EYE RELIEF	1.4 in. 35.6mm
EXIT PUPIL	0.32 in. 8.1mm
FIELD OF VIEW (DEGREES)	4.9°
FIELD OF VIEW	25.6 ft. @ 100 yds. 8.6m @ 100m
ADJUSTMENTS	7 Clicks Per in. @ 30 yds.
DIMENSIONS (L X W X H)	5.0 x 1.6 x 2.1 in. 127 x 42 x 53mm
WEIGHT	6.1 oz. 218.2g
ILLUMINATION SOURCE	Fiber Optics & Tritium
BOLT SPEED	TA50-C-400143 (XB1): 300 – 340 fps TA50-C-400144 (XB2): 340 – 400 fps TA50-C-400145 (XB3): 400 – 440+ fps Note: If your bolt speed borders between two models, choose the model with the lower speed.

3x24 XB



Dual-Illuminated Chevron, 300-340 fps Bolt Drop Compensation and Bad River Outdoors® Ranging System with Low Weaver Mount


Black: ■ TA50-C-400143

Dual-Illuminated Chevron, 340-400 fps Bolt Drop Compensation and Bad River Outdoors® Ranging System with Low Weaver Mount

Black: ■ TA50-C-400144

Dual-Illuminated Chevron, 400-440+ fps Bolt Drop Compensation and Bad River Outdoors® Ranging System with Low Weaver Mount

Black: ■ TA50-C-400145



Chevron



Trijicon®

CUSTOMER CARE