

Intrinsically Safe Permissible Multi-Function Headlamps

XPP-5456G

175 Lumens
Dual-Light™

100 Lumens
Spotlight

90/20 Lumens
White Floodlight

18 Lumens
Red Floodlight




XPP-5458G

190 Lumens
Dual-Light™

130 Lumens
Spotlight

100/25 Lumens
Floodlight

21 Lumens
Green Floodlight

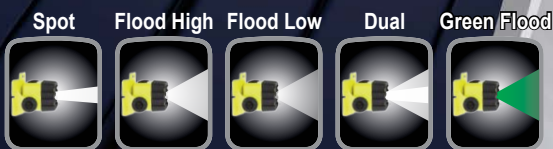

These non-rechargeable multi-function headlamps are cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible. The headlamps each feature a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight and either red (5456) or green (5458) floodlight operation. Power comes from 3 AA premium batteries (included).

**INTRINSICALLY SAFE
PERMISSIBLE**



TECHNOLOGY



- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible
- Beam distance rated at 140/120 meters
- Spotlight, dual brightness white/color floodlight modes
- Powered by 3 AA Premium batteries (included)



XPP 5400 series

Intrinsically Safe Permissible Multi-Function Headlamps

FEATURES: ALL MODELS

- Spotlight CREE® LED technology 50,000 hour life
- Spotlight – high/low-brightness white floodlight – red floodlight (5456)
- Spotlight – high/low-brightness white floodlight – green floodlight (5458)
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Colored floodlight for night vision preservation (red-5456, green-5458)
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Dustproof / Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty

SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible Patent 7,738,229

Permissible Nightstick XPP-5456G Headlamp

MSHA APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
3) Replace the batteries in fresh air only.
4) Replace all batteries at the same time.
5) Do not mix batteries from different manufacturers or of different types.
6) The Model XPP-5456G Safety Headlamp must not be opened in areas where permissibility is required.
7) The Model XPP-5456G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approved as a cap lamp under 30CFR, Part 19.

CLASS I DIV 1 GRPS A-D T3	Ex ia I Ma
CLASS II & III DIV 1 GRPS E-G T135C	Ex ia I C T3 Ga
CLASS I ZONE 0 Ex ia I C T3 Ga	Intrinsically Safe
CLASS I ZONE 0 Ex ia I C T3 Ga	IECEx ETL 13.0025X
CLASS I ZONE 0 Ex ia I C T3 Ga	-20°C ≤ Tamb ≤ +40°C
CLASS I ZONE 0 Ex ia I C T3 Ga	1.5V/Cell AA-Alkaline

CE 0359

Conforms to: ANSII/UL STD 913, ANSII/UL 60079-0, ANSII/UL 60079-11, ANSII/SA 60079-26

Certified to: CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Permissible Nightstick XPP-5458G Headlamp

MSHA APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
3) Replace the batteries in fresh air only.
4) Replace all batteries at the same time.
5) Do not mix batteries from different manufacturers or of different types.
6) The Model XPP-5458G Safety Headlamp must not be opened in areas where permissibility is required.
7) The Model XPP-5458G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approved as a cap lamp under 30CFR, Part 19.

CLASS I DIV 1 GRPS A-D T3	Ex ia I Ma
CLASS II & III DIV 1 GRPS E-G T135C	Ex ia I C T3 Ga
CLASS I ZONE 0 Ex ia I C T3 Ga	Intrinsically Safe
CLASS I ZONE 0 Ex ia I C T3 Ga	IECEx ETL 13.0025X
CLASS I ZONE 0 Ex ia I C T3 Ga	-20°C ≤ Tamb ≤ +40°C
CLASS I ZONE 0 Ex ia I C T3 Ga	1.5V/Cell AA-Alkaline

CE 0359

Conforms to: ANSII/UL STD 913, ANSII/UL 60079-0, ANSII/UL 60079-11, ANSII/SA 60079-26

Certified to: CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5456G	80156 0
XPP-5458G	80158 4



Rubber hardhat strap included

XPP-5456G White & Red Floodlight
XPP-5458G White & Green Floodlight



XPP-5456G SPECIFICATIONS

- Lumens: spotlight-100, high white floodlight-90, low white floodlight-20, red floodlight-18, dual-light-175
- Run-time: spotlight-18 hrs, high white floodlight-13.5 hrs, low white floodlight-75 hrs, red floodlight-37 hrs, dual-light-6.5 hrs
- Beam distance: 140 meters
- Water / Dust rating: IP-67
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL 1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	175 LUMENS	100 LUMENS
	6h 30min	18h
	154m	140m
	5291cd	4820cd
	2m	1m

XPP-5458G SPECIFICATIONS

- Lumens: spotlight-130, high white floodlight-100, low white floodlight-25, green floodlight-21, dual-light-190
- Run-time: spotlight-14 hrs, high white floodlight-12.5 hrs, low white floodlight-70 hrs, green floodlight-37 hrs, dual-light-6 hrs
- Beam distance: 120 meters
- Water / Dust rating: IP-67
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL 1 STANDARD	DUAL-LIGHT	SPOTLIGHT
	190 LUMENS	130 LUMENS
	6h	14h
	132m	120m
	3500cd	3500cd
	2m	1m

INCLUDED

- Headlamp
- 3 premium alkaline AA batteries
- Elastic non-slip headband
- Rubber hardhat strap